



PRODUCT FACT SHEET

TLR-4®

COMPACT RAIL MOUNTED TACTICAL LIGHT WITH RED LASER SIGHT

MARKET

APPLICATIONS: Law Enforcement, Security, Sporting Goods, Consumer

DESCRIPTION: Ultra lightweight & compact, the TLR-4® Weapon-Mounted Tactical Light with integrated aiming laser features the latest in C4® LED technology. The light provides 1.5 hours of continuous runtime when in dual mode with the high power visible laser. Rail clamp designed to rapidly attach/detach from side of weapon.
Models also available for H&K USP Compact frame and H&K USP Full Size frame.

CASE MATERIAL: Body: Impact resistant Engineering polymer. Available in Black.
Facecap: 6000 series machined aircraft aluminum with black anodized finish.

DIMENSIONS: Length: 2.73 in. (6.93 cm) Width: 1.20 in. (3.05 cm) Height: 1.99 in. (5.05 cm)

WEIGHT: 2.81 oz (79.7 grams) with battery (included with purchase).

LENS: Borofloat high temperature glass.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.
640-660nm red laser.

LIGHT OUTPUT: 170 lumens, 3,300 candela peak beam intensity and 115 m beam distance.
Smooth parabolic reflector produces a concentrated beam with optimum peripheral illumination.
Optimized electronics provide regulated intensity.
Laser provides long-range targeting.

ON/OFF: Ambidextrous momentary/steady On-Off switch.
Three position Mode Selector switch for Laser only, LED illumination only or both Laser and LED.

RUN TIME: LED only or LED and Laser: 1.5 hours regulated run time to the 10% output level.
Laser only: 15 hours regulated output.


BATTERY: One (1) 3 Volt CR2 lithium battery, with a storage life of 10 years.

FEATURES: Ultra lightweight and compact.
C4® LED technology.
Ambidextrous momentary/steady On-Off switch.
One handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching.
Securely fits a broad range of weapons using key kit provided (key kit not provided with H&K USP models).
Windage and Elevation adjustment screws mounted in brass bushings for long life and dependable zero retention of laser.
Operating temperature: -20°F to +120°F.
IPX4 rated design; water resistant operation.
Serialized for positive identification.

APPROVALS:  Meets applicable European Community Directives.

WARRANTY: Streamlight's Limited Lifetime Warranty.

OPTIONAL ACCESSORIES: Mounting adapters

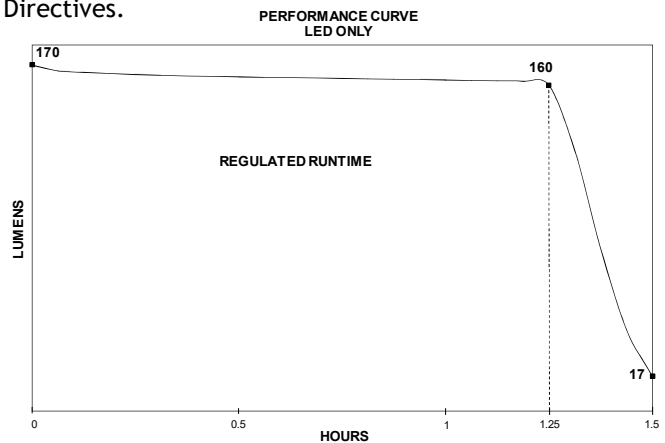

EXPORT CONTROLS: The export of this product is subject to the jurisdiction of the U.S. Department of Commerce Export Administrative Regulations ("EAR"). The exported sale, transfer or shipment of this product is expressly prohibited by U.S. Law and is subject to export restrictions, including export licenses and accompanying documentation and authorization, the absence of which may result in fines and penalties. Furthermore, diversion, resale, re-export or transfer of this product is contrary to U.S. Law and is prohibited without the prior written consent of the U.S. Department of Commerce. Compliance with any and all export controls are the sole responsibility of the distributor.