



PRODUCT FACT SHEET

TLR-4® G

COMPACT RAIL MOUNTED TACTICAL LIGHT WITH GREEN LASER SIGHT

MARKET

APPLICATIONS: Law Enforcement, Security, Sporting Goods, Consumer

DESCRIPTION: Ultra lightweight & compact, the TLR-4® G Weapon-Mounted Tactical Light with integrated green aiming laser features the latest in wide temperature direct drive green laser technology. The light provides 1 hour of continuous runtime when in dual mode with the high power visible laser. Rail clamp designed to rapidly attach/detach from side of weapon. Models also available for H&K USP Compact frame and H&K USP Full Size frame.

CASE MATERIAL: Body: Impact resistant Engineering polymer. Available in Black.
Facecap: 6000 series machined aircraft aluminum with black anodized finish.

DIMENSIONS: Length: 2.73 in. (6.93 cm) Width: 1.20 in. (3.05 cm) Height: 1.99 in. (5.05 cm)

WEIGHT: 2.81 oz (79.7 grams) with battery (included with purchase).

LENS: Borofloat high temperature glass.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.
510-530nm direct drive green laser with wide operating temperature range.

LIGHT OUTPUT: 160 lumens, 3,200 candela peak beam intensity and 113 meters beam distance.
Smooth parabolic reflector produces a concentrated beam with optimum peripheral illumination.
Optimized electronics provide regulated intensity.
Green laser provides high visibility long-range targeting.

ON/OFF: Ambidextrous momentary/steady On-Off switch.
Three position Mode Selector switch for Laser only, LED illumination only or both Laser and LED.

RUN TIME: LED only: 1.75 hours of regulated run time to 10% output. See curve.
LED and Laser: 1.25 hours of LED regulated run time to 10% output; 1 hour of regulated laser runtime.
Laser only: 4 hours regulated output.

BATTERY: One (1) 3 Volt CR2 lithium battery, with a storage life of 10 years.


FEATURES: Ultra lightweight and compact.
High visibility green laser with wide operating temperature.
C4® LED technology.
Ambidextrous momentary/steady On-Off switch.
One handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching.
Securely fits a broad range of weapons using key kit provided (key kit not provided with H&K USP models).
Windage and Elevation adjustment screws mounted in brass bushings for long life and dependable zero retention of laser.
Operating temperature: -20°F to +120°F.
IPX4 rated design; water resistant operation.
Serialized for positive identification.

APPROVALS: Meets applicable European Community Directives.

WARRANTY: Streamlight's Limited Lifetime Warranty.

OPTIONAL

ACCESSORIES: Mounting adapters

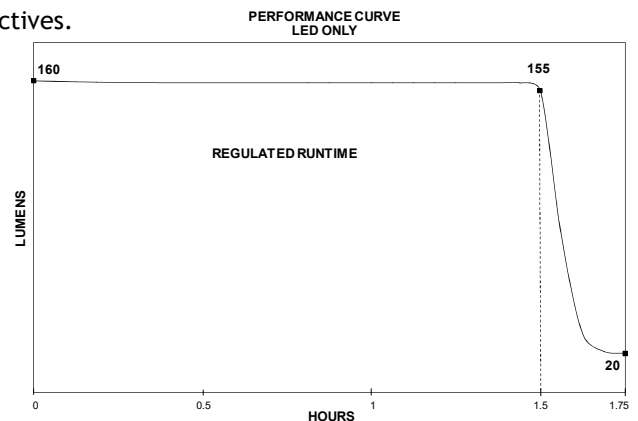

EXPORT CONTROLS: The export of this product is subject to the jurisdiction of the U.S. Department of Commerce Export Administrative Regulations ("EAR"). The exported sale, transfer or shipment of this product is expressly prohibited by U.S. Law and is subject to export restrictions, including export licenses and accompanying documentation and authorization, the absence of which may result in fines and penalties. Furthermore, diversion, resale, re-export or transfer of this product is contrary to U.S. Law and is prohibited without the prior written consent of the U.S. Department of Commerce. Compliance with any and all export controls are the sole responsibility of the distributor.

Issued: 10/17/2013

Revised: 12/08/2017 Rev: 1

Assembled In The USA.

Document #262