

## STINGER® LED or STINGER DS® LED RECHARGEABLE FLASHLIGHT

**MARKET**
**APPLICATIONS:** Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

**DESCRIPTION:**

Compact & extremely powerful, the Stinger® LED and Stinger DS® LED rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in power LED technology. The Stinger DS® LED includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

**CASE MATERIAL:**

6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

**DIMENSIONS:**

Stinger® LED Length: 8.41 in. (21.36 cm)	Diameter: Major Diameter: 1.62 in. (4.11 cm)
Stinger DS® LED Length: 8.85 in. (22.48 cm)	Body Diameter: 1.17 in. (2.97 cm)

**WEIGHT:**

Stinger® LED: 12.4 oz (352 grams)\*      Stinger DS® LED: 12.8 oz (364 grams)\*

**LENS:**

Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

**LIGHT SOURCE:**

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:**

See Chart. Optimized electronics provides regulated intensity. Deep-dish parabolic reflector produces a tight beam with optimum peripheral illumination to aid in navigation.


**ON/OFF:**

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® LED provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

**RUN TIME:**


See Chart. Strobe: 5.50 continuous hours.

**BATTERY:**

3-cell, 3.6 Volt Nickel-cadmium sub-C battery is rechargeable up to 1000 times.

**CHARGING:**

Fits existing Stinger®chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

**FEATURES:**


C4® LED technology for extreme brightness.  
 IPX4 Rated for water resistant operation.  
 1 meter impact resistance tested.  
 Serialized for positive identification.  
 LED Charge-continuity indicator on charger base.  
 Compact, snap-in charger mounts in any position.





**WARRANTY:**


Streamlight warrants this product to be free of defect for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work or that you manage to break for as long as you own it. Of course, this limited lifetime warranty excludes abuse, batteries and chargers. Rechargeable batteries and chargers have a one (1) year warranty with proof of purchase.

**APPROVALS\*\*:**

 Most models meet applicable European Community Directives. **CE**
**OPTIONAL ACCESSORIES:**

Safety wands, ring holder, holster, color filters, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		<b>180</b> LUMENS	<b>95</b> LUMENS	<b>45</b> LUMENS
RUN TIME		<b>2h</b>	<b>3h 45min</b>	<b>7h 15min</b>
DISTANCE		<b>261m</b>	<b>190m</b>	<b>134m</b>
INTENSITY		<b>17,000cd</b>	<b>9000cd</b>	<b>4500cd</b>

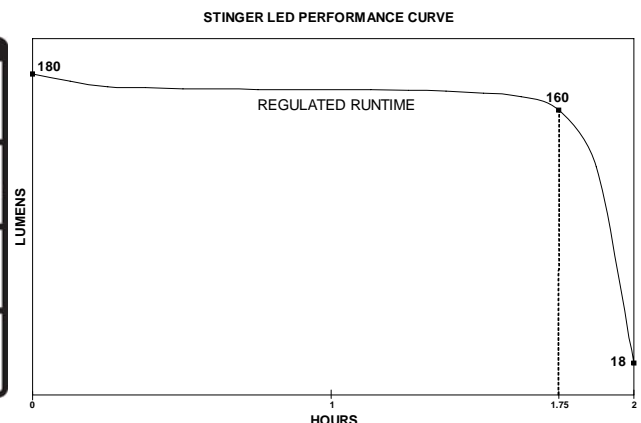

\* With battery (included in purchase)

\*\* See product for specific ratings.

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 10/13/06

Revised: 04/20/10 Rev: 6