

POLYSTINGER® LED or POLYSTINGER DS® LED RECHARGEABLE FLASHLIGHT
MARKET
APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION:

Compact & powerful, the PolyStinger® LED and PolyStinger DS® LED rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in power LED technology. The PolyStinger DS® LED includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL:

Super-tough, non-conductive nylon polymer with non-slip rubberized comfort grip. PolyStinger® LED available in black or yellow. PolyStinger DS® LED available in black only.

DIMENSIONS:

 PolyStinger® LED Length: 8.07 in. (20.50 cm) Diameter: Major Diameter: 1.76 in. (4.47 cm)
 PolyStinger DS® LED Length: 8.64 in. (21.95 cm) Body Diameter: 1.21 in. (3.07 cm)

WEIGHT:

PolyStinger® LED: 11.5 oz (326 grams)* PolyStinger DS® LED: 11.9 oz (338 grams)*

LENS:

Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE:

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See Chart. Optimized electronics provides regulated intensity. Deep-dish parabolic reflector produces a tight beam with optimum peripheral illumination to aid in navigation.


ON/OFF:

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. PolyStinger DS® LED provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME:


See Chart. All claims to 10% of initial lumen output. Strobe: 5.5 continuous hours.

BATTERY:

 3-cell, 3.6 Volt Ni-Cd sub-C battery, rechargeable up to 1000 times.
 3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times offered in 230VAC and 12VDC European systems.

CHARGING:

Fits existing Stinger chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

FEATURES:





 C4® LED technology for extreme brightness.
 IPX4 Rated for water resistant operation.
 3 meter impact resistance tested.
 LED Charge-continuity indicator on charger base.
 Compact, snap-in charger mounts in any position.
 Serialized for positive identification.


WARRANTY:
Streamlight's Limited Lifetime Warranty warrants this product to be free of defect, including the LED, for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, chargers, switches, electronics and normal wear and tear. Rechargeable batteries, chargers, switches and electronics have a two (2) year warranty with proof of purchase.

APPROVALS:**

 Most models meet applicable European Community Directives. 
OPTIONAL ACCESSORIES:

Safety Wands, Holster, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		185 LUMENS	95 LUMENS	45 LUMENS
RUNTIME		2h	3h 45min	7h 15min
DISTANCE		310m	219m	155m
INTENSITY		24,000cd	12,000cd	6000cd

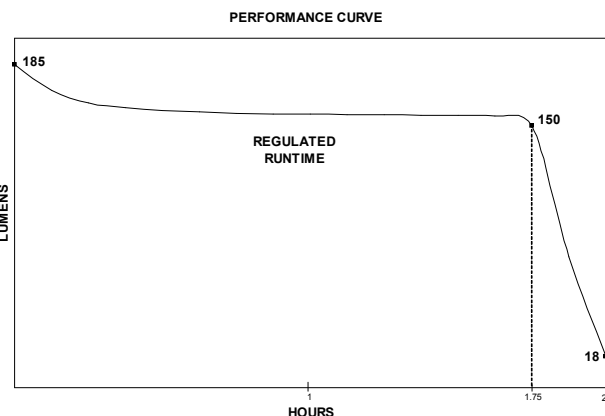

* With battery (included in purchase)

** See product for specific ratings.

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 10/16/08

Revised: 07/27/11 Rev: 3

Assembled In The USA.
Document #205