

STRION® 2020 RECHARGEABLE FLASHLIGHT

DESCRIPTION: The Strion® 2020 features an easy-to-select mode switch positioned at the head of the light. 1,200 lumens, 28,000 candela, and a run time of 1 hour and 45 minutes on high are provided by the additional capacity of the 3450mAh battery. The Strion 2020 offers two independent on/off switches. The head switch, which includes a battery status indicator, and a tail switch.

CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in black.

DIMENSIONS: Length: 6.33 in (16.1 cm) Head Diameter: 1.25 in (3.18 cm)
Barrel Diameter: 0.95 in (2.41 cm) Diameter at Tri-Lobe Anti-Roll Flange: 1.35 in (3.43 cm)

WEIGHT: 5.7 oz (161.6 g) with battery (included in purchase)


LENS/OPTIC: High efficiency TIR optic for optimal light control. Optic impact and chemical resistant.

LIGHT SOURCE: High-power LED, white, impervious to shock with a 50,000-hour lifetime

LIGHT OUTPUT: See chart. Optimized electronics provide regulated intensity.





ON/OFF/INTENSITY: Easily accessible push-button head switch and second push-button tail switch. Both switches offer full control independent of one another. One-handed operation of momentary, constant on, or strobe mode using either switch. Positioned in line with the head switch, the thumb-accessible, three-position slide switch allows for selection of high, medium, or low output. High intensity strobe activated by double click from any mode.

RUN TIME:  See chart. All claims to 10% of initial lumen output. Strobe: 3.5 continuous hours.




BATTERY: Lithium-Ion with on-board safety control circuit, 3.6V, 3450mAh, rechargeable up to 1000 times.

CHARGING: Fits existing Strion® chargers.
Clamp style charge holder with digital control circuit that prevents overcharge.
The charger fully recharges battery in 4.5 hours and charges battery in product.
Charge base LED indication: LED Steady - Charging; LED Blinking - Charged.





FEATURES:


-  1,200 lumens with a high-power LED.
-  Mode selection switch.
- Independent head and tail switches.
- IPX7-rated design; waterproof to 1 meter.
- 2-meter impact resistance tested.
- LED charge-continuity indicator on charger base.
- Compact, snap-in charger mounts in any position.
- Serialized for positive identification.

WARRANTY: Streamlight's Limited Lifetime Warranty

APPROVALS:   Meets applicable United Kingdom and European Community Directives
 CEC Compliant

OPTIONAL ACCESSORIES: Safety wands, holster, flip lenses, Piggyback® charger, 6-unit bank charger

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		1,200 LUMENS	460 LUMENS	120 LUMENS
RUN TIME		1h 45min	5h 30min	12h
DISTANCE		335m	200m	110m
INTENSITY		28,000cd	10,000cd	3,000cd

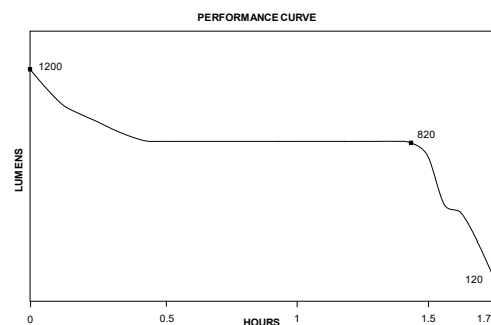

All performance claims tested to ANSI/PLATO FL1-2019 Standard

Issued: 10/16/2023

Revised: 10/17/2023 Rev: 1

Designed and engineered in the USA; Manufactured in China.

Document #399