



STREAMLIGHT®

FIRE DIVISION

**PROFESSIONAL
ILLUMINATION TOOLS**

TABLE OF CONTENTS BY PRODUCT LINE

// VULCAN AND PORTABLE SCENE LIGHT SERIES



Vulcan Clutch®
pg. 4



Fire Vulcan® LED
pg. 4



Vulcan® 180/
Vulcan® 180 HAZ-LO® pg. 5



Portable Scene Light/
Portable Scene Light EXT pgs. 6-7



Portable Scene Light II
pg. 8

// LITEBOX SERIES



E-Flood® LiteBox®/
E-Flood® FireBox® pg. 9



E-Spot® LiteBox®/
E-Spot® FireBox® pg. 9



H.I.D. LiteBox®
pg. 10

// SURVIVOR SERIES



Survivor Pivot®
pg. 13



Survivor® X
pg. 14

// HELMET LIGHTING



Vantage® 180 X
pg. 16



PolyTac 90® X
pg. 16



Vantage® II
pg. 18



Vantage®
pg. 19



PolyTac® Helmet
Lighting Kit pg. 20



4AA ProPolymer® Lux
pg. 20

// STYLUS SERIES



Stylus Pro®
pg. 21



Stylus Pro® USB
pg. 21

NEW



Nano Light® II
pg. 22



Pocket Mate® USB
pg. 22

// MISCELLANEOUS



SL-B26® Battery Pack/
Bank Charger pg. 17



SpeedLocker®
pg. 33

// STREAM SERIES

NEW



MegaStream® USB
pg. 22



MicroStream® Series
pg. 23



MacroStream® USB
pg. 23

// STINGER AND STRION SERIES



Stinger® 2020
pg. 24



Strion® 2020
pg. 24



Stinger LED HL®
pg. 24

// POLYTAC AND PROTAC SERIES



PolyTac® X
pg. 26



ProTac® 2.0
pg. 27



ProTac® HL-X
pg. 27



ProTac® 90X
pg. 27

// DUALIE SERIES



Dualie® 3AA
pg. 28



Dualie® Rechargeable
pg. 28

// WAYPOINT SERIES



Waypoint®
pg. 30



Waypoint® 400
pg. 30



Super Siege®
pg. 31



The Siege®
pg. 31

// WEDGE SERIES



Wedge®
pg. 32



Wedge® XT
pg. 32

// BEARTRAP 360



BearTrap® 360
pg. 33

// HEADLAMPS



ProTac® 2.0 Headlamp
pg. 34



Bandit® Pro
pg. 34



Enduro® Pro
pg. 35



Enduro® Pro HAZ-LO®
pg. 35

VULCAN CLUTCH®



IP67

Mutil-function lantern with adjustable head and versatile clamping handle

- 340° articulating head aims the beam where you need it and 20° downcast head for footpath lighting
- Flash mode for use as an exit marker/ warning beacon
- Three white LEDs produce extreme brightness and two ultra-bright blue taillight LEDs provide visibility in thick smoke



	HIGH	LOW
LUMENS	1,700	380
CANDELA	67,500	15,000
DISTANCE	520m	245m
RUN TIME	6.5 hrs	18 hrs

Flash runs 25 hours

Description	Item #
Vulcan Clutch - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange	44361
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes quick release shoulder strap - Orange	44365
Vulcan Clutch - Light Only - Includes quick release shoulder strap - Orange	44360
Vulcan Clutch - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow	44371
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap - Yellow	44375
Vulcan Clutch - Light Only - Includes heavy duty shoulder strap - Yellow	44370

Size and Weight	Battery
9.39" (23.85 cm); 2.84 lbs (1.288kg)	Lithium-ion



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

FIRE VULCAN® LED



IPX7

Lightweight lantern with two ultra-bright blue taillight LEDs

- Bright beam reaches long distances while still providing optimum peripheral illumination
- Two Models: Standard System with AC/DC and Vehicle Mount with 12V DC direct wire charging rack; both models include a quick release buckle strap

WHITE LED	HIGH	LOW
LUMENS	180	80
CANDELA	100,000	45,000
RUN TIME	5 hrs	10 hrs

Description	Item #
Fire Vulcan LED - Standard System - 120V/100V AC/12V DC - Includes shoulder strap and rack - Orange	44450
Fire Vulcan LED - Vehicle Mount System - 12V DC - Includes direct wire rack and shoulder strap - Orange	44451
Fire Vulcan LED - Light Only - Orange	44454

Size and Weight	Battery
7.5" (19.05 cm); 1.85 lbs (839g)	Lithium-ion



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T4

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



VULCAN® 180 HAZ-LO®



Portable lantern, developed for use in hazardous locations

- 180° tilting head for precise light direction
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Rechargeable with battery status/ charge indicator; recharges in 15 hours

	HIGH	LOW
LUMENS	400	130
CANDELA	25,000	8,000
DISTANCE	316m	179m
RUN TIME	10 hrs	24 hrs

Description	Item #
Vulcan 180 HAZ-LO - 120V/100V AC/12V DC - Orange	44331
Vulcan 180 HAZ-LO - 120V/100V AC/12V DC - Yellow	44321

Size and Weight	Battery
7.43" (18.87 cm); 2.45 lbs (1.111kg)	Lithium-ion



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, III, Div. 1, Grps. A, B, C, D, E, F, G; Class I, Zone 0, Grps. IIC, Class III; T-Code: T4

VULCAN® 180



Rechargeable, waterproof lantern built for hazardous locations

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 9 hours

	HIGH	LOW
LUMENS	1,200	350
CANDELA	75,000	22,000
DISTANCE	548m	296m
RUN TIME	5.75 hrs	16 hrs



Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III; T-Class: T4

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Description	Item #
Vulcan 180 - 120V/100V AC/12V DC - Orange	44311
Vulcan 180 - 120V/100V AC/12V DC - Yellow	44307

Size and Weight	Battery
7.43" (18.8 cm); 2.47 lbs (1.12kg)	Lithium-ion

NEW WITH UPGRADED LUMENS AND CANDELA...

PORTABLE SCENE LIGHT

IP67

Portable and collapsible flood light

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space and rugged enough to withstand rough terrain

	HIGH	MEDIUM	LOW
LUMENS	10,000	5,300	2,000
CANDELA	95,000	49,500	22,450
DISTANCE	616m	445m	300m
RUN TIME	2 hrs	4 hrs	12 hrs

10 000
LUMENS



Description

Item

Portable Scene Light - 120V AC/12V DC - Yellow

45670

Portable Scene Light EXT - 120V AC/12V DC - Yellow

45680

Size and Weight

Battery

57.2 cm; 11.3kg
EXT: 64.8 cm; 11.6kg

Zero-maintenance, sealed lead acid; Can
also be powered by 12V DC power cord





Special Features:

- Full deployment in 30 seconds
- Designed to resist 40 mph wind continuous in all directions with head fully extended
- Unlimited run time using AC/DC power source
- IP67-rated; dust-tight and WATERPROOF TO 1M FOR 30 MINUTES
- Stabilization legs provide balance on uneven surfaces

Balanced design; lead acid batteries provide ballast and stability



PORTABLE SCENE LIGHT II



Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for “light tower” capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.



	100%	80%	60%	40%	20%
LUMENS	10,000	8,300	6,300	4,500	2,300
RUN TIME	2 hrs	2.75 hrs	3.75 hrs	5.75 hrs	11 hrs



Description	Item #
Portable Scene Light II - 120V/12V DC - Red	46000

Size and Weight	Battery
16" (40.6 cm); 15.56 lbs (7.06kg)	Lithium-ion

E-FLOOD® LITEBOX® // E-FLOOD® FIREBOX®



IPX4

Lightweight lantern providing diffused area lighting

- 90° articulating head for precise beam direction
- Four LEDs with shallow reflectors for a widened beam pattern
- Recharges in 5 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	4,700	1,000
DISTANCE	137m	63m
RUN TIME	7.5 hrs	17.75 hrs



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Orange	Yellow
E-Flood LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45801	45821
E-Flood LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap	45805	45825
E-Flood LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack <small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost</small>	45807	--
E-Flood LiteBox - Light Only	45806	45826
E-Flood FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45811	---
E-Flood FireBox Vehicle Mount System - 12V DC - Includes shoulder strap	45815	---
E-Flood FireBox - Light Only	45832	---

Size and Weight	Battery
11.2" (28.4 cm); 3.1 lbs (1.389kg)	Lithium-ion



E-SPOT® LITEBOX® // E-SPOT® FIREBOX®



IPX4

Lightweight, high candela lantern with articulating head

- 90° swivel neck to aim the beam where you need it
- Four LEDs with deep parabolic reflectors for a long-range, spot beam pattern
- Recharges in 5 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	110,000	25,000
DISTANCE	663m	316m
RUN TIME	7.5 hrs	17.75 hrs



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Orange	Yellow
E-Spot LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45851	45871
E-Spot LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap	45855	45875
E-Spot LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack <small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost.</small>	45857	--
E-Spot LiteBox - Light Only	45856	45866
E-Spot FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45861	---
E-Spot FireBox Vehicle Mount System - 12V DC - Includes shoulder strap	45865	---
E-Spot FireBox - Light Only	45882	---

Size and Weight	Battery
11.2" (28.4 cm); 3.1 lbs (1.389kg)	Lithium-ion

Special Features:

- Flat side allows light to tilt and stand on its own
- Push button switch with battery status indicator
- Dual rear LEDs - FIREBOXES ONLY
- IPX4-rated; water-resistant; 1m impact resistance tested

H.I.D. LITEBOX®

One million candela, high-intensity searchlight that illuminates objects up to a mile away

- Features a 35 watt, high intensity xenon lamp and a 90° swivel head
- Hand-held lantern perfect for inspecting an entire area
- Power cord plugs into port at the rear of the light to provide indefinite run time

LUMENS	3,350
CANDELA	1,000,000
RUN TIME	1.75 hrs



Description	Orange	Black
H.I.D. LiteBox - Standard System - 120V/100V AC/12V DC - Includes 10 ft (3m) 12V DC cord, shoulder strap and flood lens	45601	45621
H.I.D. LiteBox - Vehicle Mount System - 12V DC - Includes direct wire rack, 10 ft (3m) 12V DC cord, shoulder strap and flood lens	45605	45625
H.I.D. LiteBox (Without Charger) - Includes 10 ft (3m) 12V DC cord, shoulder strap and flood lens	45600	45620

Size and Weight	Battery
14.9" (38 cm); 10.1 lbs (4.6kg)	Zero-maintenance 12V lead acid






LANTERN ACCESSORIES

DESCRIPTION	ITEM #	VULCAN 180	VULCAN 180 HAZ-LO	VULCAN CLUTCH	PORTABLE SCENE LIGHT	PORTABLE SCENE LIGHT EXT	PORTABLE SCENE LIGHT II	H.I.D.	E-FLOOD/E-SPOT LITEBOX/FIREBOX	FIRE VULCAN
H.I.D. Bulb Kit	45637							√		
Flood Lens	45657							√		
IR Filter	45654							√		
Quick Release Strap	44050	√	√	√				√	√	√
Heavy Duty Strap	45232	√		√				√	√	√
Heavy Duty Strap w/Carabiner Lock	45677				√	√				
Standard Mounting Rack - Orange	45070							√	√	
Vehicle Mounting Rack - Orange	45071							√	√	
Vehicle Mounting Rack - Yellow	45074								√	
Standard Mounting Rack - Black	45075							√		
Vehicle Mounting Rack - Black	45076							√		
Standard Charging Rack - Black	44103									√
Vehicle Mounting Rack - Black	44132									√
Standard Charging Rack - Black	44350	√	√	√						

**Images of accessories on next page

LANTERN ACCESSORIES

DESCRIPTION	ITEM #	VULCAN 180	VULCAN 180 HAZ-LO	VULCAN CLUTCH	PORTABLE SCENE LIGHT	PORTABLE SCENE LIGHT EXT	PORTABLE SCENE LIGHT II	H.I.D.	E-FLOOD/E-SPOT LITEBOX/FIREBOX	FIRE VULCAN
Direct Wire 12V DC Charge Kit - Black	44306	√		√						
12V DC (Car Socket) Charge Cord	22051	√		√				√	√	√
12V DC2 Charge Cord	22050	√		√				√	√	√
12V DC Charge Cord - 10' (3.048m)	22056				√	√	√	√		
120V AC Charge Cord	22060	√		√					√	√
120V AC Charge Cord	22085							√		
Power Supply	22083				√	√	√			
120V AC Charge Cord	22074				√	√	√			
Battery (Sealed Lead Acid)	45630				√	√		√		
Battery (Lithium-ion)	44366			√						
Battery (Lithium-ion)	45938								√	
Battery (Lithium-ion)	44610									√
Battery (Lithium-ion)	44351	√								
Battery (Lithium-ion)	44353		√							
Battery (Lithium-ion)	46005						√			



SURVIVOR PIVOT®

ARTICULATING HEAD | 325 LUMENS | SMOKE PIERCING SPOT BEAM &
DOWNCAST FLOODLIGHT | IP67 DUST-TIGHT & WATERPROOF



SURVIVOR PIVOT® // SURVIVOR PIVOT® USB



IP67

Multi-function, dual-beam flashlight with a 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	300	70	300	70	325	80
CANDELA	34,000	8,500	300	75	19,000	5,000
DISTANCE	369m	184m	35m	17m	276m	141m
RUN TIME Lithium/SL-B26	4.25 hrs	16 hrs	4.25 hrs	16 hrs	3.75 hrs	13 hrs
RUN TIME Alkaline	5.5 hrs	15 hrs	5.5 hrs	15 hrs	4.5 hrs	12 hrs




Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T3/T4

NFPA

Charging rack meets requirements
of NFPA 1900-11.1.11.2 (2024)
mounted in any position

Strong spring-loaded
clip securely grabs
onto jackets and gear;
D-ring provides forward
hanging orientation



Optional magnet



Class I, II, Div. 2,
Grps. A, B, C, D, F, G;
Class III, T-Code: T4



Description	Orange	Yellow
Survivor Pivot - 120V/100V AC/12V DC	91802	91812
Survivor Pivot - Alkaline - Includes battery carrier	91800	91810
Survivor Pivot Magnet - 120V/100V AC/12V DC	91830	91831
Survivor Pivot Magnet - Alkaline - Includes battery carrier	91825	91826

Description	Orange	Yellow
Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier	91804	91814
Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier	91838	91839

Size and Weight

7.93" (20.14 cm);
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) W/MAGNET

USB Model: 7.93" (20.14 cm)
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

Battery

Rechargeable lithium-ion
battery pack, SL-B26 or
(3) AA alkaline

CARRY MORE LIGHT WITH LESS WEIGHT SURVIVOR® X

SURVIVOR® X



Right angle, lightweight flashlight because we understand that every ounce counts

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

Description	Orange	Yellow
Survivor X - 120V/100V AC/12V DC	90952	90962
Survivor X - Alkaline	90950	90960

Note: The Survivor X is not compatible with legacy Survivor® chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g)	Rechargeable lithium-ion battery pack or (3) AA alkaline



	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME Lithium	3.75 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G;
Class III, T-Code: T3/T4

NFPA

Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

SURVIVOR® X USB



USB rechargeable, right-angle flashlight

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

NFPA

Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

Description	Orange	Yellow
Survivor X USB - Includes (1) SL-B26 battery pack	90044	90244

Note: The Survivor X is not compatible with legacy Survivor® chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // SL-B26: 11.9 oz (337g)	SL-B26 battery pack or (3) AA alkaline

	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME SL-B26	4 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		





Class I, II, Div. 2, Grps. A, B, C, D, F, G;
Class III, T-Code: T4

SURVIVOR ACCESSORIES

DESCRIPTION	ITEM #	SURVIVOR X	SURVIVOR X USB	SURVIVOR PIVOT	SURVIVOR PIVOT USB
5 Unit 120V AC Bank Charger	90910	√		√	
5 Unit 12V AC Bank Charger	90912	√		√	
120V AC Charge Cord	22060				
12V DC2 Charge Cord	22050				
12V DC2 Charge Cord	22051				
Charge Holder	90345	√		√	
Lithium-ion Battery - C1D1	90341	√		√	
Alkaline/SL-B26 Battery Carrier	90342	√	√	√	√
SL-B26 Battery Pack - 1pk	22101		√		√

**For more information on SL-B26 battery pack and bank chargers, turn to pg 17*

Notice: The Survivor X is not compatible with legacy Survivor chargers; however, the new charger WILL charge both Streamlight's Legacy Survivors as well as the new Survivor X.



VANTAGE® 180 X



Multi-fuel, right-angle flashlight

- Versatile - three lights in one - mount it to your helmet, attach it to your turn out gear or use as a handheld flashlight
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

	HIGH	LOW
LUMENS	250	100
CANDELA	7,200	2,650
DISTANCE	170m	103m
RUN TIME	5 hrs	15 hrs

Description	Item #
Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Orange	88911
Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Black	88913
Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Orange	88901
Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Black	88903

Size and Weight	Battery
5.2" (13.2 cm); SL-B26: 5.9 oz (167g) // CR123A: 5.5 oz (156g)	(1) SL-B26 battery pack or (2) CR123A lithium

NFPA

Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)



NFPA Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

CE Meets applicable European Community Directives

POLYTAC 90® X



Rugged, durable construction flashlight with a right- angled head

- TEN-TAP® Programmable
- Multi-fuel with built in battery life indicator
- Optional Gear Keeper® system for attaching the light to equipment featuring a retractable attachment system with a high-strength nylon tether with a 36" extension and 6 oz. of retraction force (see image to the right)

Description	Black	Orange	Yellow
PolyTac 90 X USB - Includes (1) SL-B26 battery pack	88835	88836	88838
PolyTac 90 X USB - Includes (1) SL-B26 battery pack and Gear Keeper - Box	---	88837	----
PolyTac 90 X - Includes (2) CR123A lithium batteries and Gear Keeper - Box	---	88837	----
PolyTac 90 X - Includes (2) CR123A lithium batteries	88830	88831	88834

Size and Weight	Battery
4.43" (11.25 cm); SL-B26: 4.8 oz (136g) // CR123A: 4.3 oz (122g)	(1) SL-B26 battery pack; or (2) CR123A lithium batteries

	HIGH	LOW
LUMENS	500	85
CANDELA	7,000	1,050
DISTANCE	167m	64m
RUN TIME CR123A	2.5 hrs	12 hrs
RUN TIME SL-B26	3.75 hrs	19 hrs



NFPA Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)


SL-B26® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

Description	Item #
SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk	22101
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk	22102
SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk	22105
Li-Ion Charge Cradle	22100
Li-Ion Battery Pack Kit - 120V AC - Includes (2) SL-B26 battery packs	22011
40" (101 cm) Micro-USB Cord for use with Charge Cradle	22070
22" (55.88 cm) Micro-USB Cord for use with Charge Cradle	22081
40" (101.6 cm) USB-C Cord	22084
22" (55.88 cm) USB-C Cord	22091

Size and Weight	Battery
2.75" (7 cm); 1.7 oz (48g) - Battery	2600mAh SL-B26 protected
4.5" (11.4 cm); 2.4 oz (68g) - Cradle	Li-Ion USB rechargeable battery pack

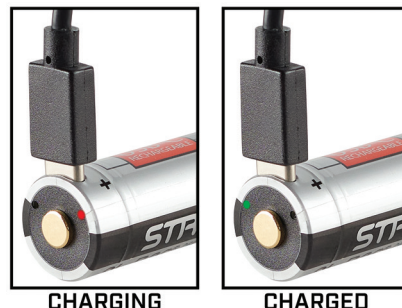

EIGHT-UNIT SL-B26® BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

Description	Item #
8-Unit Bank Charger - 12V DC - batteries not included	20220
8-Unit Bank Charger - 120V/100V AC - batteries not included	20221
8-Unit Bank Charger - 12V DC - Includes (8) SL-B26 batteries	20223
8-Unit Bank Charger - 120V/100V AC - Includes (8) SL-B26 batteries	20224

Size and Weight
10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm)
7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries



NFPA Meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in upright position



VANTAGE® II



Compact, low-profile helmet light designed to easily attach above or below brim of fire helmets

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be seen from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

	HIGH	LOW
LUMENS	350	135
CANDELA	3,500	1,700
DISTANCE	118m	80m
RUN TIME	2.25 hrs	5 hrs

Description	Item #
Vantage II - Fire - Includes (1) CR123A lithium battery - Black	69331
Vantage II - Industrial - Includes (1) CR123A lithium battery - Black	69333
Vantage II - for MSA Cairns® 1010/1044 Traditional Fire Helmets - Includes (1) CR123A lithium battery - Black	69337
Bracket Kit - Fire	69334
Bracket Kit - Industrial	69336
Bracket Kit - for MSA Cairns® 1010/1044 Traditional Fire Helmets	69339

All right reserved. Cairns® is a registered trademark of the Cairns Trademark Trust.

Size and Weight	Battery
2.37" (6.02 cm); Industrial Mount: 2.97 oz (84.2g) // Fire Mount: 3.65 oz (103.5g)	(1) CR123A lithium



NFPA

Flashlight meets 500°F requirements of NFPA 1971-B.6 (2018)

VANTAGE®

Compact, powerful, shock-proof, and virtually indestructible helmet light

- Attaches easily to helmets and hard hats, no tools necessary
- Fits both traditional and modern helmets
- Features a bright, blue taillight LED to be seen from behind even in heavy fog



IPX7

LUMENS	115
CANDELA	7,000
DISTANCE	167m
RUN TIME	6 hrs



NFPA

Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

Dual direction, easy access on/off switch



Description	Item #
Vantage - Includes (2) CR123A lithium batteries - Black	69331

Size and Weight	Battery
3.26" (8.28 cm); 5.14 oz (145.7g)	(2) CR123A lithium



POLYTAC® HELMET LIGHTING KIT

Helmet kit providing a low-profile, lightweight and economical alternative for securely mounting a flashlight to almost any style fire helmet

- Rugged housing, extreme brightness and extended run time that fits both traditional and modern style fire fighting helmets
- "No tools required" to attach your flashlight to your helmet
- TEN-TAP® Programmable

Description	Item #
Helmet Lighting Kit - Includes PolyTac, rubber helmet strap, helmet mount and lithium batteries - Yellow	88854

Size and Weight	Battery
5.34" (13.56 cm); 4.2 oz (121g)	(2) CR123A lithium



IPX7

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,500	4,900	675
DISTANCE	214m	140m	32m
RUN TIME	2.75 hrs	5.5 hrs	34 hrs

Strobe runs 5.5 hours



NFPA

Meets requirements of
NFPA 1971-8.6 (2013)



Rubber helmet strap is an easy "no tools required" method to attach your flashlight to your helmet

4AA PROPOLYMER® LUX

Durable polymer flashlight with a long-reaching beam

- Ergonomically shaped for maximum hand support
- Unbreakable, scratch-resistant lens

Description	Item #
4AA ProPolymer Lux Div. 2 - Includes (4) AA batteries - Yellow	68244
4AA ProPolymer Lux Div. 2 - Includes (4) AA batteries - Black	68344
4AA ProPolymer Lux Div. 1 - Includes (4) AA batteries - Yellow	68602
4AA ProPolymer Lux Div. 1 - Includes (4) AA batteries - Black	68702

Size and Weight	Battery
7" (17.78 cm); 7.6 oz (178.6g)	(4) AA alkaline



IP67

LUMENS	67
CANDELA	12,000
LUMENS	219m
RUN TIME	6 hrs



4AA Lux Div. 2



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T3C (142 C)

4AA Lux Div. 1



Class I, Div. 1, Grps. C, D;
Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 1, Grps. F, G;
Class III, Exia; T4

HELMET LIGHTING ACCESSORIES

DESCRIPTION	ITEM #	POLYTAC	4AA PROPOLYMER LUX
Helmet Mount	68085	✓	✓
Rubber Helmet Band	99075	✓	✓
CR123A Lithium Battery - 2pk	85175	✓	
CR123A Lithium Battery - 6pk	85180	✓	
CR123A Lithium Battery - 12pk	85177	✓	
CR123A Lithium Battery - 400pk	85179	✓	



STYLUS PRO®



IPX4

High performance penlight

- Fits easily in your pocket
- Low battery indicator - strobes when new batteries are needed
- Abrasion and corrosion-resistant anodized aircraft aluminum construction with unbreakable, scratch resistant polycarbonate lens

LUMENS	100
CANDELA	950
DISTANCE	62m
RUN TIME	8 hrs



Description	Item #
Stylus Pro - Includes (2) AAA alkaline batteries - Black	66118
Stylus Pro - Includes (2) AAA alkaline batteries - Red	66120
Nylon Holster	66028

Size and Weight	Battery
5.3" (13.4 cm); 1.64 oz (46.9g)	(2) AAA alkaline batteries

STYLUS PRO® USB



IPX4

Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode

WHITE LED	HIGH	LOW
LUMENS	350	90
CANDELA	2,950	840
DISTANCE	109m	58m
RUN TIME	1.5 hrs	3.5 hrs



Description	Item #
Stylus Pro USB - 120V AC with holster - Black	66133
Nylon Holster	66029

Size and Weight	Battery
5.95" (15.1 cm); 1.8 oz (51g)	Lithium-ion



Please note, the flashlight in this photo is not a Stylus Pro, it is a Survivor Pivot.

NEW**NANO LIGHT® II**

Ultra-compact keychain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery



Description	Item #
Nano Light II - Includes (1) AAAA alkaline battery - Black	73020

Size and Weight	Battery
2.2" (5.7 cm); 0.6 oz (18g)	(1) AAAA alkaline

LUMENS	20
CANDELA	120
DISTANCE	22m
RUN TIME	1 hr

POCKET MATE®

Small but powerful rechargeable hands-free light

- Ultra-compact design makes it easy to always carry it with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

Description	Item #
Pocket Mate - Includes Micro-USB cord - Box - Silver	73300
Pocket Mate - Includes Micro-USB cord - Box - Red	73301

Size and Weight	Battery
2" (5.1 cm); 0.5 oz (14.2g)	Lithium Polymer

	HIGH	LOW
LUMENS	325	45
CANDELA	1,450	200
DISTANCE	76m	28m
RUN TIME	20 min	1 hr

**NEW****MEGASTREAM® USB**

Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- The hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Sliding sleeve protects the USB port; recharges in 5 hours

Description	Item #
MegaStream USB - Includes USB-C cord, lanyard and SL-B34 battery pack - Black	66210

Size and Weight	Battery
5.3" (13.4 cm); 5.4 oz (152g)	(1) SL-B34 battery pack

	HIGH	MEDIUM	LOW
LUMENS	1,800	500	150
CANDELA	26,000	7,200	2,100
DISTANCE	322m	170m	92m
RUN TIME	2 hrs	3.5 hrs	13 hrs



MICROSTREAM® USB



Rechargeable pocket light

- Clip it to your pocket or hat for hands-free use
- USB rechargeable - metal sleeve protects charge port; slide sleeve forward to reveal charge port

	HIGH	LOW
LUMENS	250	50
CANDELA	1,150	250
DISTANCE	68m	31m
RUN TIME	1.5 hrs	3.5 hrs



Description	Item #
MicroStream USB - Includes USB cord and lanyard - Box - Black	66604
MicroStream USB - Includes USB cord and lanyard - Box - Coyote	66609
Size and Weight	Battery
3.87" (9.83 cm); 1.2 oz (34.1g)	Lithium-ion

MACROSTREAM® USB



High-power, rechargeable flashlight

- Durable aluminium construction
- Pocket clip attaches to visor
- Lithium-ion battery charges in 4 hours



	HIGH	LOW
LUMENS	500	50
CANDELA	2,000	220
DISTANCE	90m	30m
RUN TIME	2 hrs	8 hrs

Description	Item #
MacroStream USB - Includes USB cord and lanyard - Clam - Black	66320
Size and Weight	Battery
4.5" (11.43 cm); 2.2 oz (62.4g)	Lithium-ion

MICROSTREAM®



Ultra-compact personal light

- Clip it to your hat or pocket
- Alkaline battery powered

LUMENS	45
CANDELA	420
DISTANCE	41m
RUN TIME	2.25 hrs



Description	Item #
MicroStream - Includes (1) AAA alkaline battery - Clam - Black	66318
MicroStream - Includes (1) AAA alkaline battery - Clam - Red	66323
Size and Weight	Battery
3.6" (9.14 cm); 1.1 oz (31.2g)	(1) AAA alkaline battery

ACCESSORIES

DESCRIPTION	ITEM #	MACROSTREAM USB	MICROSTREAM USB	MEGASTREAM USB
Lithium-ion Battery	66321	✓		
Lithium-ion Battery	66607		✓	
Lithium-ion Battery	22131			✓
22" USB-C Cord	22084			✓
Lanyard	72024	✓	✓	



STINGER® 2020



Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch for ease of use
- Multiple charging options
- Anti-roll design

	HIGH	MEDIUM	LOW
LUMENS	2,000	850	100
CANDELA	25,000	10,000	1,200
DISTANCE	315m	200m	70m
RUN TIME	2 hrs	4 hrs	24 hrs

Strobe runs 3.25 hours



Mode switch for easy selection of High, Medium or Low



Description	Item #
Stinger 2020 - 120V AC/12V DC - Black	78101

Size and Weight	Battery
7.67" (19.48 cm); 12.3 oz (350g)	(2) SL-B26 battery packs

STRION® 2020



Compact, high-lumen flashlight

- Intuitive mode selector switch for ease of use
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available



	HIGH	MEDIUM	LOW
LUMENS	1,200	460	120
CANDELA	28,000	10,000	3,000
DISTANCE	335m	200m	110m
RUN TIME	1.75 hrs	5.5 hrs	12 hrs

Strobe runs 3.5 hours



Description	Item #
Strion 2020 - 120V AC/12V DC - 1 Holder - Black	74431
Strion 2020 - 120V AC/12V DC PiggyBack - Black	74435

Size and Weight	Battery
6.33" (16.1 cm); 5.7 oz (161.1g)	Lithium-ion

STINGER LED HL®



High-lumen flashlight provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes
- Recharges in 4.5 hours

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	24,000	12,000	6,000
DISTANCE	310m	219m	155m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours



Description	Item #
Stinger LED HL - 120V AC/12V DC - 2 Holders - Black	75430

Size and Weight	Battery
8.41" (21.36 cm); 12.4 oz (352g)	NiMH

STINGER / STRION ACCESSORIES

DESCRIPTION	ITEM #	STINGER 2020	STINGER LED HL	STRION 2020
5 Unit Bank Charger - 120V	74100	✓	✓	
6 Unit Bank Charger - 120V	74400			✓
Smart Charger	75105	✓	✓	
Charger	74102			✓
PiggyBack® Charger - Includes NiMH battery	75277		✓	
PiggyBack® Charger - batteries sold separately	74115			✓
SL-B26 Battery Pack	78105	✓		
Lithium-ion Battery	75176		✓	
Lithium-ion Battery	74436			✓
NiMH Battery Stick	75375		✓	
12V DC1 Charge Cord	22051	✓	✓	✓
12V DC2 Charge Cord	22050	✓	✓	✓
"Y" USB Cord	22082	✓		
120V AC Charge Cord	22071	✓	✓	✓
Leather Plain Holster	75133		✓	
Leather Plain Holster	74059			✓
Nylon Holster	78107	✓		
Leather Weave Holster	78114	✓		
Leather Weave Holster	75134		✓	
Leather Weave Holster	74060			✓
Nylon Holster	75927		✓	
Loop Nylon Holster	75928		✓	
Duty Holster	88053		✓	
Duty Holster	88051			✓
Ring Holder	75906		✓	



74100




74400



75105, 74102



75277



74115



78105



75176



74436



75375



22051, 22050



22082



22071



75133, 74059



78107



78114, 75134,
75143



75927



75928



88053, 88051



75906



POLYTAC® X



Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,485	4,930	675
DISTANCE	205m	135m	50m
RUN TIME CR123A	2.75 hrs	5.5 hrs	34 hrs
RUN TIME SL-B26	3.5 hrs	5.75 hrs	36 hrs

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)

Description	Black	Yellow
PolyTac X - Includes (2) CR123A lithium batteries and holster	88603	88604
PolyTac X USB - Includes (1) SL-B26 battery pack, USB cord and holster	88613	88614

Size and Weight	Battery
5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	SL-B26 battery pack; or (2) CR123A lithium batteries

NFPA
Flashlight meets 500°F requirements
of NFPA 1971-B.6 (2018)



PROTAC® 2.0



IP67

High-performance flashlight that produces 2,000 lumens without sacrificing run

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

Description	Item #
ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89000

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

	HIGH	MEDIUM	LOW
LUMENS	2,000	570	100
CANDELA	17,300	5,000	890
DISTANCE	262m	142m	60m
RUN TIME	2.5 hrs	4.5 hrs	25 hrs

Strobe runs 4 hours 25 minutes



PROTAC® HL-X



IP68

Multi-fuel flashlight produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

	HIGH	MEDIUM	LOW
LUMENS	1,000	380	65
CANDELA	12,000	4,420	700
DISTANCE	219m	133m	52m
RUN TIME	1.5 hrs	3.5 hrs	23 hrs

Strobe runs 1.5 hours



Description	Item #
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black	88065
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	88085

Size and Weight	Battery
5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g)	(1) SL-B26 battery pack or (2) CR123A lithium

PROTAC® 90X



IPX7

Multi-fuel, everyday carry flashlight with a twist

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

	HIGH	MEDIUM	LOW
LUMENS	1,000	300	65
CANDELA	7,350	2,060	450
DISTANCE	171m	91m	42m
RUN TIME CR123A	2.5 hrs	4 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	4.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)



Description	Item #
ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black	88094
ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black	88095

Size and Weight	Battery
4.39" (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	SL-B26 battery pack; or (2) CR123A lithium

DUALIE® 3AA



IP67

Features two LEDs and three lighting modes: spot, flood, spot and flood combo

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Magnetic model includes clip with integrated hang hook for hands-free use

Description	Item #
Dualie 3AA - batteries not included - Yellow	68751
Dualie 3AA - batteries not included - Black	68753
Dualie 3AA - Includes (3) AA alkaline batteries - Yellow	68750
Dualie 3AA - Includes (3) AA alkaline batteries - Black	68752
Dualie 3AA Magnet - batteries not included - Yellow	68780
Dualie 3AA Magnet - batteries not included - Black	68781
Dualie 3AA Magnet - Includes (3) AA alkaline batteries - Yellow	68782
Dualie 3AA Magnet - Includes (3) AA alkaline batteries - Black	68783

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g)	(3) AA alkaline
7.5" (19.05 cm); 7.1 oz (201g) with Magnetic Clip	

	SPOT	FLOOD	COMBO
LUMENS	140	140	245
CANDELA	7,300	80	---
DISTANCE	171m	8m	---
RUN TIME	18 hrs	18 hrs	9 hrs



Class I, II, Div. I, Grps. A, B, C, D, E, F, G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia



DUALIE® RECHARGEABLE



IP67

Rechargeable, multi-function flashlight

- Mount virtually anywhere with charge holder
- Rechargeable dual beam flashlight; recharges in 8 hours

Description	Item #
Dualie Rechargeable - 120V/100V AC - Yellow	68732
Dualie Rechargeable - 120V/100V AC - Black	68733
Dualie Rechargeable - Magnet - 120V/100V AC - Yellow	68793
Dualie Rechargeable - Magnet - 120V/100V AC - Black	68794
Dualie Rechargeable - 12V DC - Yellow	68734
Dualie Rechargeable - 12V DC - Black	68735
Dualie Rechargeable - Magnet - 12V DC - Yellow	68795
Dualie Rechargeable - Magnet - 12V DC - Black	68796
Dualie Rechargeable - Light Only - Yellow	68730
Dualie Rechargeable - Light Only - Black	68731
Dualie Rechargeable - Magnet - Light Only - Yellow	68785
Dualie Rechargeable - Magnet - Light Only - Black	68786

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g) // with Magnet 7.5" (19.05 cm); 7.09 oz (201g)	Lithium-ion

	SPOT	FLOOD	COMBO
LUMENS	180	105	275
CANDELA	11,500	60	--
DISTANCE	171m	18m	--
RUN TIME	7.25 hrs	13.5 hrs	5.5 hrs



Magnetic clip with integrated hang hook for hands-free use



Class I, II, Div. I, Grps. A, B, C, D, E, F, G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia





DUALIE ACCESSORIES

DESCRIPTION	ITEM #	DUALIE 3AA	DUALIE RECHARGEABLE
6 Unit Bank Charger	68789		√
Poly Mount Kit	68089	√	√
Rubber Helmet Band	99075	√	√
120V AC USB Cord	22071		√
22" (55.88 cm) USB Cord	22081		√
Helmet Mount	68085	√	√
Charger	68790		√





WAYPOINT® 400



Rechargeable, high candela flashlight that illuminates out of reach places

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours



Description	Item #
Waypoint 400 - 120V AC - Box - Yellow	44910
Waypoint 400 - 120V AC - Box - Black	44911
Size and Weight	Battery
6.75" (17.14 cm); 1.52 lbs (691g)	Lithium-ion

	HIGH	MEDIUM	LOW
LUMENS	1,400	600	38
CANDELA	400,000	165,000	10,000
DISTANCE	1,265m	812m	200m
RUN TIME	3.25 hrs	7.5 hrs	84 hrs

WAYPOINT®



High-performance pistol-grip spotlight for down-range illumination

- Alkaline battery powered
- Integrated stand for hands-free lighting
- 12V DC power cord for unlimited run time

Description	Item #
Waypoint - Includes 12V DC power cord - Box - Yellow	44900
Waypoint - Includes 12V DC power cord - Box - Black	44902
Waypoint - Includes 12V DC power cord - Clam - Yellow	44904
Waypoint - Includes 12V DC power cord - Clam - Black	44905

*12V DC power cord does not charge batteries

Size and Weight	Battery
6.75" (17.14 cm); 1.8 lbs (816g)	(4) C batteries (not included)

	HIGH	LOW
LUMENS	550	40
CANDELA	100,000	7,900
DISTANCE	625m	178m
RUN TIME	10 hrs	82 hrs

12V DC Power Cord - Unlimited run time
Emergency Signal - Runs 82 hours



WAYPOINT ACCESSORIES

DESCRIPTION	ITEM #	WAYPOINT 400	WAYPOINT
Polymer Storage Mount	99918	✓	
Polymer Storage Mount	99908		✓
120V AC Charge Cord	44909	✓	
12V AC Power Cord	44923	✓	
12V AC Power Cord	44903		✓



SUPER SIEGE®



IPX7

Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on; recessed to avoid unintentional activation
- Rechargeable; auxiliary USB charger charges portable devices
- Glare Guard™ will shield light from behind for up-close task lighting



Description	Item #
Super Siege - 120V AC- Yellow	44945
Super Siege - 120V AC - Coyote	44947
Size and Weight	Battery
3.8" (19.05 cm); 1 lb 14 oz (867g)	Lithium-ion

WHITE	HIGH	MEDIUM	LOW
LUMENS	1,100	550	125
RUN TIME	5.75 hrs	11.5 hrs	36.25 hrs
RED	HIGH	SOS	LOW
LUMENS	2.7	2.7	1
RUN TIME	140 hrs	320 hrs	348 hrs

THE SIEGE®



IPX7

Compact, alkaline battery powered hand lantern

- Runs over 30 hours on high and over 12 days on low
- Battery indicator that flashes when battery is low
- Three white light settings, a red light for softer light and an SOS mode



Description	Item #
The Siege - Coyote	44931
Size and Weight	Battery
7.25" (18.42 cm); 1 lb 15 oz (878.83g)	(3) D Batteries

WHITE	HIGH	MEDIUM	LOW
LUMENS	540	275	55
RUN TIME	30 hrs	70 hrs	295 hrs
RED	HIGH	SOS	
LUMENS	10	10	
RUN TIME	235 hrs	430 hrs	

SIEGE ACCESSORIES

DESCRIPTION	ITEM #	SUPER SIEGE	THE SIEGE
Glare Guard™	44950	√	√
Magnetic Accessory Base - Black	44951	√	
Magnetic Accessory Base - Black	44952		√
120V AC Charge Cord	44909	√	



WEDGE®



Everyday carry flashlight available in multiple colors, making it easier to find in your toolbox

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip

	THRO	CONSTANT-ON
LUMENS	1,000	300
CANDELA	3,000	1,200
DISTANCE	110m	69m
RUN TIME	35 sec	3 hrs

NEW



**1000
LUMENS**

Description	Item #
Wedge - Includes USB-C cord, lanyard - Box - Black	88810
Wedge - Includes USB-C cord, lanyard - Box - Coyote	88811
Wedge - Includes USB-C cord, lanyard - Box - Red	88814
Wedge - Includes USB-C cord, lanyard - Box - Blue	88817
Wedge - Includes USB-C cord, lanyard - Box - Purple	88818
Wedge - Includes USB-C cord, lanyard - Box - Orange	88820
Wedge - Includes USB-C cord, lanyard - Box - Lime Green	88821

Size and Weight	Battery
5.46" (13.87 cm); 3.3 oz (93.5g)	Lithium Polymer



Battery charge indicator located in the on/off switch
Charge indication:

Red – Charging // Green – Charged
Recharges in 5 hours

WEDGE® XT



Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	500	50
CANDELA	1,900	200
DISTANCE	87m	28m
RUN TIME	2 hrs	11 hrs

Description	Item #
Wedge XT - Includes USB-C cord, lanyard - Black	88812
Wedge XT - Includes USB-C cord, lanyard - Coyote	88813
Wedge XT - Includes USB-C cord, lanyard - Silver	88819

Size and Weight	Battery
4.25" (10.8 cm); 2.62 oz (74.3g)	Lithium Polymer



Charge indication LED:

Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours





BEARTRAP® 360



IPX4

Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it, hang it or use its magnetic base
- Will continue to charge while plugged in and in use



	SPOT			FLOOD		
	HIGH	MEDIUM	LOW	HIGH	MEDIUM	LOW
LUMENS	1,000	450	325	2,000	1,000	575
CANDELA	7,500	3,600	2,500	1,200	680	360
DISTANCE	174m	120m	100m	69m	52m	38m
RUN TIME	4.5 hrs	8.75 hrs	12.5 hrs	2.5 hrs	5 hrs	8.75 hrs

Description	Item #
BearTrap 360 - 120V/100V AC - Red	61523
Size and Weight	Battery
7.62" (19.35 cm); 2 lbs 5 oz (1049g)	Lithium-ion



SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various firearms but is not an approved gun case

Description	Item #
SpeedLocker - Includes padlock and Allen Key - Black	59000
Padlock with (3) keys	59001
3 ft (91.44 cm) Security Cable	59002

Size and Weight
External: 12.4 x 8.2 x 2.78 in (31.5 x 20.8 x 7.1 cm)
Internal: 8 x 7.1 in (20.3 x 18 cm)
2.6 lbs (1.2kg)



The SpeedLocker® is not an approved firearm safe. It is the user responsibility to determine the suitability to the specific situation and need.

PROTAC® 2.0 HEADLAMP



IP64

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable



	HIGH	MEDIUM	LOW
LUMENS	2,000	650	110
CANDELA	14,500	4,200	750
DISTANCE	241m	130m	55m
RUN TIME	2.25 hrs	4.5 hrs	25 hrs

Description	Item #
ProTac 2.0 Headlamp - Includes SL-B50 battery pack, USB-C cord, elastic and rubber straps - Black	89001

Size and Weight	Battery
4.92" (12.5 cm); 10.48 oz (297.1g)	SL-B50 battery pack

BANDIT® PRO



IPX4



Lightweight, long lasting headlamp

- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks

	HIGH	LOW
LUMENS	180	35
RUN TIME	4.5 hrs	21 hrs
Emergency flash - 180 lumens		



Two hard hat mounting options:
Rubber strap 3M® Dual Lock® for strapless mounting



Description	Item #
Bandit Pro - Includes USB cord, rubber hard hat strap and 3M® Dual Lock® Fasteners - Yellow	61716
Hard hat clips for 1" straps	61437



Size and Weight	Battery
2.7" (6.86 cm); 1.6 oz (45.4g)	Rechargeable lithium polymer

ENDURO® PRO




Compact, multi-purpose headlamp

- Spot and flood modes - each with high, medium and low
- Multi-function switch remembers the last mode used
- Two hard hat mounting options

Spot	HIGH	MEDIUM	LOW
LUMENS	200	75	25
CANDELA	2,250	825	300
DISTANCE	95m	57m	35m
RUN TIME	6 hrs	14 hrs	38 hrs

Flood	HIGH	MEDIUM	LOW
LUMENS	135	45	15
CANDELA	210	80	20
DISTANCE	29m	18m	9m
RUN TIME	6 hrs	14 hrs	38 hrs



Description	Item #
Enduro Pro - Includes (3) AAA alkaline batteries, rubber hard hat strap and 3M® Dual Lock® - Box - Yellow	61422
Hard hat clips for 1" straps 	61437
Size and Weight	Battery
2.19" (5.56 cm); Alkaline: 3.4 oz (96.38g) // Lithium: 3.0 oz (85.04g)	(3) AAA alkaline

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



ENDURO® PRO HAZ-LO®



Intrinsically safe with spot and flood modes

- Class 1, Div. 1 safety ratings
- Multi-function switch remembers the last mode used
- 45° tilting head



Class I, Div. 1,
Grps. A, B, C, D, E, F, G
Class III, Class I, Zone 0,
Group IIC Exia; T4



Permissible Flashlight.
Approval No. 20-A190001-0.
Tested for Intrinsic Safety in
Methane-Air mixtures only.

	SPOT	FLOOD	COMBO
LUMENS	160	160	235
CANDELA	1,350	100	--
DISTANCE	73m	20m	--
RUN TIME	5 hrs	5 hrs	4.75 hrs

Description	Item #
Enduro Pro HAZ-LO - Includes (3) AAA alkaline batteries, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61424
Size and Weight	Battery
2.19" (5.68 cm); 3.5 oz (99.2g)	(3) AAA alkaline



Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting





STREAMLIGHT
BRILLIANT THINKING

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A. 19403-3996

streamlight.com // streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

DISTRIBUTED BY: