



**STREAMLIGHT®**

**FIRE DIVISION**

**PROFESSIONAL  
ILLUMINATION TOOLS**

# TABLE OF CONTENTS

## BY PRODUCT LINE

### // PORTABLE SCENE LIGHT SERIES



Portable Scene Light/  
Portable Scene Light EXT pg. 4



Portable Scene Light II  
pg. 5

**NEW**

Portable Scene Light III  
pg. 6



### // LITEBOX® SERIES



E-Flood® LiteBox®/  
E-Flood® FireBox® pg. 7



E-Spot® LiteBox®/  
E-Spot® FireBox® pg. 7

**NEW**



LiteBox® 1Million®  
pg. 8

### // VULCAN® SERIES



Vulcan Clutch®  
pg. 10



Fire Vulcan® LED  
pg. 10



Vulcan® 180 Series  
pg. 9



### // HELMET LIGHTING



Vantage® 180 X  
pg. 16



PolyTac 90® X  
pg. 18



Vantage® II  
pg. 17

**UPGRADED**



Vantage®  
pg. 17

### // SURVIVOR® SERIES



Survivor® X  
pg. 12



Survivor Pivot®  
pg. 13

// POLYTAC® AND PROTAC® SERIES

**NEW**



PolyTac® X  
pg. 18



PolyTac® 1X  
pg. 19



ProTac® 2.0  
pg. 20



ProTac® HL-X  
pg. 20



ProTac® 90X  
pg. 20



Stinger® 2020  
pg. 24



Strion® 2020  
pg. 24



Stinger LED HL®  
pg. 24

// STREAM™ SERIES



MegaStream® USB  
pg. 22



MicroStream® Series  
pg. 23



MacroStream® USB  
pg. 23



Dualie® 3AA  
pg. 26



Dualie® Rechargeable  
pg. 26



4AA ProPolymer® Lux  
pg. 27

// DUALIE® SERIES

// WAYPOINT® SERIES



Waypoint® 400  
pg. 28



Waypoint®  
pg. 28



Super Siege®  
pg. 29



The Siege®  
pg. 29



Wedge®  
pg. 30



Wedge® XT  
pg. 30



Wedge® SL  
pg. 31

// SIEGE® SERIES

// WEDGE® SERIES

// HEADLAMPS

**NEW**



ProTac® 2.0 Headlamp  
pg. 32



Sledge®  
pg. 32



Enduro® Pro  
pg. 33



Enduro® Pro HAZ-LO®  
pg. 33

**NEW**



SL-SideSaddle® Series  
pg. 34

// STYLUS® SERIES

// KEYCHAIN LIGHTS

// MISCELLANEOUS



Stylus Pro®  
pg. 35



Stylus Pro® USB  
pg. 35



Nano Light® II  
pg. 35



Pocket Mate® USB  
pg. 35



SL-B26® Battery Pack/  
Bank Charger pg. 15

# PORTABLE SCENE LIGHT



Portable and collapsible flood light

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space and rugged enough to withstand rough terrain

|          | HIGH   | MEDIUM | LOW    |
|----------|--------|--------|--------|
| LUMENS   | 10,000 | 5,300  | 2,000  |
| CANDELA  | 95,000 | 49,500 | 22,450 |
| DISTANCE | 616m   | 445m   | 300m   |
| RUN TIME | 2 hrs  | 4 hrs  | 12 hrs |



| Description  | Item # |
|--|--------|
| Portable Scene Light - 120V AC/12V DC - Yellow     | 45670  |
| Portable Scene Light EXT - 120V AC/12V DC - Yellow | 45680  |

| Size and Weight   | Battery  |
|---|--|
| 22.5" (57.2 cm); 25.8 lbs (11.7kg)<br>EXT: 25.5" (64.8 cm); 26.3 lbs (11.9kg) | Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord |



Extends to full height with the stabilization legs fully deployed and locked in less than 30 seconds

Portable Scene Light EXT: pole extends to 84" (213.36 cm)

Portable Scene Light: pole extends to 72" (182.88 cm)

Balanced design; lead acid batteries provide ballast and stability





## PORTABLE SCENE LIGHT II



Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for “light tower” capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.

|          | 100%   | 80%      | 60%      | 40%      | 20%    |
|----------|--------|----------|----------|----------|--------|
| LUMENS   | 10,000 | 8,300    | 6,300    | 4,500    | 2,300  |
| RUN TIME | 2 hrs  | 2.75 hrs | 3.75 hrs | 5.75 hrs | 11 hrs |



| Description                                 | Item #      |
|---|-------------|
| Portable Scene Light II - 120V/12V DC - Red | 46000       |
| Size and Weight                             | Battery     |
| 16" (40.6 cm); 15.56 lbs (7.06kg)           | Lithium-ion |

**NEW**

# PORTABLE SCENE LIGHT III

ALL-WEATHER PERFORMANCE  
ROCK-SOLID STABILITY  
10,000 LUMENS  
EXTENDS TO OVER 7 FEET



## PORTABLE SCENE LIGHT III

  
**IPX7**

Rugged, all-weather scene light delivering powerful, high-lumen, 360° adjustable 12-LED illumination for complete scene coverage

- IPX7-rated with swappable battery installed for reliable performance in wet conditions
- Wireless remote control (up to 75 feet) with multi-light pairing for seamless operation
- Modular design with swappable battery packs, multiple power options, and 7.7 foot heavy-duty tripod for versatile indoor and outdoor use

|          | HIGH    | MEDIUM | LOW    |
|----------|---------|--------|--------|
| LUMENS   | 10,000  | 5,000  | 2,500  |
| CANDELA  | 121,000 | 61,000 | 38,000 |
| DISTANCE | 696m    | 494m   | 390m   |
| RUN TIME | 2 hrs   | 4 hrs  | 8 hrs  |

### Description

### Item #

Portable Scene Light III - Light Head Only - 120V AC/12V DC - Includes (1) SL-P6™ battery, (1) SL-P6 battery charger, (1) 120V AC cord/power supply and (1) 12V DC cord - Black

46100

Portable Scene Light III - Tripod System - Includes tripod, (2) SL-P6™ batteries, (1) wireless remote, (1) SL-P6 battery charger, (2) 120V AC cord/power supplies and (1) 12V DC cord - Black

46105

### Size

### Weight

### Battery

Head: 7.5" (19.1 cm);  
Tripod Collapsed: 37.7" (95.8 cm)  
Tripod Extended: 92" (233.7 cm)

Head: 7.5 lbs (3.4kg)  
Tripod: 13.3 lbs (6kg)  
Total: 23.5 lbs (10.7kg)

(1) SL-P6™  
lithium-ion  
battery pack



# E-FLOOD® LITEBOX® // E-FLOOD® FIREBOX®



Lightweight lantern providing diffused area lighting

- 90° articulating head for precise beam direction
- Four LEDs with shallow reflectors for a widened beam pattern
- Recharges in 5 hours

|          | HIGH    | LOW    |
|----------|---------|--------|
| LUMENS   | 1,500   | 350    |
| CANDELA  | 4,700   | 1,000  |
| DISTANCE | 137m    | 63m    |
| RUN TIME | 8.5 hrs | 20 hrs |



**NFPA** Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

| Description  | Orange | Yellow |
|--|--------|--------|
| E-Flood LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack   | 45801  | 45821  |
| E-Flood LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap  | 45805  | 45825  |
| E-Flood LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack<br><small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost</small> | 45807  | --     |
| E-Flood LiteBox - Light Only   | 45806  | 45826  |
| E-Flood FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack   | 45811  | ---    |
| E-Flood FireBox Vehicle Mount System - 12V DC - Includes shoulder strap  | 45815  | ---    |
| E-Flood FireBox - Light Only   | 45832  | ---    |

| Size and Weight                    | Battery     |
|------------------------------------|-------------|
| 11.2" (28.4 cm); 3.1 lbs (1.389kg) | Lithium-ion |

**Special Features:**

- Flat side allows light to tilt and stand on its own
- Push button switch with battery status indicator
- Dual rear LEDs - FIREBOXES ONLY

# E-SPOT® LITEBOX® // E-SPOT® FIREBOX®



Lightweight, high candela lantern with articulating head

- 90° swivel neck to aim the beam where you need it
- Four LEDs with deep parabolic reflectors for a long-range, spot beam pattern
- Recharges in 5 hours

|          | HIGH    | LOW    |
|----------|---------|--------|
| LUMENS   | 1,500   | 350    |
| CANDELA  | 110,000 | 25,000 |
| DISTANCE | 663m    | 316m   |
| RUN TIME | 8.5 hrs | 20 hrs |



**NFPA** Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

| Description  | Orange | Yellow |
|--|--------|--------|
| E-Spot LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack  | 45851  | 45871  |
| E-Spot LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap   | 45855  | 45875  |
| E-Spot LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack<br><small>Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost.</small> | 45857  | --     |
| E-Spot LiteBox - Light Only  | 45856  | 45876  |
| E-Spot FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack  | 45861  | ---    |
| E-Spot FireBox Vehicle Mount System - 12V DC - Includes shoulder strap   | 45865  | ---    |
| E-Spot FireBox - Light Only  | 45882  | 45883  |

| Size and Weight                    | Battery     |
|------------------------------------|-------------|
| 11.2" (28.4 cm); 3.1 lbs (1.389kg) | Lithium-ion |

**NEW**

**LITEBOX® 1MILLION®**



**IPX4**

Rugged, rechargeable high-intensity searchlight delivering 1.25 million candela and a 1.39-mile beam to support fireground operations, search and rescue, storm response, and long-range scene illumination

- Articulating head pivots 135° and rotates 270°
- Intuitive integrated battery status indicator
- IPX4 water resistant design
- Fits existing Streamlight LiteBox chargers


|          | HIGH      | LOW      |
|----------|-----------|----------|
| LUMENS   | 3,300     | 525      |
| CANDELA  | 1,250,000 | 200,000  |
| DISTANCE | 2,236m    | 894m     |
| RUN TIME | 4.5 hrs   | 22.5 hrs |

| Description  | Item # |
|--|--------|
| LiteBox 1Million - Standard System - 120V/100V AC/12V DC - Includes heavy duty shoulder strap and mounting rack - Orange | 46201  |
| LiteBox 1Million - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap and mounting rack - Orange         | 46203  |
| LiteBox 1Million - Light Only - Includes heavy duty shoulder strap - Orange  | 46200  |

| Size and Weight                  | Battery     |
|----------------------------------|-------------|
| 12.5" (31.75 cm); 7 lbs (3.18kg) | Lithium-ion |



**NFPA** Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

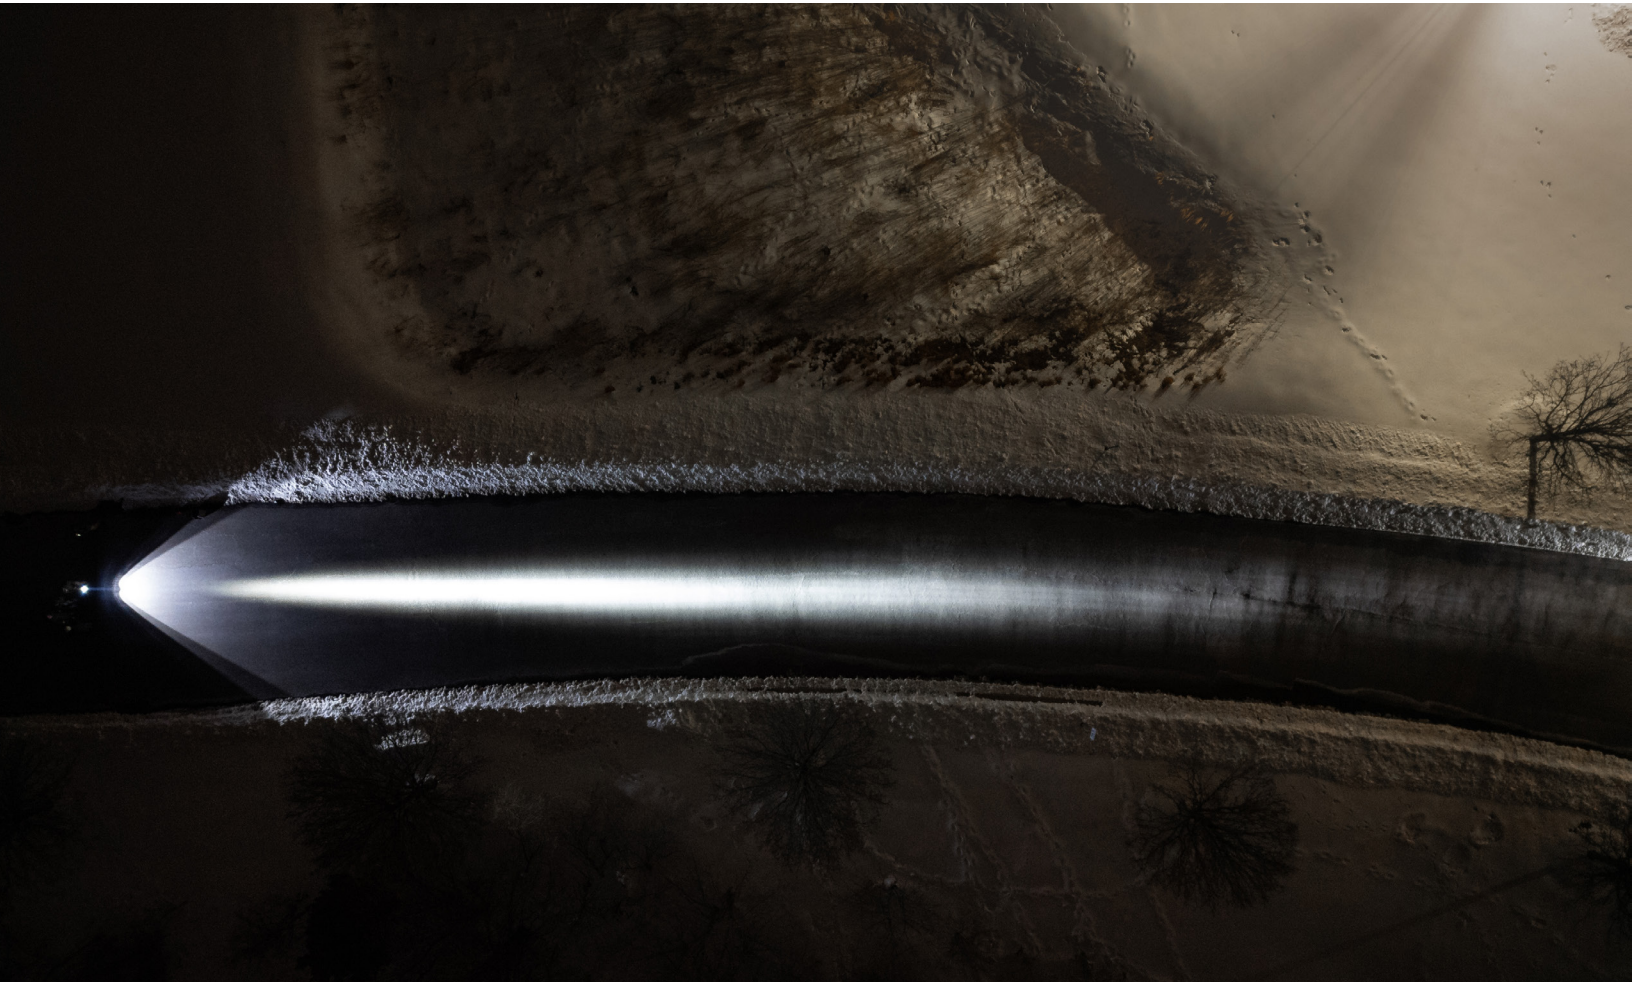

# VULCAN® 180 HAZ-LO®



Portable lantern, developed for use in hazardous locations

- 180° tilting head for precise light direction
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Rechargeable with battery status/ charge indicator; recharges in 16 hours

|          | HIGH   | LOW    |
|----------|--------|--------|
| LUMENS   | 450    | 130    |
| CANDELA  | 25,000 | 8,000  |
| DISTANCE | 316m   | 179m   |
| RUN TIME | 14 hrs | 30 hrs |



| Description  | Item #      |
|--|-------------|
| Vulcan 180 HAZ-LO - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange | 44331       |
| Vulcan 180 HAZ-LO - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow    | 44321       |
| Size and Weight  | Battery     |
| 7.43" (18.87 cm); 2.45 lbs (1.111kg)   | Lithium-ion |



### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, III, Div. 1, Grps. A, B, C, D, E, F, G; Class I, Zone 0, Grps. IIC, Class III; T-Code: T4

# VULCAN® 180



Rechargeable, waterproof lantern built for hazardous locations

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 11 hours

|          | HIGH     | LOW    |
|----------|----------|--------|
| LUMENS   | 1,200    | 350    |
| CANDELA  | 75,000   | 22,000 |
| DISTANCE | 548m     | 296m   |
| RUN TIME | 7.25 hrs | 19 hrs |



| Description   | Item #      |
|---|-------------|
| Vulcan 180 - 120V/100V AC/12V DC - Includes quick release shoulder strap Orange | 44311       |
| Vulcan 180 - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow  | 44307       |
| Size and Weight   | Battery     |
| 7.43" (18.8 cm); 2.47 lbs (1.12kg)  | Lithium-ion |



Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III; T-Class: T4

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

## VULCAN CLUTCH®

  
IP67

Multi-function lantern with adjustable head and versatile clamping handle

- 340° articulating head aims the beam where you need it and 20° downcast head for footpath lighting
- Flash mode for use as an exit marker/ warning beacon
- Three white LEDs produce extreme brightness and two ultra-bright blue taillight LEDs provide visibility in thick smoke

|          | HIGH    | LOW    |
|----------|---------|--------|
| LUMENS   | 1,700   | 380    |
| CANDELA  | 67,500  | 15,000 |
| DISTANCE | 520m    | 245m   |
| RUN TIME | 6.5 hrs | 18 hrs |

Flash runs 25 hours

| Description  | Item # |
|--|--------|
| Vulcan Clutch - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange           | 44361  |
| Vulcan Clutch - Vehicle Mount System - 12V DC - Includes quick release shoulder strap - Orange | 44365  |
| Vulcan Clutch - Light Only - Includes quick release shoulder strap - Orange                    | 44360  |
| Vulcan Clutch - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow              | 44371  |
| Vulcan Clutch - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap - Yellow    | 44375  |
| Vulcan Clutch - Light Only - Includes heavy duty shoulder strap - Yellow                       | 44370  |

| Size and Weight                      | Battery     |
|--------------------------------------|-------------|
| 9.39" (23.85 cm); 2.84 lbs (1.288kg) | Lithium-ion |



### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



## FIRE VULCAN® LED

  
IPX7

Lightweight lantern with two ultra-bright blue taillight LEDs

- Bright beam reaches long distances while still providing optimum peripheral illumination
- Two Models: Standard System with AC/DC and Vehicle Mount with 12V DC direct wire charging rack; both models include a quick release buckle strap

| Description   | Item # |
|---|--------|
| Fire Vulcan LED - Standard System - 120V/100V AC/12V DC - Includes shoulder strap and rack - Orange     | 44450  |
| Fire Vulcan LED - Vehicle Mount System - 12V DC - Includes direct wire rack and shoulder strap - Orange | 44451  |
| Fire Vulcan LED - Light Only - Orange   | 44454  |

| Size and Weight                  | Battery     |
|----------------------------------|-------------|
| 7.5" (19.05 cm); 1.85 lbs (839g) | Lithium-ion |

|          | HIGH    | LOW    |
|----------|---------|--------|
| LUMENS   | 180     | 80     |
| CANDELA  | 100,000 | 45,000 |
| RUN TIME | 5 hrs   | 10 hrs |



Class I, Div. 2, Grps. A, B, C, D;  
Class II, Div. 2, Grps. F, G;  
Class III, T-Code: T4

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



# LANTERN ACCESSORIES

| DESCRIPTION                        | ITEM # | VULCAN 180 | VULCAN 180 HAZ-LO | VULCAN CLUTCH | PORTABLE SCENE LIGHT | PORTABLE SCENE LIGHT EXT | PORTABLE SCENE LIGHT II | PORTABLE SCENE LIGHT III | LITEBOX 1MILLION | LITEBOX/FIREBOX | FIRE VULCAN |
|------------------------------------|--------|------------|-------------------|---------------|----------------------|--------------------------|-------------------------|--------------------------|------------------|-----------------|-------------|
| Quick Release Strap                | 44050  | ✓          | ✓                 | ✓             |                      |                          |                         |                          | ✓                | ✓               | ✓           |
| Heavy Duty Strap                   | 45232  | ✓          |                   | ✓             |                      |                          |                         |                          | ✓                | ✓               | ✓           |
| Heavy Duty Strap w/Carabiner Lock  | 45677  |            |                   |               | ✓                    | ✓                        |                         |                          |                  |                 |             |
| Standard Mounting Rack - Orange    | 45070  |            |                   |               |                      |                          |                         |                          | ✓                | ✓               |             |
| Vehicle Mounting Rack - Orange     | 45071  |            |                   |               |                      |                          |                         |                          |                  | ✓               |             |
| Vehicle Mounting Rack - Yellow     | 45074  |            |                   |               |                      |                          |                         |                          |                  | ✓               |             |
| Standard Charging Rack - Black     | 44103  |            |                   |               |                      |                          |                         |                          |                  |                 | ✓           |
| Vehicle Mounting Rack - Black      | 44132  |            |                   |               |                      |                          |                         |                          |                  |                 | ✓           |
| Standard Charging Rack - Black     | 44350  | ✓          | ✓                 | ✓             |                      |                          |                         |                          |                  |                 |             |
| Direct Wire 12V Charge Kit - Black | 44306  | ✓          |                   | ✓             |                      |                          |                         |                          |                  |                 |             |
| 12V DC (Car Socket) Charge Cord    | 22051  | ✓          |                   | ✓             |                      |                          |                         |                          | ✓                | ✓               | ✓           |
| 12V DC2 Charge Cord                | 22050  | ✓          |                   | ✓             |                      |                          |                         |                          | ✓                | ✓               | ✓           |
| 12V DC Charge Cord - 10' (3.048m)  | 22056  |            |                   |               | ✓                    | ✓                        | ✓                       | ✓                        |                  |                 |             |
| 120V AC Charge Cord                | 22060  | ✓          |                   | ✓             |                      |                          |                         |                          | ✓                | ✓               | ✓           |
| Power Supply                       | 22083  |            |                   |               | ✓                    | ✓                        | ✓                       |                          |                  |                 |             |
| PSL III Power Supply               | 22092  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |
| 120V AC Charge Cord                | 22074  |            |                   |               | ✓                    | ✓                        | ✓                       | ✓                        |                  |                 |             |
| Battery (Sealed Lead Acid)         | 45630  |            |                   |               | ✓                    | ✓                        |                         |                          |                  |                 | ✓           |
| Battery (Lithium-ion)              | 44366  |            |                   | ✓             |                      |                          |                         |                          | ✓                |                 |             |
| Battery (Lithium-ion)              | 45938  |            |                   |               |                      |                          |                         |                          |                  | ✓               |             |
| Battery (Lithium-ion)              | 44610  |            |                   |               |                      |                          |                         |                          |                  |                 | ✓           |
| Battery (Lithium-ion)              | 44351  | ✓          |                   |               |                      |                          |                         |                          |                  |                 |             |
| Battery (Lithium-ion)              | 44353  |            | ✓                 |               |                      |                          |                         |                          |                  |                 |             |
| Battery (Lithium-ion)              | 46005  |            |                   |               |                      |                          | ✓                       |                          |                  |                 |             |
| SL-P6 Battery                      | 20242  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |
| SL-P6 Battery and Charger Kit      | 20243  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |
| SL-P Series Charger                | 20244  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |
| PSL III Remote                     | 46110  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |
| PSL III Tripod                     | 46111  |            |                   |               |                      |                          |                         | ✓                        |                  |                 |             |



# SURVIVOR® X // SURVIVOR® X USB



IP67

Multi-fuel, right angle, lightweight flashlight because we understand that every ounce counts

- USB Model is rechargeable with an SL-B26 battery pack - recharges in 5 hours
- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

## Survivor X Safety Ratings



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T3/T4

### NFPA

Charging rack meets requirements of  
NFPA 1900-11.1.11.2 (2024) mounted in any position

### NFPA

Flashlight meets 500°F requirements of  
NFPA 1970-14.2 (2025)

|                    | HIGH     | LOW    |
|--------------------|----------|--------|
| LUMENS             | 250      | 60     |
| CANDELA            | 50,000   | 14,000 |
| DISTANCE           | 447m     | 237m   |
| RUN TIME Lithium   | 3.75 hrs | 15 hrs |
| RUN TIME SL-B26    | 4 hrs    | 15 hrs |
| RUN TIME Alkaline  | 5 hrs    | 15 hrs |
| Flash runs 8 hours |          |        |



## Survivor X USB Safety Ratings



Class I, II, Div. 2,  
Grps. A, B, C, D, F, G;  
Class III, T-Code: T4

### NFPA

Charging rack meets requirements of NFPA  
1900-11.1.11.2 (2024) mounted in any position

### NFPA

Flashlight meets 500°F requirements  
of NFPA 1970-14.2 (2025)

| Description                      | Orange | Yellow | Description                                       | Orange | Yellow |
|----------------------------------|--------|--------|---|--------|--------|
| Survivor X - 120V/100V AC/12V DC | 90952  | 90962  | Survivor X USB - Includes (1) SL-B26 battery pack | 90044  | 90244  |
| Survivor X - Alkaline            | 90950  | 90960  |   |        |        |

Note: The Survivor X is not compatible with legacy Survivor® chargers.

## Size and Weight

7.06" (17.92 cm);  
Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g) // SL-B26: 11.9 oz (337g)

## Battery

Rechargeable lithium-ion battery pack, (1) SL-B26  
battery pack or (3) AA alkaline batteries



# SURVIVOR PIVOT® // SURVIVOR PIVOT® USB



IP67

Multi-function, dual-beam flashlight with a 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

|                                | SPOT     |        | FLOOD    |        | COMBO    |        |
|--------------------------------|----------|--------|----------|--------|----------|--------|
|                                | HIGH     | LOW    | HIGH     | LOW    | HIGH     | LOW    |
| <b>LUMENS</b>                  | 300      | 70     | 300      | 70     | 325      | 80     |
| <b>CANDELA</b>                 | 34,000   | 8,500  | 300      | 75     | 19,000   | 5,000  |
| <b>DISTANCE</b>                | 369m     | 184m   | 35m      | 17m    | 276m     | 141m   |
| <b>RUN TIME</b> Lithium/SL-B26 | 4.25 hrs | 16 hrs | 4.25 hrs | 16 hrs | 3.75 hrs | 13 hrs |
| <b>RUN TIME</b> Alkaline       | 5.5 hrs  | 15 hrs | 5.5 hrs  | 15 hrs | 4.5 hrs  | 12 hrs |



### Survivor Pivot Safety Ratings



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T3/T4

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

### Survivor Pivot USB Safety Ratings



Class I, II, Div. 2,  
Grps. A, B, C, D, F, G;  
Class III, T-Code: T4

| Description   | Orange | Yellow |
|---|--------|--------|
| Survivor Pivot - 120V/100V AC/12V DC                        | 91802  | 91812  |
| Survivor Pivot - Alkaline - Includes battery carrier        | 91800  | 91810  |
| Survivor Pivot Magnet - 120V/100V AC/12V DC                 | 91830  | 91831  |
| Survivor Pivot Magnet - Alkaline - Includes battery carrier | 91825  | 91826  |

### Size and Weight

7.93" (20.14 cm);  
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)  
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) W/MAGNET

USB Model: 7.93" (20.14 cm)  
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)  
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

| Description  | Orange | Yellow |
|--|--------|--------|
| Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier        | 91804  | 91814  |
| Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier | 91838  | 91839  |


### Battery

Rechargeable lithium-ion battery pack, SL-B26 or (3) AA alkaline

## SURVIVOR® ACCESSORIES

| DESCRIPTION                     | ITEM # | SURVIVOR X | SURVIVOR X USB | SURVIVOR PIVOT | SURVIVOR PIVOT USB |
|---------------------------------|--------|------------|----------------|----------------|--------------------|
| 5 Unit 120V AC Bank Charger     | 90910  | √          |                | √              |                    |
| 5 Unit 12V AC Bank Charger      | 90912  | √          |                | √              |                    |
| 120V AC Charge Cord             | 22060  |            |                |                |                    |
| 12V DC2 Charge Cord             | 22050  |            |                |                |                    |
| 12V DC2 Charge Cord             | 22051  |            |                |                |                    |
| Charge Holder                   | 90345  | √          |                | √              |                    |
| Lithium-ion Battery - C1D1      | 90341  | √          |                | √              |                    |
| Alkaline/SL-B26 Battery Carrier | 90342  | √          | √              | √              | √                  |
| Li-Ion Charge Cradle            | 22100  |            | √              |                | √                  |
| SL-B26 Battery Pack - 1pk       | 22101  |            | √              |                | √                  |

Notice: The Survivor X is not compatible with legacy Survivor chargers; however, the new charger WILL charge both Streamlight's Legacy Survivors as well as the new Survivor X.

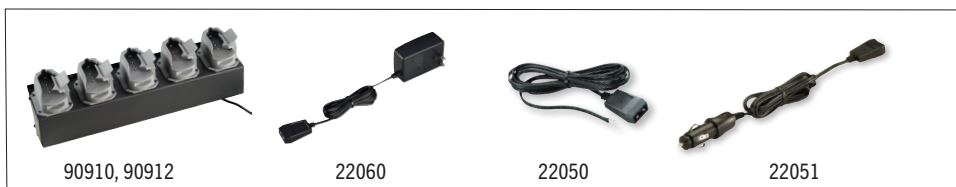

# SURVIVOR® X

250 LUMENS | BATTERY LIFE INDICATOR | HIGH, LOW, EMERGENCY FLASH MODES | IP67 RATED DUST-TIGHT AND WATERPROOF




## SL-B26<sup>®</sup> PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

| Description   | Item # |
|---|--------|
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk                     | 22101  |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk                     | 22102  |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk                     | 22105  |
| Li-Ion Charge Cradle  | 22100  |
| Li-Ion Battery Pack Kit - 120V AC - Includes (2) SL-B26 battery packs | 22011  |
| 40" (101 cm) Micro-USB Cord for use with Charge Cradle                | 22070  |
| 22" (55.88 cm) Micro-USB Cord for use with Charge Cradle              | 22081  |
| 40" (101.6 cm) USB-C Cord   | 22084  |
| 22" (55.88 cm) USB-C Cord   | 22091  |

| Size and Weight                       | Battery                              |
|---------------------------------------|--------------------------------------|
| 2.75" (7 cm); 1.7 oz (48g) - Battery  | 2600mAh SL-B26 protected             |
| 4.5" (11.4 cm); 2.4 oz (68g) - Cradle | Li-Ion USB rechargeable battery pack |

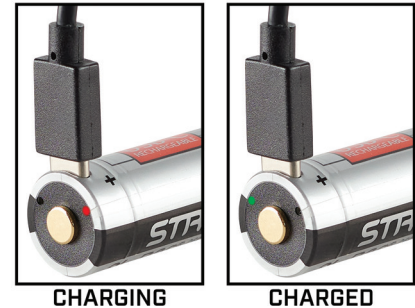

## EIGHT-UNIT SL-B26<sup>®</sup> BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

| Description  | Item # |
|--|--------|
| 8-Unit Bank Charger - 12V DC - batteries not included              | 20220  |
| 8-Unit Bank Charger - 120V/100V AC- batteries not included         | 20221  |
| 8-Unit Bank Charger - 12V DC - Includes (8) SL-B26 batteries       | 20223  |
| 8-Unit Bank Charger - 120V/100V AC - Includes (8) SL-B26 batteries | 20224  |

| Size and Weight   |
|---|
| 10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm)                     |
| 7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries |



**NFPA**  
Meets requirements of NFPA 1900-11.1.11.2 (2024)  
mounted in upright position



**Helmet Mounted,  
Right Angle  
Firefighter LED  
Flashlight**

**VANTAGE<sup>®</sup>  
180 X**

## VANTAGE<sup>®</sup> 180 X



Multi-fuel, right-angle flashlight

- Versatile - three lights in one - mount it to your helmet, attach it to your turn out gear or use as a handheld flashlight
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

|          | HIGH  | LOW    |
|----------|-------|--------|
| LUMENS   | 250   | 100    |
| CANDELA  | 7,200 | 2,650  |
| DISTANCE | 170m  | 103m   |
| RUN TIME | 5 hrs | 15 hrs |



| Description   | Item # |
|---|--------|
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Orange  | 88911  |
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Black   | 88913  |
| Vantage 180 X - Includes (2) CR123A lithium batteries and helmet bracket - Orange | 88901  |
| Vantage 180 X - Includes (2) CR123A lithium batteries and helmet bracket - Black  | 88903  |

| Size and Weight  | Battery                                       |
|--|---|
| 5.2" (13.2 cm); SL-B26: 5.9 oz (167g) // CR123A: 5.5 oz (156g) | (1) SL-B26 battery pack or (2) CR123A lithium |



**NFPA** Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

**CE** Meets applicable European Community Directives

**NFPA** Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



# UPGRADED

## VANTAGE®



IPX7

Compact, powerful, shock-proof, and virtually indestructible helmet light

- Attaches easily to helmets and hard hats
- Fits both traditional and modern helmets
- Features a bright, blue taillight LED to be seen from behind even in heavy fog

|          |        |
|----------|--------|
| LUMENS   | 225    |
| CANDELA  | 22,000 |
| DISTANCE | 297m   |
| RUN TIME | 5 hrs  |



**NFPA**

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

| Description   | Item # |
|---|--------|
| Vantage - Includes (2) CR123A lithium batteries - Black | 69140  |

| Size and Weight                 | Battery                      |
|---------------------------------|------------------------------|
| 3.08" (7.82 cm); 5.08 oz (144g) | (2) CR123A lithium batteries |

## VANTAGE® II



IPX7

Compact, low-profile helmet light designed to easily attach above or below brim of fire helmets

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be seen from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

|          | HIGH     | LOW   |
|----------|----------|-------|
| LUMENS   | 350      | 135   |
| CANDELA  | 3,500    | 1,700 |
| DISTANCE | 118m     | 80m   |
| RUN TIME | 2.25 hrs | 5 hrs |

| Description   | Item # |
|---|--------|
| Vantage II - Fire - Includes (1) CR123A lithium battery - Black   | 69331  |
| Vantage II - Industrial - Includes (1) CR123A lithium battery - Black   | 69333  |
| Vantage II - for MSA Cairns® 1010/1044 Traditional Fire Helmets - Includes (1) CR123A lithium battery - Black | 69337  |
| Bracket Kit - Fire  | 69334  |
| Bracket Kit - Industrial  | 69336  |
| Bracket Kit - for MSA Cairns® 1010/1044 Traditional Fire Helmets  | 69339  |

All right reserved. Cairns® is a registered trademark of the Cairns Trademark Trust.

| Size and Weight  | Battery            |
|--|--------------------|
| 2.37" (6.02 cm); Industrial Mount: 2.97 oz (84.2g) // Fire Mount: 3.65 oz (103.5g) | (1) CR123A lithium |



**NFPA**

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

## POLYTAC 90<sup>®</sup> X



Rugged, durable construction flashlight with a right-angled head

- Multi-fuel with built in battery life indicator
- Optional Gear Keeper<sup>®</sup> system for attaching the light to equipment featuring a retractable attachment system with a high-strength nylon tether with a 36" extension and 6 oz. of retraction force (see image to the right)

|                 | HIGH     | LOW    |
|-----------------|----------|--------|
| LUMENS          | 500      | 85     |
| CANDELA         | 7,000    | 1,050  |
| DISTANCE        | 167m     | 64m    |
| RUN TIME CR123A | 2.5 hrs  | 12 hrs |
| RUN TIME SL-B26 | 3.75 hrs | 19 hrs |

| Description  | Black | Orange | Yellow |
|--|-------|--------|--------|
| PolyTac 90 X USB - Includes (1) SL-B26 battery pack                        | 88835 | 88836  | 88838  |
| PolyTac 90 X USB - Includes (1) SL-B26 battery pack and Gear Keeper - Box  | ---   | 88837  | ----   |
| PolyTac 90 X - Includes (2) CR123A lithium batteries and Gear Keeper - Box | ---   | 88837  | ----   |
| PolyTac 90 X - Includes (2) CR123A lithium batteries                       | 88830 | 88831  | 88834  |

| Size and Weight   | Battery   |
|---|---|
| 4.43" (11.25 cm);<br>SL-B26: 4.8 oz (136g) // CR123A: 4.3 oz (122g) | (1) SL-B26 battery pack; or<br>(2) CR123A lithium batteries |



**NFPA** Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

## POLYTAC<sup>®</sup> X



Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with "rocky stipple" texture for a sure grip
- TEN-TAP<sup>®</sup> Programmable
- Removable, multi-position pocket clip

|                 | HIGH     | MEDIUM   | LOW    |
|-----------------|----------|----------|--------|
| LUMENS          | 600      | 260      | 35     |
| CANDELA         | 11,485   | 4,930    | 675    |
| DISTANCE        | 205m     | 135m     | 50m    |
| RUN TIME CR123A | 2.75 hrs | 5.5 hrs  | 34 hrs |
| RUN TIME SL-B26 | 3.5 hrs  | 5.75 hrs | 36 hrs |

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)

| Description  | Black | Yellow |
|--|-------|--------|
| PolyTac X - Includes (2) CR123A lithium batteries and holster          | 88603 | 88604  |
| PolyTac X USB - Includes (1) SL-B26 battery pack, USB cord and holster | 88613 | 88614  |

| Size and Weight  | Battery  |
|--|--|
| 5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g) | (1) SL-B26 battery pack or<br>(2) CR123A lithium batteries |

**NFPA** Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



# STREAMLIGHT®



# POLYTAC® 1X

**NEW**

## POLYTAC® 1X



Professional quality, multi-fuel flashlight with polymer construction for lightweight durability

- SL-B9® recharges in 2.5 hours via USB-C cord
- TEN-TAP® Programmable
- Removable, two way pocket clip

|                 | SL-B9  |       | CR123A  |        | AA    |        |
|-----------------|--------|-------|---------|--------|-------|--------|
|                 | HIGH   | LOW   | HIGH    | LOW    | HIGH  | LOW    |
| <b>LUMENS</b>   | 500    | 40    | 350     | 40     | 150   | 40     |
| <b>CANDELA</b>  | 18,000 | 1,000 | 12,000  | 1,000  | 5,000 | 1,000  |
| <b>DISTANCE</b> | 268m   | 63m   | 219m    | 63m    | 141m  | 63m    |
| <b>RUN TIME</b> | 1 hrs  | 8 hrs | 1.5 hrs | 14 hrs | 5 hrs | 14 hrs |

Strobe runs SL-B9: 1.75 hours // CR123A: 2.25 hours // AA: 7 hours

| Description   | Item # |
|---|--------|
| PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Black  | 86000  |
| PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Yellow | 86002  |
| PolyTac 1X USB - Includes (1) SL-B9 battery pack - Black                      | 86001  |
| PolyTac 1X USB - Includes (1) SL-B9 battery pack - Yellow                     | 86003  |

| Size and Weight  | Battery   |
|--|---|
| 4.71" (11.96 cm); SL-B9: 3.03 oz (85.9g)<br>CR123A: 2.93 oz (83.1g) // | (1) SL-B9 battery pack;<br>(1) CR123A lithium battery |
| AA: 3.2 oz (90.7g)   | (1) AA alkaline battery                               |



## PROTAC® 2.0



IP67

High-performance flashlight that produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

| Description   | Item # |
|---|--------|
| ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black | 89000  |

| Size and Weight                 | Battery                 |
|---------------------------------|-------------------------|
| 6.1" (15.49 cm); 8.25 oz (234g) | (1) SL-B50 battery pack |

|          | HIGH    | MEDIUM  | LOW    |
|----------|---------|---------|--------|
| LUMENS   | 2,000   | 570     | 100    |
| CANDELA  | 17,300  | 5,000   | 890    |
| DISTANCE | 262m    | 142m    | 60m    |
| RUN TIME | 2.5 hrs | 4.5 hrs | 25 hrs |

Strobe runs 4 hours 25 minutes



## PROTAC® HL-X



IP68

Multi-fuel flashlight produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

| CR123A   | HIGH     | MEDIUM | LOW    |
|----------|----------|--------|--------|
| LUMENS   | 1,000    | 400    | 65     |
| CANDELA  | 27,100   | 10,000 | 1,600  |
| DISTANCE | 330m     | 200m   | 80m    |
| RUN TIME | 1.25 hrs | 3 hrs  | 20 hrs |

Strobe runs 2.5 hours



| SL-B26   | HIGH    | MEDIUM   | LOW    |
|----------|---------|----------|--------|
| LUMENS   | 1,300   | 420      | 70     |
| CANDELA  | 35,000  | 11,000   | 1,800  |
| DISTANCE | 374m    | 210m     | 85m    |
| RUN TIME | 1.5 hrs | 3.75 hrs | 25 hrs |

Strobe runs 3.25 hours

| Description  | Item # |
|--|--------|
| ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Black          | 88065  |
| ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Black | 88085  |

| Size and Weight   | Battery   |
|---|---|
| 5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

## PROTAC® 90X



IPX7

Multi-fuel, everyday carry flashlight with a twist

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry by hand or easily attach to belts, harnesses, and other gear

|                 | HIGH     | MEDIUM   | LOW    |
|-----------------|----------|----------|--------|
| LUMENS          | 1,000    | 300      | 65     |
| CANDELA         | 7,350    | 2,060    | 450    |
| DISTANCE        | 171m     | 91m      | 42m    |
| RUN TIME CR123A | 2.5 hrs  | 4 hrs    | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 4.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)





| Description  | Item # |
|--|--------|
| ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black | 88094  |
| ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black  | 88095  |

| Size and Weight   | Battery  |
|---|--|
| 4.39" (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g) | SL-B26 battery pack; or (2) CR123A lithium batteries |

## PROTAC® AND POLYTAC® ACCESSORIES

| DESCRIPTION                      | ITEM # | PROTAC 2.0 | PROTAC HL-X | POLYTAC 1X | POLYTAC | POLYTAC X |
|----------------------------------|--------|------------|-------------|------------|---------|-----------|
| CR123A Batteries - 2pk           | 85175  |            | √           | √          | √       | √         |
| CR123A Batteries - 6pk           | 85180  |            | √           | √          | √       | √         |
| CR123A Batteries - 12pk          | 85177  |            | √           | √          | √       | √         |
| CR123A Batteries - 400pk         | 85179  |            | √           | √          | √       | √         |
| SL-B26 Battery Pack - 1pk        | 22101  |            | √           |            |         | √         |
| SL-B50 Battery Pack - 1pk        | 22111  | √          |             |            |         |           |
| SL-B9 Battery Pack               | 20237  |            |             | √          |         |           |
| Li-Ion USB Battery Charge Cradle | 22100  |            | √           |            |         | √         |
| 120V AC Charge Cord              | 22071  |            | √           |            |         | √         |
| 22" (55.88 cm) USB-C Cord        | 22084  | √          | √           |            |         | √         |
| Nylon Holster                    | 88043  |            | √           |            |         |           |
| Nylon Holster                    | 88086  | √          |             |            |         |           |
| Nylon Holster                    | 85905  |            |             | √          | √       | √         |
| Helmet Mount                     | 68085  |            |             |            | √       | √         |
| Poly Mount Kit                   | 68089  |            |             |            | √       | √         |
| Filter - Red                     | 69115  |            |             | √          |         | √         |
| Filter - Blue                    | 69116  |            |             | √          |         | √         |
| Filter - Green                   | 69117  |            |             | √          |         | √         |
| Filter - IR                      | 69118  |            |             | √          |         | √         |
| Flip Lens - Red                  | 88115  |            |             |            | √       | √         |
| Flip Lens - Blue                 | 85116  |            |             |            | √       | √         |
| Flip Lens - Green                | 85117  |            |             |            | √       | √         |
| Flip Lens - IR                   | 74039  |            |             |            | √       | √         |
| Red Safety Wand                  | 88057  | √          | √           |            |         |           |
| Red Safety Wand                  | 61311  |            |             | √          |         |           |
| Red Safety Wand                  | 74903  |            |             |            | √       | √         |
| Yellow Safety Wand               | 74904  |            |             |            | √       | √         |
| Glow in the Dark Safety Wand     | 74913  |            |             |            | √       | √         |
| Rubber Helmet Strap              | 99075  |            |             |            | √       | √         |



# MEGASTREAM® USB



The MegaStream® USB rechargeable EDC flashlight packs an impressive 1,800 lumens and 26,000 candela for exceptional brightness. Compact and versatile, it easily slips into your pocket or clips onto your gear. The rechargeable battery pack offers flexible charging—whether inside the light or on its own.

## MEGASTREAM® USB



**IPX7**

Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- The hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Powered by a SL-B34 rechargeable battery; recharges in 5 hours
- Sliding sleeve protects the USB port

|                 | HIGH   | MEDIUM  | LOW    |
|-----------------|--------|---------|--------|
| <b>LUMENS</b>   | 1,800  | 500     | 150    |
| <b>CANDELA</b>  | 26,000 | 7,200   | 2,100  |
| <b>DISTANCE</b> | 322m   | 170m    | 92m    |
| <b>RUN TIME</b> | 2 hrs  | 3.5 hrs | 13 hrs |

| Description   | Item # |
|---|--------|
| MegaStream USB - Includes USB-C cord, lanyard and SL-B34 battery pack - Black | 66210  |

| Size and Weight               | Battery                 |
|-------------------------------|-------------------------|
| 5.3" (13.4 cm); 5.4 oz (152g) | (1) SL-B34 battery pack |



## MICROSTREAM® USB



Rechargeable pocket light

- Clip it to your pocket or hat for hands-free use
- USB rechargeable - metal sleeve protects charge port; slide sleeve forward to reveal charge port

|          | HIGH    | LOW     |
|----------|---------|---------|
| LUMENS   | 250     | 50      |
| CANDELA  | 1,150   | 250     |
| DISTANCE | 68m     | 31m     |
| RUN TIME | 1.5 hrs | 3.5 hrs |



| Description                                 | Item # |
|---|--------|
| MicroStream USB - Includes lanyard - Black  | 66604  |
| MicroStream USB - Includes lanyard - Coyote | 66609  |

| Size and Weight                 | Battery     |
|---------------------------------|-------------|
| 3.87" (9.83 cm); 1.2 oz (34.1g) | Lithium-ion |

## MACROSTREAM® USB



High-power, rechargeable flashlight

- Durable aluminium construction
- Pocket clip attaches to visor
- Lithium-ion battery charges in 4 hours



|          | HIGH  | LOW   |
|----------|-------|-------|
| LUMENS   | 500   | 50    |
| CANDELA  | 2,000 | 220   |
| DISTANCE | 90m   | 30m   |
| RUN TIME | 2 hrs | 8 hrs |

| Description                                | Item # |
|--|--------|
| MacroStream USB - Includes lanyard - Black | 66320  |

| Size and Weight                 | Battery     |
|---------------------------------|-------------|
| 4.5" (11.43 cm); 2.2 oz (62.4g) | Lithium-ion |

## MICROSTREAM®



Ultra-compact personal light

- Clip it to your hat or pocket
- Alkaline battery powered

|          |          |
|----------|----------|
| LUMENS   | 45       |
| CANDELA  | 420      |
| DISTANCE | 41m      |
| RUN TIME | 2.25 hrs |



| Description   | Item # |
|---|--------|
| MicroStream - Includes (1) AAA alkaline battery - Black | 66318  |
| MicroStream - Includes (1) AAA alkaline battery - Red   | 66323  |

| Size and Weight                | Battery                  |
|--------------------------------|--------------------------|
| 3.6" (9.14 cm); 1.1 oz (31.2g) | (1) AAA alkaline battery |

## ACCESSORIES

| DESCRIPTION         | ITEM # | MACROSTREAM USB | MICROSTREAM USB | MEGASTREAM USB |
|---------------------|--------|-----------------|-----------------|----------------|
| Lithium-ion Battery | 66321  | √               |                 |                |
| Lithium-ion Battery | 66607  |                 | √               |                |
| SL-B34 Battery Pack | 22131  |                 |                 | √              |
| 22" USB-C Cord      | 22084  |                 |                 | √              |
| Lanyard             | 72024  | √               | √               |                |



## STINGER® 2020



Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch for ease of use
- Multiple charging options
- Anti-roll design

|                 | HIGH   | MEDIUM | LOW    |
|-----------------|--------|--------|--------|
| <b>LUMENS</b>   | 2,000  | 850    | 100    |
| <b>CANDELA</b>  | 25,000 | 10,000 | 1,200  |
| <b>DISTANCE</b> | 315m   | 200m   | 70m    |
| <b>RUN TIME</b> | 2 hrs  | 4 hrs  | 24 hrs |

Strobe runs 3.25 hours



| Description                           | Item # |
|---------------------------------------|--------|
| Stinger 2020 - 120V AC/12V DC - Black | 78101  |

| Size and Weight                  | Battery                  |
|----------------------------------|--------------------------|
| 7.67" (19.48 cm); 12.3 oz (350g) | (2) SL-B26 battery packs |

## STRION® 2020



Compact, high-lumen flashlight

- Intuitive mode selector switch for ease of use
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available

|                 | HIGH     | MEDIUM  | LOW    |
|-----------------|----------|---------|--------|
| <b>LUMENS</b>   | 1,200    | 460     | 120    |
| <b>CANDELA</b>  | 28,000   | 10,000  | 3,000  |
| <b>DISTANCE</b> | 335m     | 200m    | 110m   |
| <b>RUN TIME</b> | 1.75 hrs | 5.5 hrs | 12 hrs |

Strobe runs 3.5 hours



| Description                                     | Item # |
|---|--------|
| Strion 2020 - 120V AC/12V DC - 1 Holder - Black | 74431  |
| Strion 2020 - 120V AC/12V DC PiggyBack - Black  | 74435  |

| Size and Weight                  | Battery     |
|----------------------------------|-------------|
| 6.33" (16.1 cm); 5.7 oz (161.1g) | Lithium-ion |

## STINGER LED HL®



High-lumen flashlight provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes
- Recharges in 4.5 hours

|                 | HIGH    | MEDIUM  | LOW   |
|-----------------|---------|---------|-------|
| <b>LUMENS</b>   | 800     | 400     | 200   |
| <b>CANDELA</b>  | 24,000  | 12,000  | 6,000 |
| <b>DISTANCE</b> | 310m    | 219m    | 155m  |
| <b>RUN TIME</b> | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours





| Description   | Item # |
|---|--------|
| Stinger LED HL - 120V AC/12V DC - 2 Holders - Black | 75430  |

| Size and Weight                  | Battery |
|----------------------------------|---------|
| 8.41" (21.36 cm); 12.4 oz (352g) | NiMH    |

## STINGER® / STRION® ACCESSORIES

| DESCRIPTION                                    | ITEM # | STINGER 2020 | STINGER LEO HL | STRION 2020 |
|--|--------|--------------|----------------|-------------|
| 5 Unit Bank Charger - 120V                     | 74100  | √            | √              |             |
| 6 Unit Bank Charger - 120V                     | 74400  |              |                | √           |
| Smart Charger                                  | 75105  | √            | √              |             |
| Charger  | 74102  |              |                | √           |
| PiggyBack® Charger - Includes NiMH battery     | 75277  |              | √              |             |
| PiggyBack® Charger - batteries sold separately | 74115  |              |                | √           |
| SL-B26 Battery Pack                            | 78105  | √            |                |             |
| Lithium-ion Battery                            | 75176  |              | √              |             |
| Lithium-ion Battery                            | 74436  |              |                | √           |
| NiMH Battery Stick                             | 75375  |              | √              |             |
| 12V DC1 Charge Cord                            | 22051  | √            | √              | √           |
| 12V DC2 Charge Cord                            | 22050  | √            | √              | √           |
| "Y" USB Cord                                   | 22082  | √            |                |             |
| 120V AC Charge Cord                            | 22071  | √            | √              | √           |
| Leather Plain Holster                          | 75133  |              | √              |             |
| Leather Plain Holster                          | 74059  |              |                | √           |
| Nylon Holster                                  | 78107  | √            |                |             |
| Leather Weave Holster                          | 78114  | √            |                |             |
| Leather Weave Holster                          | 75134  |              | √              |             |
| Leather Weave Holster                          | 74060  |              |                | √           |
| Nylon Holster                                  | 75927  |              | √              |             |
| Loop Nylon Holster                             | 75928  |              | √              |             |
| Duty Holster                                   | 88053  |              | √              |             |
| Duty Holster                                   | 88051  |              |                | √           |
| Ring Holder                                    | 75906  |              | √              |             |



## DUALIE® 3AA



Features two LEDs and three lighting modes: spot, flood, spot and flood combo

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Magnetic model includes clip with integrated hang hook for hands-free use

| Description   | Item # |
|---|--------|
| Dualie 3AA - batteries not included - Yellow                    | 68751  |
| Dualie 3AA - batteries not included - Black                     | 68753  |
| Dualie 3AA - Includes (3) AA alkaline batteries - Yellow        | 68750  |
| Dualie 3AA - Includes (3) AA alkaline batteries - Black         | 68752  |
| Dualie 3AA Magnet - batteries not included - Yellow             | 68780  |
| Dualie 3AA Magnet - batteries not included - Black              | 68781  |
| Dualie 3AA Magnet - Includes (3) AA alkaline batteries - Yellow | 68782  |
| Dualie 3AA Magnet - Includes (3) AA alkaline batteries - Black  | 68783  |

| Size and Weight                                   | Battery                   |
|---|---------------------------|
| 7" (17.78 cm); 6.8 oz (193g)                      | (3) AA alkaline batteries |
| 7.5" (19.05 cm); 7.1 oz (201g) with Magnetic Clip |                           |

|          | SPOT   | FLOOD  | COMBO |
|----------|--------|--------|-------|
| LUMENS   | 140    | 140    | 245   |
| CANDELA  | 7,300  | 80     | ---   |
| DISTANCE | 171m   | 8m     | ---   |
| RUN TIME | 18 hrs | 18 hrs | 9 hrs |



Class I, II, Div. I, Grps. A, B, C, D, E, F, G  
Class III, CL I, ZN 0, IIC  
T-Code: T4; Exia



## DUALIE® RECHARGEABLE



Rechargeable, multi-function flashlight

- Mount virtually anywhere with charge holder
- Rechargeable dual beam flashlight; recharges in 8 hours
- Optional magnetic clip for hands-free use (shown in image below)

| Description  | Item # |
|--|--------|
| Dualie Rechargeable - 120V/100V AC - Yellow          | 68732  |
| Dualie Rechargeable - 120V/100V AC - Black           | 68733  |
| Dualie Rechargeable - Magnet - 120V/100V AC - Yellow | 68793  |
| Dualie Rechargeable - Magnet - 120V/100V AC - Black  | 68794  |
| Dualie Rechargeable - 12V DC - Yellow                | 68734  |
| Dualie Rechargeable - 12V DC - Black                 | 68735  |
| Dualie Rechargeable - Magnet - 12V DC - Yellow       | 68795  |
| Dualie Rechargeable - Magnet - 12V DC - Black        | 68796  |
| Dualie Rechargeable - Light Only - Yellow            | 68730  |
| Dualie Rechargeable - Light Only - Black             | 68731  |
| Dualie Rechargeable - Magnet - Light Only - Yellow   | 68785  |
| Dualie Rechargeable - Magnet - Light Only - Black    | 68786  |

| Size and Weight   | Battery     |
|---|-------------|
| 7" (17.78 cm); 6.8 oz (193g) // with Magnet 7.5" (19.05 cm); 7.09 oz (201g) | Lithium-ion |

|          | SPOT     | FLOOD    | COMBO   |
|----------|----------|----------|---------|
| LUMENS   | 180      | 105      | 275     |
| CANDELA  | 11,500   | 60       | --      |
| DISTANCE | 171m     | 18m      | --      |
| RUN TIME | 7.25 hrs | 13.5 hrs | 5.5 hrs |



Class I, II, Div. I, Grps. A, B, C, D, E, F, G  
Class III, CL I, ZN 0, IIC  
T-Code: T4; Exia



## 4AA PROPOLYMER® LUX



Durable polymer flashlight with a long-reaching beam

- Ergonomically shaped for maximum hand support
- Unbreakable, scratch-resistant lens

|          |        |
|----------|--------|
| LUMENS   | 67     |
| CANDELA  | 12,000 |
| LUMENS   | 219m   |
| RUN TIME | 6 hrs  |



| Description   | Item # |
|---|--------|
| 4AA ProPolymer Lux Div. 2 - Includes (4) AA alkaline batteries - Yellow | 68244  |
| 4AA ProPolymer Lux Div. 2 - Includes (4) AA alkaline batteries - Black  | 68344  |
| 4AA ProPolymer Lux Div. 1 - Includes (4) AA alkaline batteries - Yellow | 68602  |
| 4AA ProPolymer Lux Div. 1 - Includes (4) AA alkaline batteries - Black  | 68702  |

4AA Lux Div. 1

Class I, II, Div. 1, Grps. C, D, F, G;  
Class I, Div. 2, Grps. A, B, C, D;  
Class III, T-Code: T4

4AA Lux Div. 2

Class I, Div. 2, Grps. A, B, C, D;  
Class II, Div. 2, Grps. F, G;  
Class III, T-Code: T3C

| Size and Weight                | Battery                   |
|--------------------------------|---------------------------|
| 7" (17.78 cm); 7.6 oz (178.6g) | (4) AA alkaline batteries |

## DUALIE® ACCESSORIES

| DESCRIPTION         | ITEM # | 4AA PROPOLYMER LUX | DUALIE 3AA | DUALIE RECHARGEABLE |
|---------------------|--------|--------------------|------------|---------------------|
| 6 Unit Bank Charger | 68789  |                    |            | ✓                   |
| Poly Mount Kit      | 68089  |                    | ✓          | ✓                   |
| Rubber Helmet Band  | 99075  | ✓                  | ✓          | ✓                   |
| 120V AC USB Cord    | 22071  |                    |            | ✓                   |
| 12V DC USB Cord     | 22080  |                    |            | ✓                   |
| Helmet Mount        | 68085  | ✓                  | ✓          | ✓                   |
| Charger             | 68790  |                    |            | ✓                   |



## WAYPOINT® 400



Rechargeable, high candela flashlight that illuminates out of reach places

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours

|          | HIGH     | MEDIUM  | LOW    |
|----------|----------|---------|--------|
| LUMENS   | 1,400    | 600     | 38     |
| CANDELA  | 400,000  | 165,000 | 10,000 |
| DISTANCE | 1,265m   | 812m    | 200m   |
| RUN TIME | 3.25 hrs | 7.5 hrs | 84 hrs |



| Description                           | Item # |
|---------------------------------------|--------|
| Waypoint 400 - 120V AC - Box - Yellow | 44910  |
| Waypoint 400 - 120V AC - Box - Black  | 44911  |

| Size and Weight                   | Battery     |
|-----------------------------------|-------------|
| 6.75" (17.14 cm); 1.52 lbs (691g) | Lithium-ion |

## WAYPOINT®



High-performance pistol-grip spotlight for down-range illumination

- Alkaline battery powered
- Integrated stand for hands-free lighting
- 12V DC power cord for unlimited run time

|          | HIGH    | LOW    |
|----------|---------|--------|
| LUMENS   | 750     | 60     |
| CANDELA  | 150,000 | 12,000 |
| DISTANCE | 775m    | 219m   |
| RUN TIME | 10 hrs  | 92 hrs |

12V DC Power Cord - Unlimited run time  
Emergency Signal - Runs 82 hours



| Description  | Item # |
|--|--------|
| Waypoint - Includes 12V DC power cord - Box - Yellow | 44900  |
| Waypoint - Includes 12V DC power cord - Box - Black  | 44902  |
| Waypoint - Includes 12V DC power cord - Clam - Black | 44905  |

\*12V DC power cord does not charge batteries

| Size and Weight                  | Battery                        |
|----------------------------------|--------------------------------|
| 6.75" (17.14 cm); 1.8 lbs (816g) | (4) C batteries (not included) |

## WAYPOINT® ACCESSORIES

| DESCRIPTION           | ITEM # | WAYPOINT 400 | WAYPOINT |
|-----------------------|--------|--------------|----------|
| Polymer Storage Mount | 99918  | √            |          |
| Polymer Storage Mount | 99908  |              | √        |
| 120V AC Charge Cord   | 44909  | √            |          |
| 12V AC Power Cord     | 44923  | √            |          |
| 12V AC Power Cord     | 44903  |              | √        |



## SUPER SIEGE®



Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on; recessed to avoid unintentional activation
- Rechargeable; auxiliary USB charger charges portable devices
- Glare Guard™ will shield light from behind for up-close task lighting

| Description                    | Item # |
|--------------------------------|--------|
| Super Siege - 120V AC - Yellow | 44945  |
| Super Siege - 120V AC - Coyote | 44947  |

| Size and Weight                      | Battery     |
|--------------------------------------|-------------|
| 7.5" (19.05 cm); 1 lb 14 oz (850.5g) | Lithium-ion |

| WHITE    | HIGH     | MEDIUM   | LOW       |
|----------|----------|----------|-----------|
| LUMENS   | 1,100    | 550      | 125       |
| RUN TIME | 5.75 hrs | 11.5 hrs | 36.25 hrs |
| RED      | HIGH     | SOS      | LOW       |
| LUMENS   | 2.7      | 2.7      | 1         |
| RUN TIME | 140 hrs  | 320 hrs  | 348 hrs   |



## THE SIEGE®



Compact, alkaline battery powered hand lantern

- Runs over 30 hours on high and over 12 days on low
- Battery indicator that flashes when battery is low
- Three white light settings, a red light for softer light and an SOS mode

| Description        | Item # |
|--------------------|--------|
| The Siege - Coyote | 44931  |

| Size and Weight                        | Battery         |
|--|-----------------|
| 7.25" (18.42 cm); 1 lb 15 oz (878.83g) | (3) D batteries |

| WHITE    | HIGH    | MEDIUM  | LOW     |
|----------|---------|---------|---------|
| LUMENS   | 540     | 275     | 55      |
| RUN TIME | 30 hrs  | 70 hrs  | 295 hrs |
| RED      | HIGH    | SOS     |         |
| LUMENS   | 10      | 10      |         |
| RUN TIME | 235 hrs | 430 hrs |         |



## SIEGE® ACCESSORIES

| DESCRIPTION                     | ITEM # | SUPER SIEGE | THE SIEGE |
|---------------------------------|--------|-------------|-----------|
| Glare Guard™                    | 44950  | √           | √         |
| Magnetic Accessory Base - Black | 44951  | √           |           |
| Magnetic Accessory Base - Black | 44952  |             | √         |
| 120V AC Charge Cord             | 44909  | √           |           |



## WEDGE®

**IPX7**

Everyday carry flashlight available in multiple colors, making it easier to find in your toolbox

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip



|          | THRO   | CONSTANT-ON |
|----------|--------|-------------|
| LUMENS   | 1,000  | 300         |
| CANDELA  | 3,000  | 1,200       |
| DISTANCE | 110m   | 69m         |
| RUN TIME | 35 sec | 3 hrs       |

| Description                                       | Item # |
|---|--------|
| Wedge - Includes USB-C cord, lanyard - Black      | 88810  |
| Wedge - Includes USB-C cord, lanyard - Coyote     | 88811  |
| Wedge - Includes USB-C cord, lanyard - Red        | 88814  |
| Wedge - Includes USB-C cord, lanyard - Blue       | 88817  |
| Wedge - Includes USB-C cord, lanyard - Purple     | 88818  |
| Wedge - Includes USB-C cord, lanyard - Orange     | 88820  |
| Wedge - Includes USB-C cord, lanyard - Lime Green | 88821  |

| Size and Weight                  | Battery         |
|----------------------------------|-----------------|
| 5.46" (13.87 cm); 3.3 oz (93.5g) | Lithium Polymer |



Battery charge indicator located in the on/off switch  
Charge indication:

Red – Charging // Green – Charged  
Recharges in 3 hours

## WEDGE® XT

**IPX7**

Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

|          | HIGH  | LOW    |
|----------|-------|--------|
| LUMENS   | 500   | 50     |
| CANDELA  | 1,900 | 200    |
| DISTANCE | 87m   | 28m    |
| RUN TIME | 2 hrs | 11 hrs |

| Description                                      | Item # |
|--|--------|
| Wedge XT - Includes USB-C cord, lanyard - Black  | 88812  |
| Wedge XT - Includes USB-C cord, lanyard - Coyote | 88813  |
| Wedge XT - Includes USB-C cord, lanyard - Silver | 88819  |

| Size and Weight                  | Battery         |
|----------------------------------|-----------------|
| 4.25" (10.8 cm); 2.62 oz (74.3g) | Lithium Polymer |



Charge indication LED:  
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours



**NEW**

**WEDGE<sup>®</sup> SL**



**IPX4**

Ultra-thin, unibody constructed, uniquely shaped EDC inspection flashlight

- Four LED Battery Status Indicator LED (Flashing: Charging // 4 Solid-Segment/ Stage Charge Indication (shown in image below):  
4 LEDs = 75%; 3 LEDs = 50-75%; 2 LEDs = 25-50%; 1 LED = 10-25%
- Recharges in 4 hours
- TEN-TAP<sup>®</sup> programming switch allows user selection of high (factory default) or low intensity for constant on
- Aluminum body for strength and lightweight durability



|          | THRO  | HIGH     | LOW     |
|----------|-------|----------|---------|
| LUMENS   | 500   | 100      | 50      |
| CANDELA  | 1,600 | 300      | 150     |
| DISTANCE | 80m   | 35m      | 24m     |
| RUN TIME | ---   | 1.75 hrs | 3.5 hrs |



| Description                            | Item # |
|--|--------|
| Wedge SL - Includes Bite Boot - Black  | 88840  |
| Wedge SL - Includes Bite Boot - Coyote | 88841  |
| Wedge SL - Includes Bite Boot - Silver | 88842  |

| Size and Weight                   | Battery         |
|-----------------------------------|-----------------|
| 5.65" (14.36 cm); 1.14 oz (32.3g) | Lithium Polymer |



## PROTAC® 2.0 HEADLAMP



IP64

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable



|          | HIGH     | MEDIUM  | LOW    |
|----------|----------|---------|--------|
| LUMENS   | 2,000    | 650     | 110    |
| CANDELA  | 14,500   | 4,200   | 750    |
| DISTANCE | 241m     | 130m    | 55m    |
| RUN TIME | 2.25 hrs | 4.5 hrs | 25 hrs |

| Description   | Item # |
|---|--------|
| ProTac 2.0 Headlamp - Includes (1) SL-B50 battery pack, USB-C cord, elastic and rubber straps - Black | 89001  |

| Size and Weight                    | Battery                 |
|------------------------------------|-------------------------|
| 4.92" (12.5 cm); 10.48 oz (297.1g) | (1) SL-B50 battery pack |

**NEW**

## SLEDGE®



IPX4

Low profile, multi-fuel flood headlamp

- Delivers up to 600 lumens of consistent output, with THRO® mode providing a short burst of 1,000 lumens
- Multi-function push-button switch easy to use with gloves
- 45° tilting head

|          | THRO   | HIGH     | MEDIUM   | LOW    |
|----------|--------|----------|----------|--------|
| LUMENS   | 1,000  | 600      | 300      | 100    |
| CANDELA  | 3,000  | 1,800    | 850      | 310    |
| DISTANCE | 110m   | 85m      | 58m      | 35m    |
| RUN TIME | 60 sec | 4.25 hrs | 9.25 hrs | 13 hrs |



## SLEDGE®

- RUGGED, MULTI-FUEL
- FLOOD HEADLAMP
- 1,000 LUMENS

| Description   | Item # |
|---|--------|
| Sledge - Includes elastic and rubber hard hat headstrap, (1) SL-B26 battery pack and USB-C cord - Black | 89019  |

| Size and Weight               | Battery                 |
|-------------------------------|-------------------------|
| 1.57" (4 cm); 4.6 oz (121.9g) | (1) SL-B26 battery pack |



# ENDURO® PRO




Compact, multi-purpose headlamp

- Spot and flood modes - each with high, medium and low
- Multi-function switch remembers the last mode used
- Two hard hat mounting options



| Spot     | HIGH  | MEDIUM | LOW    |
|----------|-------|--------|--------|
| LUMENS   | 200   | 75     | 25     |
| CANDELA  | 2,250 | 825    | 300    |
| DISTANCE | 95m   | 57m    | 35m    |
| RUN TIME | 6 hrs | 14 hrs | 38 hrs |

| Flood    | HIGH  | MEDIUM | LOW    |
|----------|-------|--------|--------|
| LUMENS   | 135   | 45     | 15     |
| CANDELA  | 210   | 80     | 20     |
| DISTANCE | 29m   | 18m    | 9m     |
| RUN TIME | 6 hrs | 14 hrs | 38 hrs |

| Description  | Item #                     |
|--|----------------------------|
| Enduro Pro - Includes (3) AAA alkaline batteries, rubber hard hat strap and 3M® Dual Lock® - Box - Yellow      | 61422                      |
| Hard hat clips for 1" straps  | 61437                      |
| Size and Weight  | Battery                    |
| 2.19" (5.56 cm);<br>Alkaline: 3.4 oz (96.38g) // Lithium: 3.0 oz (85.04g)                                      | (3) AAA alkaline batteries |

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



# ENDURO® PRO HAZ-LO®



Intrinsically safe with spot, flood and combo modes

- Class 1, Div. 1 safety ratings
- Multi-function switch remembers the last mode used
- 45° tilting head



Class I, Div. 1,  
Grps. A, B, C, D, E, F, G  
Class III, Class I, Zone 0,  
Group IIC Exia; T4



Permissible Flashlight.  
Approval No. 20-A190001-0.  
Tested for Intrinsic Safety in  
Methane-Air mixtures only.



|          | SPOT  | FLOOD | COMBO    |
|----------|-------|-------|----------|
| LUMENS   | 160   | 160   | 235      |
| CANDELA  | 1,350 | 100   | --       |
| DISTANCE | 73m   | 20m   | --       |
| RUN TIME | 5 hrs | 5 hrs | 4.75 hrs |

| Description   | Item #                     |
|---|----------------------------|
| Enduro Pro HAZ-LO - Includes (3) AAA alkaline batteries, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow | 61424                      |
| Size and Weight   | Battery                    |
| 2.19" (5.56 cm); 3.5 oz (99.2g)   | (3) AAA alkaline batteries |

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting





**NEW**

**SL-SIDESADDLE® // SL-SIDESADDLE® USB**



Universal helmet light designed to mount directly to a wide variety of head gear including hard hats, helmets and baseball hats

- Charge and/or replace the batteries without removing from the mount
- Use the “quick release” tab to detach the light for hand-held use while the strap system remains securely in place
- Universal strap leaves slots open/available to integrate with other accessories
- Integrated tail switch with blue LED for easy control and enhanced visibility
- Push-button switch with mode memory recalls your last setting



**ALKALINE MODEL**



**USB MODEL**



|                 | SPOT     |        | FLOOD   |        | COMBO |          |
|-----------------|----------|--------|---------|--------|-------|----------|
| Alkaline        | HIGH     | LOW    | HIGH    | LOW    | HIGH  | LOW      |
| <b>LUMENS</b>   | 250      | 60     | 235     | 60     | 300   | 110      |
| <b>CANDELA</b>  | 2,500    | 715    | 215     | 55     | 1,900 | 660      |
| <b>DISTANCE</b> | 100m     | 53m    | 29m     | 15m    | 87m   | 51m      |
| <b>RUN TIME</b> | 6.75 hrs | 12 hrs | 6.5 hrs | 16 hrs | 5 hrs | 6.75 hrs |

|                 | SPOT     |        | FLOOD |        | COMBO |       |
|-----------------|----------|--------|-------|--------|-------|-------|
| USB             | HIGH     | LOW    | HIGH  | LOW    | HIGH  | LOW   |
| <b>LUMENS</b>   | 350      | 100    | 325   | 85     | 400   | 160   |
| <b>CANDELA</b>  | 4,250    | 1,200  | 300   | 75     | 2,400 | 960   |
| <b>DISTANCE</b> | 130m     | 69m    | 35m   | 17m    | 98m   | 62m   |
| <b>RUN TIME</b> | 6.25 hrs | 12 hrs | 7 hrs | 12 hrs | 5 hrs | 7 hrs |

| Description  | Yellow | Black |
|--|--------|-------|
| SL-SideSaddle - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap) and (3) AAA alkaline batteries | 61630  | 61620 |
| SL-SideSaddle Hat Light - Includes (3) AAA alkaline batteries and hat mount  | 61636  | 61626 |

| Description   | Yellow | Black |
|---|--------|-------|
| SL-SideSaddle USB - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap), USB-C cord and (1) lithium polymer battery | 61631  | 61621 |
| SL-SideSaddle USB Hat Light - Includes (1) lithium polymer battery, USB-C cord and hat mount  | 61637  | 61627 |

| Size and Weight           | Battery                    |
|---------------------------|----------------------------|
| 3" (7.6 cm); 3.4 oz (95g) | (3) AAA alkaline batteries |

| Size and Weight           | Battery                     |
|---------------------------|-----------------------------|
| 3" (7.6 cm); 3.1 oz (88g) | (1) Lithium polymer battery |

GET MORE INFO AT [STREAMLIGHT.COM](http://STREAMLIGHT.COM)

## STYLUS PRO®



IPX4

High performance penlight

- Fits easily in your pocket
- Low battery indicator - strobes when new batteries are needed
- Abrasion and corrosion-resistant anodized aircraft aluminum construction with unbreakable, scratch resistant polycarbonate lens

|          |       |
|----------|-------|
| LUMENS   | 100   |
| CANDELA  | 950   |
| DISTANCE | 62m   |
| RUN TIME | 8 hrs |



| Description  | Item # |
|--|--------|
| Stylus Pro - Includes (2) AAA alkaline batteries - Black | 66118  |
| Stylus Pro - Includes (2) AAA alkaline batteries - Red   | 66120  |
| Nylon Holster  | 66028  |

| Size and Weight                 | Battery                    |
|---------------------------------|----------------------------|
| 5.3" (13.4 cm); 1.64 oz (46.9g) | (2) AAA alkaline batteries |

## STYLUS PRO® USB



IPX4

Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode

| WHITE LED | HIGH    | LOW     |
|-----------|---------|---------|
| LUMENS    | 350     | 90      |
| CANDELA   | 2,950   | 840     |
| DISTANCE  | 109m    | 58m     |
| RUN TIME  | 1.5 hrs | 3.5 hrs |



| Description                                   | Item # |
|---|--------|
| Stylus Pro USB - 120V AC with holster - Black | 66133  |
| Nylon Holster                                 | 66029  |

| Size and Weight               | Battery     |
|-------------------------------|-------------|
| 5.95" (15.1 cm); 1.8 oz (51g) | Lithium-ion |

## NANO LIGHT® II



IPX7

Ultra-compact keychain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

| Description  | Item # |
|--|--------|
| Nano Light II - Includes (1) AAAA alkaline battery - Black | 73020  |

| Size and Weight             | Battery           |
|-----------------------------|-------------------|
| 2.2" (5.7 cm); 0.6 oz (18g) | (1) AAAA alkaline |

|          |      |
|----------|------|
| LUMENS   | 20   |
| CANDELA  | 120  |
| DISTANCE | 22m  |
| RUN TIME | 1 hr |



## POCKET MATE®



IPX4

Small but powerful rechargeable hands-free light

- Ultra-compact design makes it easy to always carry it with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

| Description                                    | Item # |
|--|--------|
| Pocket Mate - Includes Micro-USB cord - Silver | 73300  |
| Pocket Mate - Includes Micro-USB cord - Red    | 73301  |

| Size and Weight             | Battery         |
|-----------------------------|-----------------|
| 2" (5.1 cm); 0.5 oz (14.2g) | Lithium Polymer |

|          | HIGH   | LOW  |
|----------|--------|------|
| LUMENS   | 325    | 45   |
| CANDELA  | 1,450  | 200  |
| DISTANCE | 76m    | 28m  |
| RUN TIME | 20 min | 1 hr |



**Streamlight, Inc.**  
30 Eagleville Road  
Eagleville, PA U.S.A. 19403-3996

[streamlight.com](http://streamlight.com) // [streamlightgear.com](http://streamlightgear.com)  
[800] 523-7488 Toll-Free  
[800] 220-7007 Fax  
[610] 631-0600  
[610] 631-0712 Fax

DISTRIBUTED BY: