



STREAMLIGHT®



FULL LINE

**PROFESSIONAL
ILLUMINATION TOOLS**

// STINGER® AND STRION® SERIES



// SL® SERIES



// PORTABLE SCENE LIGHT AND LANTERN SERIES



// WAYPOINT® SERIES



// SURVIVOR® SERIES



// SAFETY-RATED HANDHELD LIGHTS



Dualie® Rechargeable
pg. 48



Dualie® 3AA
pg. 49



Dualie® 3AA Laser
pg. 49



Dualie® 3AA Color-Rite®
pg. 50



Dualie® 2AA
pg. 50



Stylus Pro® HAZ-LO®
pg. 50

// ENDURO® HEADLAMP SERIES



2AAA // 2AA ProPolymer®
HAZ-LO® pg. 51



4AA ProPolymer®
LED // Lux pg. 52



Enduro® Pro USB
pg. 114



Enduro® Pro
pg. 115



Enduro®
pg. 115



Enduro® Pro HAZ-LO®
pg. 118

// SL-SIDESADDLE® AND HEADLAMP SERIES



SL-SideSaddle®
pg 116



3AA HAZ-LO®
pg. 118



USB HAZ-LO® Headlamp
pg. 119



ProTac HL® USB // HL®
Headlamps pg. 120



ProTac® 2.0 Headlamp
pg. 121



Trident®
pg. 122



Septor®
pg. 122



Argo®
pg. 122



Bandit® // Bandit® Pro
pg. 123



Double Clutch® USB
pg. 124



Sledge®
pg. 124



NEW

// STREAM™ SERIES



MegaStream®
USB pg. 126



MegaStream®
HP USB pg. 126



MicroStream®
pg. 127



MacroStream®
USB pg. 127



MicroStream®
USB pg. 127



Stylus Pro® USB
Series pg. 128



Stylus Pro®
pg. 128



Stylus ® Series
pg. 129



Stylus Reach®
pg. 130

// STREAMLIGHT® JR SERIES



Streamlight Jr. F-Stop®
pg. 131



Streamlight Jr. LED/Reach
pg. 131

// CLIPMATE®, POCKET MATE® AND NANO LIGHT® II



ClipMate® USB
pg. 130



Pocket Mate® USB
pg. 132



Nano Light® II
pg. 132

// TLR-1[®], TLR-2[®], TLR-3[®]X AND TLR-4[®] SERIES



TLR-1 HL[®]
pg. 57



TLR-1 HL[®]-X
pg. 58



TLR-1[®] HP
pg. 59



TLR-1[®] HP-X
pg. 59



TLR-1[®]//TLR-1[®]s
pg. 60



TLR-2 HL[®]
pg. 60



TLR-2 HL[®] G
pg. 60



TLR-2[®]//TLR-2[®]s
pg. 61



TLR-2[®] G
pg. 61

NEW



TLR-3[®]X
pg. 62



TLR-4[®]
pg. 63



TLR-4[®] G
pg. 63

// TLR-6[®] AND TLR-7[®] X SERIES



TLR-6[®]
pg. 64



TLR-6 HL[®]
pg. 65



TLR-7[®] X
pg. 66

UPGRADED



TLR-7[®] X Contour
Remote pg. 66



TLR-7[®] HL-X USB
pg. 68



TLR-7[®] X sub
pg. 69



TLR-7[®] HL-X sub
pg. 69

// TLR-8[®] X SERIES



TLR-8[®] HL-X
pg. 70



TLR-8[®] HL-X G
pg. 70



TLR-8[®] HL-X sub
pg. 71



TLR-8[®] HL-X G sub
pg. 71



TLR-8[®] X sub
pg. 72



TLR-8[®] X G sub
pg. 72

// TLR-9[®], TLR-10[®] AND TLR-VIR[®] II



TLR-8[®] X
pg. 73



TLR-8[®] X G
pg. 73



TLR-9[®]
pg. 73



TLR-10[®]
pg. 74



TLR-10[®] G
pg. 74



TLR-VIR[®] II
pg. 75

// TLR[®] RM SERIES



TLR[®] RM 1 HL-X
pg. 76



TLR[®] RM 1
pg. 76



TLR[®] RM 2
pg. 77



TLR[®] RM 1 Laser
pg. 78



TLR[®] RM 2 Laser
pg. 78



TLR[®] RM 1 Laser-G
pg. 79



TLR[®] RM 2 Laser-G
pg. 79

// TLR-1 HPL[®] AND TL-RACKER[®]



TLR-1 HPL[®]
pg. 80



TL-Racker[®]
pg. 81

NEW



ProTac[®] Rail Mount 1L-X
Series pg. 84



ProTac[®] Rail Mount 1
pg. 85



ProTac[®] Rail Mount 2
pg. 85

// PROTAC® RAIL MOUNT SERIES



ProTac® Rail Mount HL-X
pg. 87



ProTac® Rail Mount HL-X Pro
pg. 86



ProTac® Rail Mount HL-X Laser
pg. 87



ProTac® Rail Mount HP-X Pro
pg. 88



ProTac® 2.0 Rail Mount
pg. 88



ProTac® 2.0 Rail Mount HP
pg. 89



ProTac® Rail Mount VIR
pg. 5

NEW

// PROTAC® AND POLYTAC® SERIES



ProTac® 1L-1AA
pg. 94



ProTac® 2.0
pg. 95



ProTac® 2.0 HP
pg. 95



ProTac® 2AA-X
pg. 96



ProTac® 2L
pg. 97



ProTac® 2L-X
pg. 97



ProTac® HL-X
pg. 98



ProTac® HP-X
pg. 98



ProTac® HL®
pg. 99

NEW



ProTac® 90X
pg. 99



ProTac HL® 6
pg. 100



ProTac HL® 5-X
pg. 100



ProTac® HPL USB
pg. 101



ProTac® HPL USB
pg. 101



PolyTac® 1X
pg. 103



PolyTac® X
pg. 104



PolyTac® 90® X
pg. 105



PolyTac®
pg. 105

// SIDEWINDER® SERIES



Sidewinder Stalk®
pg. 108



Sidewinder® X
pg. 110



Sidewinder®
pg. 111



Sidewinder® Rescue
pg. 111



Sidewinder Boot®
pg. 112



Sidewinder Compact® III
pg. 112

// RECHARGEABLE BATTERY PACK



SL-B9® Battery Pack
pg. 67



SL-B26® Battery Pack
pg. 107



SL-B50® Battery Pack
pg. 106



SpeedLocker®
pg. 74



Wedge®
pg. 92



Wedge® XT
pg. 93



Wedge® SL
pg. 93

NEW



STINGER® SERIES

STINGER® 2020

Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch (as shown in the image below) for ease of use
- Multiple charging options; recharges in 8 hours
- Anti-roll design

| | HIGH | MEDIUM | LOW |
|----------|--------|--------|--------|
| LUMENS | 2,000 | 850 | 100 |
| CANDELA | 25,000 | 10,000 | 1,200 |
| DISTANCE | 315m | 200m | 70m |
| RUN TIME | 2 hrs | 4 hrs | 24 hrs |

Strobe runs 3.25 hours



IPX7



2000
LUMENS

| Description | Item # |
|---|--------|
| Stinger 2020 - 120V AC/12V DC - 1 holder - Black | 78101 |
| Stinger 2020 - 120V AC/12V DC - 1 holder - Red | 78121 |
| Stinger 2020 - 120V AC/12V DC - 1 holder - Blue | 78131 |
| Stinger 2020 - 12V DC - 1 holder - Black | 78104 |
| Stinger 2020 - Light only - Includes "Y" USB cord - Black | 78100 |
| Stinger 2020 - Light only - Includes "Y" USB cord - Red | 78120 |
| Stinger 2020 - Light only - Includes "Y" USB cord - Blue | 78130 |



| Size and Weight | Battery |
|----------------------------------|--------------------------|
| 7.67" (19.48 cm); 12.3 oz (350g) | (2) SL-B26 battery packs |

STINGER® 2020 S



Multi-function flashlight with PiggyBack® charger option

- Intuitive mode selector switch (as shown in blue image below) for ease of use
- Stinger 2020 S uses a protected li-ion rechargeable battery pack
- PiggyBack charger allows you to charge your light and a second battery pack simultaneously

| | HIGH | MEDIUM | LOW |
|----------|--------|--------|--------|
| LUMENS | 2,000 | 850 | 100 |
| CANDELA | 25,000 | 10,000 | 1,200 |
| DISTANCE | 315m | 200m | 70m |
| RUN TIME | 2 hrs | 4 hrs | 24 hrs |

Strobe runs 3.25 hours



| Description | Item # |
|---|--------|
| Stinger 2020 S - 120V AC/12V DC - PiggyBack - Black | 78201 |
| Stinger 2020 S - 120V AC/12V DC - PiggyBack - Red | 78221 |
| Stinger 2020 S - 120V AC/12V DC - PiggyBack - Blue | 78231 |
| Stinger 2020 S - 120V AC/12V DC - 1 holder - Black | 78202 |
| Stinger 2020 S - Light only - Black | 78200 |
| Stinger 2020 S - Light only - Red | 78220 |
| Stinger 2020 S - Light only - Blue | 78230 |



| Size and Weight | Battery |
|----------------------------------|-------------|
| 7.69" (19.53 cm); 12.2 oz (346g) | Lithium-ion |



STINGER LED HL® // STINGER DS LED HL®



IPX4

High-lumen, flashlight provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes; recharges in 4.5 hours
- DS model provides both a tailcap and head switch

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|-------|
| LUMENS | 800 | 400 | 200 |
| CANDELA | 24,000 | 12,000 | 6,000 |
| DISTANCE | 310m | 219m | 155m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours



| Description | LED HL | DS LED HL |
|------------------------------------|--------|-----------|
| 120V AC/12V DC - 2 holders - Black | 75430 | 75454 |
| 120V AC - Black | 75431 | 75455 |
| 12V DC - Black | 75432 | 75456 |
| 120V AC/12V DC PiggyBack - Black | 75434 | 75458 |
| Light Only - Black | 75429 | 75453 |

| Size and Weight | Battery |
|---|---------|
| LED HL: 8.41" (21.36 cm); 12.4 oz (352g) // | |
| DS LED HL: 8.85" (22.48 cm); 12.8 oz (364g) | NiMH |

STINGER® COLOR-RITE®



IPX4

Rechargeable flashlight featuring Streamlight's Color-Rite Technology®

- Provides warm white light that produces a natural balance of color
- 90 CRI LED for true color recognition of wire colors, paint and fine details
- Multi-function, push-button switch: high, medium, low or strobe

Color-Rite®

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|-------|
| LUMENS | 500 | 275 | 140 |
| CANDELA | 17,500 | 9,000 | 4,500 |
| DISTANCE | 265m | 190m | 134m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours / Color Temperature: 3,000K



| Description | Item # |
|---|--------|
| Stinger Color-Rite - 120V/100V AC - Black | 75499 |
| Stinger Color-Rite - 120V/100V AC - PiggyBack - Black | 75502 |
| Stinger Color-Rite - Light Only - Black | 75498 |

| Size and Weight | Battery |
|----------------------------------|---------|
| 8.41" (21.36 cm); 12.4 oz (352g) | NiMH |



STINGER® HPL // STINGER DS® HPL



Long-range flashlight produces an intense spot beam for illuminating objects at a distance

- Powerful beam configurations
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 800 | 400 | 200 |
| CANDELA | 48,000 | 24,000 | 12,000 |
| DISTANCE | 438m | 310m | 219m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours

| Description | HPL | DS HPL |
|------------------------------------|-------|--------|
| 120V AC/12V DC - 2 holders - Black | 75763 | 75863 |
| 120V AC - Black | 75761 | 75861 |
| 12V DC - Black | 75799 | 75899 |
| 120V AC/12V DC PiggyBack - Black | 75782 | 75882 |
| Light Only - Black | 75980 | 75900 |

| Size and Weight | Battery |
|--|---------|
| HPL: 9.23" (23.44 cm); 13.6 oz (385g) // | |
| DS HPL: 9.65" (24.51 cm); 14 oz (396g) | NiMH |

STINGER® LED // STINGER DS® LED



Rugged, rechargeable flashlight built for maximum versatility

- Optimal balance of performance and value
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

| | HIGH | MEDIUM | LOW |
|----------|--------|---------|--------|
| LUMENS | 425 | 200 | 100 |
| CANDELA | 26,000 | 12,000 | 6,000 |
| DISTANCE | 322m | 219m | 155m |
| RUN TIME | 3 hrs | 5.5 hrs | 10 hrs |

Strobe runs 7.5 hours

| Description | LED | DS LED |
|------------------------------------|-------|--------|
| 120V AC/12V DC - 2 holders - Black | 75713 | 75813 |
| 120V AC - Black | 75711 | 75811 |
| 12V DC - Black | 75712 | 75812 |
| 120V AC/12V DC PiggyBack - Black | 75732 | 75832 |
| Light Only - Black | 75710 | 75810 |

| Size and Weight | Battery |
|--|---------|
| LED: 8.41" (21.36 cm); 12.4 oz (352g) // | |
| DS LED: 8.85" (22.48 cm); 12.8 oz (364g) | NiMH |





POLYSTINGER® LED HAZ-LO®

Durable, safety-rated, rechargeable flashlight

- Unbreakable, scratch-resistant polycarbonate lens
- Non-conductive, corrosion-resistant body
- Developed for petrochemical and heavy industrial applications with hazardous atmospheres



| | HIGH | LOW |
|-----------------------------|--------|--------|
| LUMENS | 260 | 80 |
| CANDELA | 16,000 | 5,700 |
| DISTANCE | 253m | 151m |
| RUN TIME | 5 hrs | 16 hrs |
| Moonlight mode runs 20 days | | |

| Description | Yellow | Black |
|--|--------|-------|
| PolyStinger LED HAZ-LO - 120V AC /12V DC | 76412 | 76442 |
| PolyStinger LED HAZ-LO - 12V DC | 76411 | 76441 |
| PolyStinger LED HAZ-LO - Light Only | 76410 | 76440 |

| Size and Weight | Battery |
|---------------------------------|---------|
| 10.2" (25.9 cm); 13.5 oz (382g) | NiMH |



Class I, II, Div. 1, Groups C, D, F, G;
Class III, 138°C (T3C)
Non-Incendive: Class I, Div. 2
Groups A, B, C, D

POLYSTINGER® LED



All-purpose, polymer flashlight designed for the broadest range of lighting needs at the best value

- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes: high, medium, low and strobe
- Non-conductive, super-tough nylon polymer with rubberized grip
- DS model provides both a tailcap and head switch

| | HIGH | MEDIUM | LOW |
|----------|--------|---------|--------|
| LUMENS | 485 | 240 | 120 |
| CANDELA | 28,000 | 14,000 | 7,000 |
| DISTANCE | 335m | 237m | 167m |
| RUN TIME | 3 hrs | 5.5 hrs | 10 hrs |

Strobe runs 7.5 hours

| Description | LED | DS LED |
|-------------------------------------|-------|--------|
| 120V AC/12V DC - 2 Holders - Yellow | 76163 | --- |
| 120V AC/12V DC - 2 Holders - Black | 76113 | 76813 |
| 120V AC - Yellow | 76161 | --- |
| 120V AC - Black | 76111 | 76811 |
| 12V DC - Yellow | 76162 | --- |
| 12V DC - Black | 76112 | 76812 |
| 120V AC/12V DC PiggyBack - Yellow | 76182 | --- |
| 120V AC/12V DC PiggyBack - Black | 76132 | 76832 |
| Light Only - Yellow | 76160 | --- |
| Light Only - Black | 76110 | 76810 |

| Size and Weight | Battery |
|---|---------|
| LED: 8.07" (20.5 cm); 11.5 oz (326g) // DS LED: 8.64" (21.95 cm); 11.9 oz (338g) | NiMH |



ULTRASTINGER® LED



High-lumen, full size flashlight with superior down-range performance

- High, medium, low and strobes modes
- Durable, anodized aluminum body with non-slip rubberized comfort grip
- TEN-TAP® Programmable

1100
LUMENS

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 1,100 | 350 | 90 |
| CANDELA | 65,000 | 21,000 | 5,000 |
| DISTANCE | 510m | 290m | 141m |
| RUN TIME | 1.5 hrs | 4.5 hrs | 16 hrs |

Strobe runs 3.25 hours

| Description | Item # |
|---|--------|
| UltraStinger LED - 120V/12V AC/DC - 2 holders - Black | 77553 |
| UltraStinger LED - 120V/12V AC/DC - Black | 77551 |
| UltraStinger LED - 12V DC - Black | 77555 |
| UltraStinger LED - Light Only - Black | 77550 |

| Size and Weight | Battery |
|--------------------------------|---------|
| 11.82" (30 cm); 19.9 oz (564g) | NiMH |



STINGER® ACCESSORIES

| DESCRIPTION | ITEM # | STINGER 2020 | STINGER 2020 S | STINGER COLOR-RITE | STINGER LED HL // DS LED HL | STINGER HPL // DS HPL | STINGER LED // DS LED | ULTRASTINGER LED | POLYSTINGER LED HAZ-LO | POLYSTINGER LED // DS LED |
|---|--------|--------------|----------------|--------------------|-----------------------------|-----------------------|-----------------------|------------------|------------------------|---------------------------|
| 5-Unit Bank Charger | 75400 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 8-Unit SL-B26 Bank Charger - 120V DC (For more information on SL-B26 Bank Charger, visit page 107) | 22024 | ✓ | | | | | | | | |
| SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord) | 22010 | ✓ | | | | | | | | |
| SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord) | 22011 | ✓ | | | | | | | | |
| Smart Charger | 75105 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PiggyBack® Charger | 78119 | | ✓ | | | | | | | |
| PiggyBack® Charger includes batteries | 78204 | | ✓ | | | | | | | |
| Smart PiggyBack® Charger | 75277 | | | ✓ | ✓ | ✓ | ✓ | | | ✓ |
| Stinger 2020 S Battery Pack | 78118 | | ✓ | | | | | | | |
| Li-Ion Battery Stick | 75176 | | | ✓ | ✓ | ✓ | ✓ | | | ✓ |
| NiMH Battery Stick | 75375 | | | ✓ | ✓ | ✓ | ✓ | | | ✓ |
| NiMH Battery Stick | 76375 | | | | | | | | ✓ | |
| NiMH Battery Stick | 77375 | | | | | | | ✓ | | |
| SL-B26 Battery Pack - 1pk (For more information on SL-B26 Battery Pack, visit page 107) | 22101 | ✓ | | | | | | | | |
| SL-B26 Battery Carrier batteries included | 78105 | ✓ | | | | | | | | |
| SL-B26 Battery Carrier batteries NOT included | 78106 | ✓ | | | | | | | | |
| 12V DC1 Charge Cord | 22051 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 12V DC2 Charge Cord | 22050 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 120V AC Charge Cord | 22071 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| “Y” USB Cord | 22082 | ✓ | | | | | | | | |
| Stinger 2020 S Rear Door Kit | 78205 | | ✓ | | | | | | | |
| Stinger 2020 S Service Kit | 78206 | | ✓ | | | | | | | |



75400




22024



22010

22011

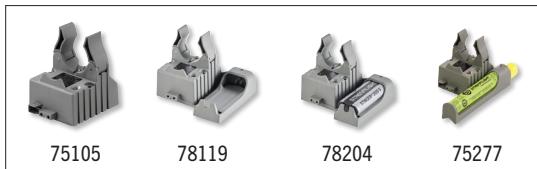

75105

78119

78204

75277



78118

75176

75375

76375

77375

22101

78105

78106



22051

22050

22071

22082



78205

78206

| DESCRIPTION | ITEM # | STINGER 2020 | STINGER 2020 S | STINGER COLOR-RITE | STINGER LED HL // DS LED HL | STINGER HPL // DS HPL | STINGER LED // DS LED | ULTRASTINGER LED | POLYSTINGER LED HAZ-LO | POLYSTINGER LED // DS LED |
|----------------------------|--------|--------------|----------------|--------------------|-----------------------------|-----------------------|-----------------------|------------------|------------------------|---------------------------|
| Stinger 2020 Switch Kit | 78115 | ✓ | | | | | | | | |
| Stinger 2020 Rear Door Kit | 78116 | ✓ | | | | | | | | |
| Stinger 2020 Service Kit | 78117 | ✓ | | | | | | | | |
| Leather Plain Holster | 75133 | | | | ✓ | | ✓ | | | ✓ |
| Leather Weave Holster | 78114 | ✓ | ✓ | | | | | | | |
| Leather Weave Holster | 75134 | | | | ✓ | | ✓ | | | ✓ |
| Nylon Holster | 75927 | | | ✓ | ✓ | ✓ | ✓ | | | |
| Nylon Holster | 75910 | | | | | | | | | ✓ |
| Nylon Holster | 78107 | ✓ | ✓ | | | | | | | ✓ |
| Loop Nylon Holster | 75928 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Duty Holster | 88053 | | | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| Ring Holder | 75906 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Facecap Ring Kit | 78113 | ✓ | ✓ | | | | | | | |
| Red Flip Lens | 75115 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | |
| Blue Flip Lens | 75116 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | |
| Green Flip Lens | 75117 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | |
| IR Flip Lens | 75027 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | |
| Red Wand | 75903 | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | |
| Red Wand | 75946 | | | | | ✓ | | | | |
| Red Wand | 75933 | | | | | | | | | ✓ |
| White Wand | 75908 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | ✓ |
| Blue Wand | 75902 | ✓ | ✓ | ✓ | ✓ | | ✓ | | | |
| Yellow Wand | 75904 | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | |
| Yellow Wand | 75948 | | | | | ✓ | | | | ✓ |
| Yellow Wand | 75934 | | | | | | | | | ✓ |
| Glow in the Dark Wand | 75913 | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | |
| Glow in the Dark Wand | 75950 | | | | | ✓ | | | | |
| Glow in the Dark Wand | 75943 | | | | | | | | | ✓ |





STRION® SERIES

STRION® 2020



Compact, high-lumen flashlight with intuitive mode selector switch

- Features independently functioning head and tail switches
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available (as shown below)

| | HIGH | MEDIUM | LOW |
|----------|----------|---------|--------|
| LUMENS | 1,200 | 460 | 120 |
| CANDELA | 28,000 | 10,000 | 3,000 |
| DISTANCE | 335m | 200m | 110m |
| RUN TIME | 1.75 hrs | 5.5 hrs | 12 hrs |

Strobe runs 3.5 hours



Battery status indicator:
Green = Charged
Red = Needs to be charged

| Description | Item # |
|--|--------|
| Strion 2020 - 120V/100V AC - 1 Holder - Black | 74431 |
| Strion 2020 - 120V/100V AC - PiggyBack - Black | 74435 |
| Strion 2020 - 12V DC - Black | 74434 |
| Strion 2020 - Light Only - Black | 74430 |

| Size and Weight | Battery |
|----------------------------------|-------------|
| 6.33" (16.1 cm); 5.7 oz (161.6g) | Lithium-ion |



STRION LED HL® / STRION® DS HL

IPX4

Delivers wide beam brightness that lights up a scene with dual switch option

- TEN-TAP® Programming
- Recharges in 3.5 hours
- DS model provides both a tailcap and head switch

| HL | HIGH | MEDIUM | LOW |
|-----------------|----------|---------|---------|
| LUMENS | 615 | 320 | 160 |
| CANDELA | 12,000 | 6,000 | 3,000 |
| DISTANCE | 219m | 155m | 110m |
| RUN TIME | 1.25 hrs | 2.5 hrs | 4.5 hrs |

Strobe runs 3 hours



| DS HL | HIGH | MEDIUM | LOW |
|-----------------|----------|---------|--------|
| LUMENS | 700 | 300 | 40 |
| CANDELA | 12,000 | 5,000 | 800 |
| DISTANCE | 219m | 141m | 57m |
| RUN TIME | 1.25 hrs | 3.5 hrs | 24 hrs |

Strobe runs 2.5 hours

| Description | HL | DS HL |
|--|-------|-------|
| 120V AC/12V DC - 2 Holders - Black | 74752 | 74612 |
| 120V AC/12V DC - 1 Holder - Black | 74751 | 74611 |
| 120V AC/12V DC - 1 Holder - Clam - Black | 74755 | 74621 |
| 120V AC/12V DC PiggyBack - Black | 74778 | 74619 |
| 120V AC - Black | 74753 | 74613 |
| 120V AC - with Grip Ring - Black | 74509 | 74620 |
| 12V DC - Black | 74754 | 74614 |
| Light Only - Black | 74750 | 74610 |

| Size and Weight | Battery |
|---|-------------|
| HL: 5.9" (14.9 cm); 5.2 oz (148g) // DS HL: 6.33" (16.1 cm); 5.4 oz (153g) | Lithium-ion |

STRION® HPL / STRION® DS HPL

IPX4

Compact duty light that produces a wide beam pattern with superior down-range performance

- TEN-TAP® Programming
- Recharges in 3.5 hours
- DS model provides both a tailcap and head switch

| DS HPL | HIGH | MEDIUM | LOW |
|-----------------|----------|---------|--------|
| LUMENS | 700 | 300 | 40 |
| CANDELA | 44,000 | 18,000 | 2,600 |
| DISTANCE | 420m | 268m | 102m |
| RUN TIME | 1.25 hrs | 3.5 hrs | 24 hrs |

Strobe runs 2.5 hours



| HPL | HIGH | MEDIUM | LOW |
|-----------------|----------|---------|---------|
| LUMENS | 615 | 320 | 160 |
| CANDELA | 40,000 | 20,000 | 10,000 |
| DISTANCE | 400m | 283m | 200m |
| RUN TIME | 1.25 hrs | 2.5 hrs | 4.5 hrs |

Strobe runs 3 hours

| Description | HPL | DS HPL |
|------------------------------------|-------|--------|
| 120V AC/12V DC - 2 Holders - Black | 74502 | 74812 |
| 120V AC/12V DC - 1 Holder - Black | 74501 | 74811 |
| 120V AC/12V DC PiggyBack - Black | 74536 | 74819 |
| 120V AC - Black | --- | 74813 |
| 12V DC - Black | 74504 | 74814 |
| Light Only - Black | 74500 | 74810 |

| Size and Weight | Battery |
|--|-------------|
| HPL: 7.1" (17.78 cm); 7.1 oz (202g) // DS HPL: 7.56" (19.2 cm); 6.9 oz (196g) | Lithium-ion |

STRION® LED // STRION® DS



IPX4

Compact, high performance flashlight that provides good beam distance, peripheral light and long lasting power - all at one exceptional value

- Recharges in 3.5 hours
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

| LED | HIGH | MEDIUM | LOW |
|-----------------|---------|----------|---------|
| LUMENS | 375 | 175 | 80 |
| CANDELA | 12,000 | 6,500 | 3,200 |
| DISTANCE | 219m | 161m | 113m |
| RUN TIME | 2.5 hrs | 4.75 hrs | 9.5 hrs |

Strobe runs 6.5 hours




| Description | LED | DS |
|------------------------------------|-------|-------|
| 120V AC/12V DC - 2 Holders - Black | 74302 | 74412 |
| 120V AC/12V DC - 1 Holder - Black | 74301 | 74411 |
| 120V AC/12V DC PiggyBack - Black | 74353 | 74419 |
| 120V AC - Black | 74303 | 74413 |
| 120V AC - with Grip Ring - Black | 74309 | 74420 |
| 12V DC - Black | 74304 | 74414 |
| Light Only - Black | 74300 | 74410 |

| DS | HIGH | MEDIUM | LOW |
|-----------------|---------|----------|--------|
| LUMENS | 375 | 150 | 40 |
| CANDELA | 12,000 | 5,000 | 1,300 |
| DISTANCE | 219m | 141m | 72m |
| RUN TIME | 2.5 hrs | 6.25 hrs | 24 hrs |

Strobe runs 5 hours

| Size and Weight | Battery |
|--|-------------|
| LED: 5.9" (14.99 cm); 5.2 oz (148g) // DS: 6.4" (16.26 cm); 5.4 oz (153g) | Lithium-ion |

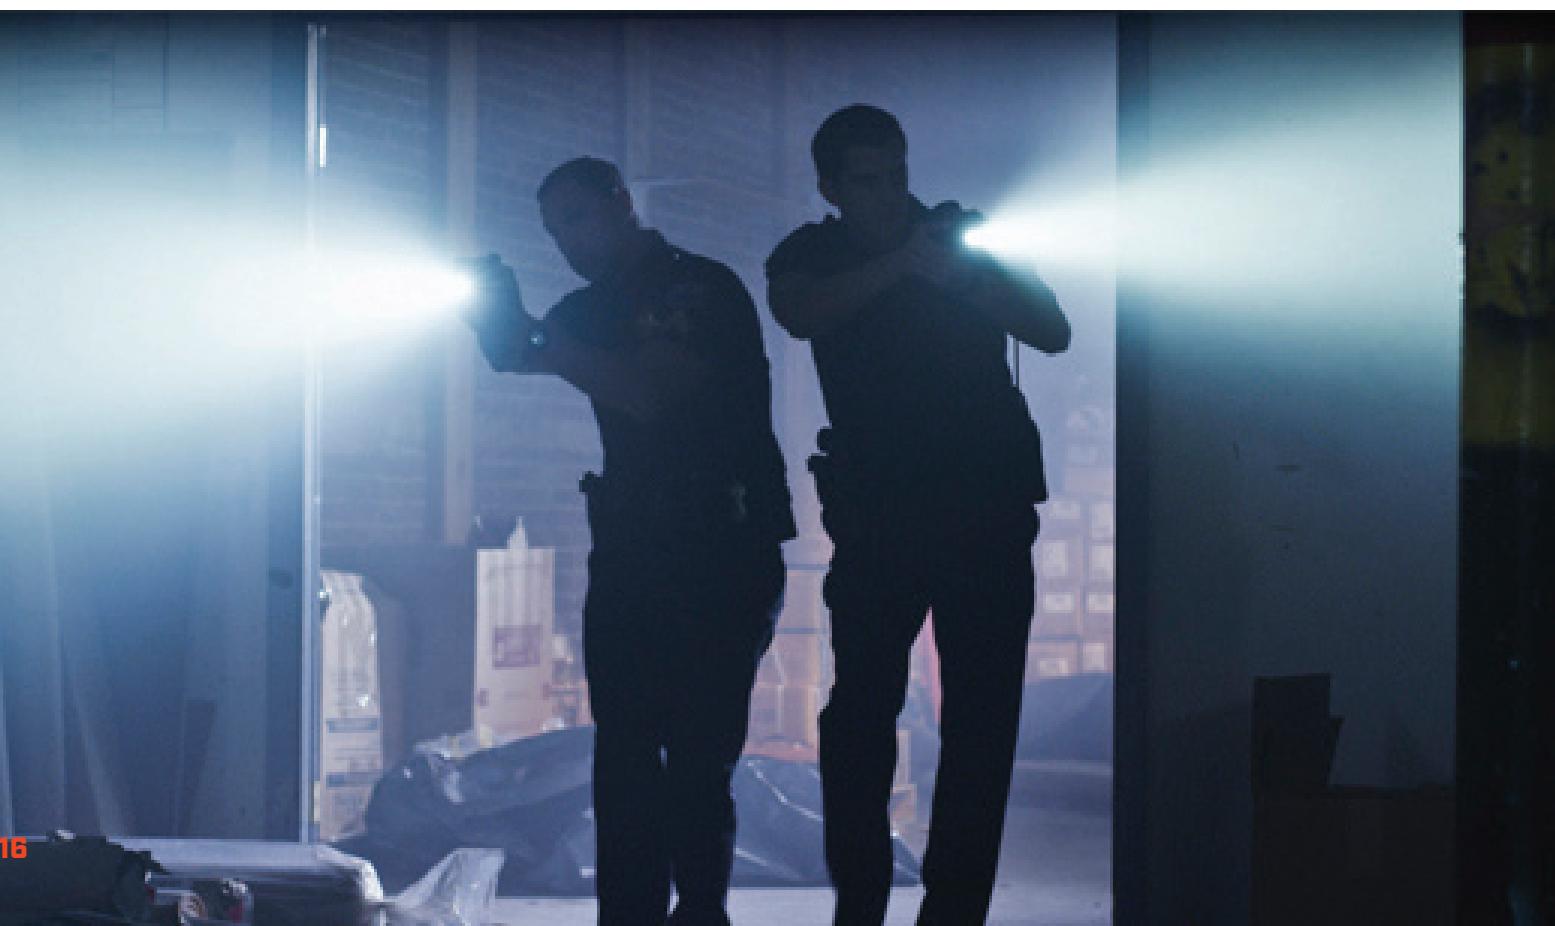


STRION® ACCESSORIES

| DESCRIPTION | ITEM # | STRION LED HL / STRION DS LED HL | STRION HPL / STRION DS HPL | STRION LED / STRION DS | STRION 2020 |
|------------------------------|--------|-------------------------------------|-------------------------------|---------------------------|-------------|
| 6-Unit Bank Charger - 120V | 74400 | ✓ | ✓ | ✓ | ✓ |
| 6-Unit Bank Charger - 12V DC | 74401 | ✓ | ✓ | ✓ | ✓ |
| PiggyBack® Charger | 74115 | ✓ | ✓ | ✓ | ✓ |
| Charger Holder | 74102 | ✓ | ✓ | ✓ | ✓ |
| Lithium-ion Battery | 74436 | ✓ | ✓ | ✓ | ✓ |
| Li-ion Battery Stick | 74175 | ✓ | ✓ | ✓ | ✓ |
| 12V DC1 Charge Cord | 22051 | ✓ | ✓ | ✓ | ✓ |
| 12V DC2 Charge Cord | 22050 | ✓ | ✓ | ✓ | ✓ |
| 120V AC Charge Cord | 22071 | ✓ | ✓ | ✓ | ✓ |
| Rail Mount | 74200 | ✓ | ✓ | ✓ | ✓ |
| Vertical Grip | 69114 | ✓ | ✓ | ✓ | ✓ |
| Leather Plain Holster | 74059 | ✓ | | ✓ | ✓ |
| Leather Weave Holster | 74060 | ✓ | | ✓ | ✓ |
| Nylon Holster | 85905 | ✓ | | ✓ | ✓ |
| Tactical Holster | 88051 | ✓ | ✓ | ✓ | ✓ |
| Red Flip Lens | 85115 | ✓ | | ✓ | ✓ |
| Green Flip Lens | 85117 | ✓ | | ✓ | ✓ |
| Blue Flip Lens | 85116 | ✓ | | ✓ | ✓ |
| Red Wand | 74903 | ✓ | | ✓ | ✓ |
| Red Wand | 75946 | | ✓ | | |
| Yellow Wand | 74904 | ✓ | | ✓ | ✓ |
| Yellow Wand | 75948 | | ✓ | | |
| Glow in the Dark Wand | 74913 | ✓ | | ✓ | ✓ |
| Glow in the Dark Wand | 75950 | | ✓ | | |



74400



74115



74102



74436



74175



22051



22050



22071



74200



69114



74059



74060



85905



88051

85115, 85117,
85116

74903, 75946



74904, 75948



74913, 75050



SL® SERIES

SL-20L®

Full size, professional grade, rechargeable, aluminum flashlight

- Tight beam for down range visibility
- Illuminated switch housing shows charge status; recharges in 9 hours
- Multi-function push-button switch



IPX4

| | HIGH | MEDIUM | LOW |
|----------|----------|--------|--------|
| LUMENS | 450 | 225 | 60 |
| CANDELA | 70,000 | 35,000 | 9,000 |
| DISTANCE | 529m | 374m | 189m |
| RUN TIME | 3.25 hrs | 5 hrs | 20 hrs |

Strobe runs 4.5 hours

| Description | Item # |
|---|--------|
| SL-20L - 120V AC/12V DC - 2 sleeves - Black | 20703 |
| SL-20L - 120V AC - Black | 20701 |
| SL-20L - 12V DC - Black | 20702 |
| SL-20L - Light Only - Black | 20700 |

| Size and Weight | Battery |
|---------------------------------|---------|
| 13.1" (33.3 cm); 1.7 lbs (770g) | NiMH |



SL-20LP®



Full size, professional grade, rechargeable, polymer flashlight

- Deep-dish parabolic reflector produces a tight beam
- Illuminated switch housing shows charge status; recharges in 4.5 hours
- Non-slip rubber comfort grip

| | HIGH | MEDIUM | LOW |
|-----------------|----------|--------|--------|
| LUMENS | 450 | 225 | 60 |
| CANDELA | 70,000 | 35,000 | 9,000 |
| DISTANCE | 529m | 374m | 189m |
| RUN TIME | 3.25 hrs | 5 hrs | 20 hrs |

Strobe runs 4.5 hours

| Description | Item # |
|---|--------|
| SL-20LP - 120V AC/12V DC - 2 sleeves - Yellow | 25323 |
| SL-20LP - 120V AC/12V DC - 2 sleeves - Black | 25303 |
| SL-20LP - 120V AC/12V DC - 2 sleeves - Orange | 25313 |
| SL-20LP - 120V AC - Yellow | 25321 |
| SL-20LP - 120V AC - Black | 25301 |
| SL-20LP - 120V AC - Orange | 25311 |
| SL-20LP - 12V DC - Yellow | 25322 |
| SL-20LP - 12V DC - Black | 25302 |
| SL-20LP - 12V DC - Orange | 25312 |
| SL-20LP - Light Only - Yellow | 25320 |
| SL-20LP - Light Only - Black | 25300 |
| SL-20LP - Light Only - Orange | 25310 |

| Size and Weight | Battery |
|---------------------------------|---------|
| 13.2" (33.5 cm); 1.3 lbs (590g) | NiMH |



SL-20L® / SL-20LP® ACCESSORIES

| DESCRIPTION | ITEM # | SL-20L | SL-20LP |
|-------------------------------|--------|--------|---------|
| 5-Unit Bank Charger - 120V AC | 21400 | ✓ | ✓ |
| 5-Unit Bank Charger - 12V DC | 21401 | ✓ | ✓ |
| Charge Sleeve | 22047 | ✓ | ✓ |
| DC2 Direct Wire Charge Cord | 22050 | ✓ | ✓ |
| DC1 Charge Cord | 22051 | ✓ | ✓ |
| 120V AC Charge Cord | 22060 | ✓ | ✓ |
| NiMH Battery Stick | 77375 | ✓ | ✓ |
| Nylon Holster | 25090 | ✓ | ✓ |
| Red Wand | 22511 | ✓ | ✓ |
| Glow in the Dark Wand | 22513 | ✓ | ✓ |
| Yellow Wand | 22519 | ✓ | ✓ |



22511



22513



22519



21400, 21401



22047



22050, 22051



77375



22060



25090

// COLOR-RITE TECHNOLOGY®

// WHAT IS COLOR-RITE TECHNOLOGY?

Color-Rite Technology is based on the Color Rendering Index (CRI) - a scale from 0-100 that indicates how a light source reflects color variations as they appear to the human eye. The higher the CRI, the more vibrant the colors appear. On the scale, lights that measure 90+ are considered "high" CRI lights and are critical for tasks requiring the most accurate color discrimination. A perfect 100 would enable us to see colors as they appear in natural sunlight.

// WHY STREAMLIGHT COLOR-RITE TECHNOLOGY?

Flashlights equipped with Streamlight's proprietary Color-Rite Technology allow users to see the color spectrum as they would in natural light. While a standard high-lumen LED light produces an ultra-bright white beam that is needed in many applications, it prevents seeing subtle color differences in, for example, auto body paint colors or electrical wiring. In contrast, a high CRI light provides a softer, warmer beam to prevent color "washout," allowing the user to see specific colors or imperfections and subtle details, regardless of the task.

// COLOR-RITE® APPLICATIONS FOR EVERY SITUATION

Streamlight offers a family of Color-Rite® lights for situations that require detailed inspections or color differentiation. For markets as diverse as automotive, industrial, law enforcement, military and even outdoor recreation, we have developed high CRI lights with Color-Rite Technology® for a wide variety of tasks that require exacting attention to detail. From repairing electrical wires to inspecting paint finishes or examining forensic evidence, count on Streamlight's Color-Rite® products help get the job done efficiently and safely.

Our family of Color-Rite® products include the following:



STINGER® COLOR-RITE®

Rechargeable, warm white (3,000K)
90 CRI LED with Streamlight's
Color-Rite Technology



DUALIE® 3AA COLOR-RITE®

Intrinsically-safe multi-function dual beam flashlight with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight's Color-Rite Technology



STINGER SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



STRION SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



SYCLONE®

Ultra-compact work light with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight's Color-Rite Technology



FLIPMATE®

Compact work light with cool white LEDs and warm white (4,000K) 90 CRI LEDs with Streamlight's Color-Rite Technology - each with high and low modes

// A LIGHT FOR EVERY SITUATION

// COLOR-RITE® APPLICATIONS BY MARKET

LAW ENFORCEMENT/MILITARY

- **Improve tracking in low-light conditions.** High CRI lights like the Stinger® Color-Rite® help border patrol and other law enforcement agencies reveal subtle details of tracks and other markings that white LEDs with their bright “hot spots” can miss.
- **Detect trace evidence.** Forensic teams can more clearly spot fingerprints, fibers and other trace evidence on glass and other slick surfaces with high CRI lights such as the Stinger Color-Rite.
- **Enhance visualization.** High CRI lights can help cut through murky lake or ocean water, thick smoke or fog, and even heavy dust when pursuing vehicles in rough terrain.

AUTOMOTIVE

- **Match and identify colors.** The Dualie® 3AA Color-Rite®, Stinger Switchblade®, Cyclone® and Strion Switchblade® are ideal for color matching and identifying body imperfections before and after paint repairs.
- **Identify defects.** Paint defects such as swirl marks and color sanding scratches are easily identifiable with high CRI LEDs.
- **Distinguish colors.** When troubleshooting electrical short circuits or other motor vehicle repairs, high CRI lights assist in differentiating colored wires in hard-to-see areas under a hood or carriage.
- **Reduce glare when working in tight spaces.** Because high CRI LEDs reflect back less light than bright white LEDs, mechanics can see greater detail when working in dark, hard-to-reach places underneath a car or under the hood.

INDUSTRIAL

- **Differentiate wire colors in electrical panels.** In plants and other facilities, high CRI lights like the Dualie® 3AA Color-Rite® and Cyclone® provide better color contrast of intricate wires in electrical cabinets, helping technicians to work more efficiently.
- **Spot imperfections.** High CRI lights allow for contrast of color to identify imperfections in finish inspections of products including parts.
- **Reduce eye fatigue.** The soft lighting of high CRI LEDs reduces eye strain and fatigue for many users.

FIRE/RESCUE/EMS

- When responding to fires, accidents or other events under low light conditions, high CRI area lights such as the Dualie® 3AA Color-Rite®, Stinger Switchblade® and Stinger® Color-Rite® can be essential tools, permitting first responders to see the color spectrum as they would in natural daylight.
- High CRI lights allow investigators to see specific colors, imperfections and subtle details when examining fire or accident scenes and gathering evidence.

OUTDOOR RECREATION

- **Identify blood trails.** State-of-the-art blood trailing technology in high CRI lights, such as the Stinger® Color-Rite®, reduces certain colors in the spectrum to better amplify blood trails.
- **Visualize in low-light conditions.** Hikers and other outdoor enthusiasts use high CRI lights like the Dualie® 3AA Color-Rite® to better see obstacles when navigating trails at night and under other low-light conditions.



WORK LIGHT SERIES

STINGER SWITCHBLADE®

180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- Recharges in 6.25 hours
- Ultra thin design fits in tight spaces and folds in half for storage




Color-Rite®

| | COOL WHITE | HIGH CRI (90) | UV LED |
|----------|------------|---------------|--------|
| LUMENS | 800 | 600 | 500 mW |
| RUN TIME | 3.75 hrs | 3.75 hrs | 15 hrs |



| Description | Item # |
|---|--------|
| Stinger Switchblade - 120V/100V AC - 1 holder - Red | 76801 |
| Stinger Switchblade - with USB cord - Red | 76800 |

| Size and Weight | Battery |
|--|-------------|
| Folded - 9.8" (24.89 cm); Extended - 17" (43.18 cm); 17.1 oz (485g) | Lithium-ion |



STRION SWITCHBLADE®



Compact, rechargeable, 180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- PiggyBack® charger option for extra battery, ready to replace and use whenever you need it
- Lithium-ion battery recharges in 4 hours

Color-
Rite®



| | COOL WHITE | HIGH CRI (90) | UV LED |
|----------|------------|---------------|--------|
| LUMENS | 500 | 400 | 500 mW |
| RUN TIME | 3 hrs | 3 hrs | 5 hrs |

| Description | Item # |
|--|--------|
| Strion Switchblade - with USB cord - Red | 74850 |
| Strion Switchblade - 120V/100V AC - 1 holder - Red | 74851 |
| Strion Switchblade - 120V/100V AC PiggyBack - Red | 74854 |

| Size and Weight | Battery |
|---|-------------|
| Folded - 6" (15.24 cm); Extended - 10.75" (27.3 cm); 6.4 oz (181g) | Lithium-ion |



SYCLONE® JR.



Ultra-compact work light with a cool white LED for everyday use

- Head swivels 360° to aim it where you need it, adjustable with one hand
- Multi-function, push-button switch with charge indicator - charges in 4.5 hours
- Go hands-free with the flat, magnetic base and stowable hook

| | HIGH | LOW |
|----------|----------|---------|
| LUMENS | 210 | 85 |
| DISTANCE | 79m | 49m |
| RUN TIME | 3.75 hrs | 8.5 hrs |



Hands-free applications: 1.) Magnetic base 2.) Stowable hang hook

| Description | Item # |
|---------------------------------------|--------|
| Syclone Jr. - Includes USB cord - Red | 61530 |

| Size and Weight | Battery |
|-----------------------------|-----------------|
| 2.04" (5.18 cm); 2 oz (57g) | Lithium polymer |



SYCLONE®



Compact, rechargeable work light with Color-Rite Technology®

- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam



| Spot/Cool White | HIGH | MEDIUM | LOW |
|-----------------|-------|---------|---------|
| LUMENS | 400 | 200 | 100 |
| DISTANCE | 141m | 95m | 72m |
| RUN TIME | 2 hrs | 4.5 hrs | 9.5 hrs |
| Flood/90 CRI | HIGH | MEDIUM | LOW |
| LUMENS | 300 | 150 | 75 |
| DISTANCE | 48m | 35m | 24m |
| RUN TIME | 2 hrs | 4 hrs | 8 hrs |

Color Temperature 4,000K

Color-Rite®

| Description | Item # |
|-----------------------------------|--------|
| Syclone - Includes USB cord - Red | 61510 |

| Size and Weight | Battery |
|--------------------------------|-----------------|
| 2.97" (7.54 cm); 5.3 oz (150g) | Lithium polymer |

FLIPMATE®



Work light featuring a 270° rotating light bar

- Double function light bar with 90 CRI LEDs and cool white LEDs
- Go hands-free with the magnetic base, stowable hang hook or flat, stable bottom for standing on its own
- USB rechargeable; recharges in 4.5 hours

| | COOL WHITE | | 90 CRI | |
|----------|------------|----------|--------|-------|
| | HIGH | LOW | HIGH | LOW |
| LUMENS | 500 | 250 | 400 | 200 |
| RUN TIME | 4 hrs | 5.75 hrs | 4 hrs | 6 hrs |

Color Temperature 4,000k



Color-Rite®



| Description | Item # |
|--------------------------------------|--------|
| FlipMate - Includes USB cord - Black | 61500 |
| FlipMate - Includes USB cord - Red | 61501 |
| FlipMate - Includes USB cord - Blue | 61502 |

| Size and Weight | Battery |
|---|-------------|
| Folded: 4.58" (11.63 cm) // Extended: 7.94" (20.17); 8.7 oz (247g) | Lithium-ion |

BEARTRAP®



Multi-function work light with high power and big performance

- Produces bright white light in both spot and flood modes
- Go hands-free - clamps virtually anywhere, use its magnetic base or stand on its own
- Will continue to charge while plugged in and in use; recharges in 5.5 hours

2000
LUMENS

| | SPOT | | | FLOOD | | |
|----------|---------|----------|----------|---------|--------|----------|
| | HIGH | MEDIUM | LOW | HIGH | MEDIUM | LOW |
| LUMENS | 1,000 | 450 | 325 | 2,000 | 1,000 | 575 |
| CANDELA | 7,500 | 3,600 | 2,500 | 1,200 | 680 | 360 |
| DISTANCE | 174m | 120m | 100m | 69m | 52m | 38m |
| RUN TIME | 4.5 hrs | 8.75 hrs | 12.5 hrs | 2.5 hrs | 5 hrs | 8.75 hrs |

| Description | Item # |
|-------------------------------|--------|
| BearTrap - 120V/100V AC - Red | 61520 |

| Size and Weight | Battery |
|-------------------------------------|-------------|
| 7.62" (19.35 cm); 2 lbs 3 oz (992g) | Lithium-ion |





BEARTRAP® 360



Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it or use its magnetic base
- Will continue to charge while plugged in and in use

2000
LUMENS







| | SPOT | | | FLOOD | | |
|----------|---------|----------|----------|---------|--------|----------|
| | HIGH | MEDIUM | LOW | HIGH | MEDIUM | LOW |
| LUMENS | 1,000 | 450 | 325 | 2,000 | 1,000 | 575 |
| CANDELA | 7,500 | 3,600 | 2,500 | 1,200 | 680 | 360 |
| DISTANCE | 174m | 120m | 100m | 69m | 52m | 38m |
| RUN TIME | 4.5 hrs | 8.75 hrs | 12.5 hrs | 2.5 hrs | 5 hrs | 8.75 hrs |

| Description | Item # |
|-----------------------------------|--------|
| BearTrap 360 - 120V/100V AC - Red | 61523 |

| Size and Weight | Battery |
|--------------------------------------|-------------|
| 7.62" (19.35 cm); 2 lbs 5 oz (1049g) | Lithium-ion |

WORK LIGHT ACCESSORIES

| DESCRIPTION | ITEM # | BEARTRAP SERIES | STRION SWITCHBLADE | STINGER SWITCHBLADE | FLIPMATE | SYCLONE | SYCLONE JR. |
|--|--------|--------------------|-----------------------|------------------------|----------|---------|-------------|
| Stinger 6 Unit Bank Charger 120V | 75400 | | | ✓ | | | |
| Strion 6 Unit Bank Charger 12V | 74401 | | ✓ | | | | |
| Strion 6 Unit Bank Charger 120V | 74400 | | ✓ | | | | |
| PiggyBack® Charger *batteries and cord sold separately | 74115 | | ✓ | | | | |
| Smart Charger Holder *cord sold separately | 75105 | | | ✓ | | | |
| Charger Holder *cord sold separately | 74102 | | ✓ | | | | |
| Lithium-ion Battery - BearTrap Series | 61522 | ✓ | | | | | |
| Battery Stick - Lithium-ion | 74175 | | ✓ | | | | |
| Stinger Switchblade Battery | 76805 | | | ✓ | | | |
| 12V DC Adapter | 44923 | ✓ | | | | | |
| 120V USB Charge Cord | 22060 | | ✓ | ✓ | | | |
| 12V DC1 Charge Cord | 22051 | | ✓ | ✓ | | | |
| 12V DC2 Charge Cord | 22050 | | ✓ | ✓ | | | |
| 40" USB Cord | 22070 | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 22" USB Cord | 22081 | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 120V AC USB Charge Cord | 22071 | | | ✓ | | | |
| 120V AC BearTrap Cord | 44922 | ✓ | | | | | |

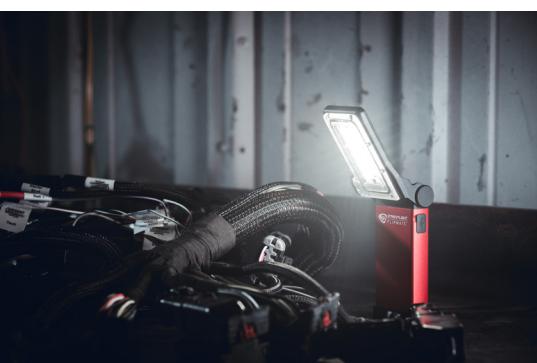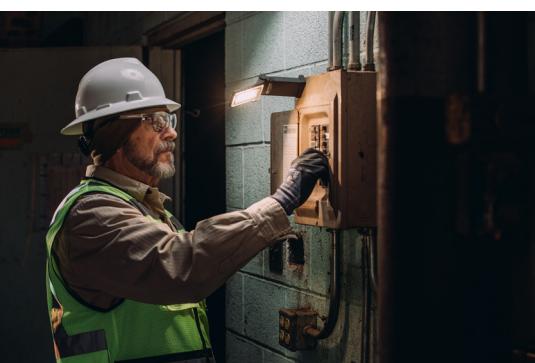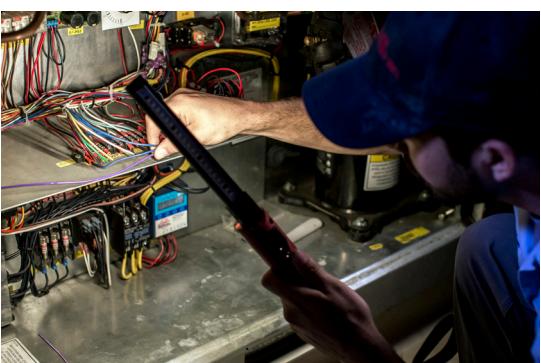



PORTABLE SCENE LIGHT SERIES

PORTABLE SCENE LIGHT II



Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for “light tower” capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.



| | 100% | 80% | 60% | 40% | 20% |
|----------|--------|----------|----------|----------|--------|
| LUMENS | 10,000 | 8,300 | 6,300 | 4,500 | 2,300 |
| RUN TIME | 2 hrs | 2.75 hrs | 3.75 hrs | 5.75 hrs | 11 hrs |



| Description | Item # |
|---|--------|
| Portable Scene Light II - 120V/12V DC - Red | 46000 |

| Size and Weight | Battery |
|-----------------------------------|-------------|
| 16" (40.6 cm); 15.56 lbs (7.06kg) | Lithium-ion |

PORTABLE SCENE LIGHT



Portable and collapsible flood light with extreme brightness

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space, rugged enough to withstand rough terrain and resists 40 mph winds

| | HIGH | MEDIUM | LOW |
|----------|--------|--------|--------|
| LUMENS | 10,000 | 5,300 | 2,000 |
| CANDELA | 95,000 | 49,500 | 22,450 |
| DISTANCE | 616m | 445m | 300m |
| RUN TIME | 2 hrs | 4 hrs | 12 hrs |



| Description | Item # |
|--|--------|
| Portable Scene Light - 120V AC/12V DC - Yellow | 45670 |
| Portable Scene Light EXT - 120V AC/12V DC - Yellow | 45680 |

| Size and Weight | Battery |
|---|--|
| 22.5" (57.2 cm); 25.8 lbs (11.7kg) EXT: 25.5" (64.8 cm); 26.3 lbs (11.9kg) | Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord |



LANTERN SERIES

VULCAN CLUTCH®



Multi-function lantern with adjustable head and versatile clamping handle

- 340° articulating head aims the beam where you need it
- 20° downcast head for footpath lighting
- Flash mode for use as an exit marker/warning beacon
- Three white LEDs produce extreme brightness and two ultra-bright blue taillight LEDs provide visibility from behind

| | HIGH | LOW |
|-----------------|---------|--------|
| LUMENS | 1,700 | 380 |
| CANDELA | 67,500 | 15,000 |
| DISTANCE | 520m | 245m |
| RUN TIME | 6.5 hrs | 18 hrs |

Flash runs 25 hours



Description

| | |
|--|--------------|
| Vulcan Clutch - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange | Item # 44361 |
| Vulcan Clutch - Vehicle Mount System - 12V DC - Includes quick release shoulder strap - Orange | 44365 |
| Vulcan Clutch - Light Only - Includes quick release shoulder strap - Orange | 44360 |
| Vulcan Clutch - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow | 44371 |
| Vulcan Clutch - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap - Yellow | 44375 |
| Vulcan Clutch - Light Only - Includes heavy duty shoulder strap - Yellow | 44370 |


Item

Size and Weight

9.39" (23.85 cm); 2.84 lbs (1.288kg)

Battery

Lithium-ion

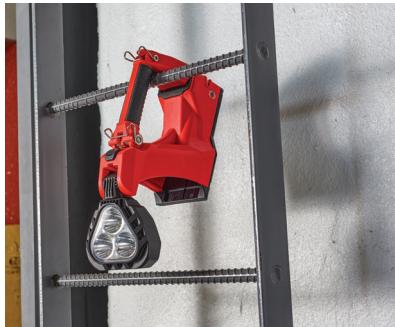

VULCAN® 180 HAZ-LO®

Portable lantern, developed for use in hazardous locations

- 180° tilting head for precise light direction (as shown in image below)
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Rechargeable with battery status/ charge indicator; recharges in 16 hours

| | HIGH | LOW |
|----------|--------|--------|
| LUMENS | 450 | 130 |
| CANDELA | 25,000 | 8,000 |
| DISTANCE | 316m | 179m |
| RUN TIME | 14 hrs | 30 hrs |



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, III, Div. 1, Grps. A, B, C, D, E, F, G; Class I, Zone 0, Grps. IIC, Class III; T-Code: T4



| Description | Yellow | Orange |
|---|--------|--------|
| Vulcan 180 HAZ-LO - Standard System - 120V AC/12V DC, Includes quick release shoulder strap | 44321 | 44331 |
| Vulcan 180 HAZ-LO - Vehicle Mount System - 12V DC, Includes quick release shoulder strap | 44325 | 44335 |
| Vulcan 180 HAZ-LO - Without Charger | 44320 | 44330 |

| Size and Weight | Battery |
|--------------------------------------|-------------|
| 7.43" (18.87 cm); 2.45 lbs (1.111kg) | Lithium-ion |

VULCAN® 180

Rechargeable, waterproof lantern with tilting head

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 11 hours

| | HIGH | LOW |
|----------|----------|--------|
| LUMENS | 1,200 | 350 |
| CANDELA | 75,000 | 22,000 |
| DISTANCE | 548m | 296m |
| RUN TIME | 7.25 hrs | 19 hrs |



| Description | Yellow | Orange |
|---|--------|--------|
| Vulcan 180 - Standard System - 120V/100V AC/12V DC - Includes quick release strap | 44307 | 44311 |
| Vulcan 180 - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap | 44305 | 44315 |
| Vulcan 180 - Without Charger | 44300 | 44310 |

| Size and Weight | Battery |
|------------------------------------|-------------|
| 7.43" (18.8 cm); 2.47 lbs (1.12kg) | Lithium-ion |



Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III; T-Class: T4

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

E-FLOOD® LITEBOX® // E-FLOOD® FIREBOX®

IPX4

Lightweight lantern providing diffused area lighting

- 90° articulating head for precise beam direction
- Four LEDs with shallow reflectors for a widened beam pattern
- Recharges in 7 hours

| | HIGH | LOW |
|----------|---------|--------|
| LUMENS | 1,500 | 350 |
| CANDELA | 4,700 | 1,000 |
| DISTANCE | 137m | 63m |
| RUN TIME | 8.5 hrs | 20 hrs |



NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

| Description | Orange | Yellow |
|---|--------|--------|
| E-Flood LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack | 45801 | 45821 |
| E-Flood LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap | 45805 | 45825 |
| E-Flood LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost | 45807 | --- |
| E-Flood LiteBox - Light Only | 45806 | 45826 |
| E-Flood FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack | 45811 | --- |
| E-Flood FireBox Vehicle Mount System - 12V DC - Includes shoulder strap | 45815 | --- |
| E-Flood FireBox - Light Only | 45832 | --- |

| Size and Weight | Battery |
|------------------------------------|-------------|
| 11.2" (28.4 cm); 3.1 lbs (1.389kg) | Lithium-ion |

E-SPOT® LITEBOX® // E-SPOT® FIREBOX®

IPX4

Lightweight, high candela lantern with articulating head

- 90° swivel neck to aim the beam where you need it
- Four LEDs with deep parabolic reflectors for a long-range, spot beam pattern
- Recharges in 7 hours

| | HIGH | LOW |
|----------|---------|--------|
| LUMENS | 1,500 | 350 |
| CANDELA | 110,000 | 25,000 |
| DISTANCE | 663m | 316m |
| RUN TIME | 8.5 hrs | 20 hrs |



Special Features:

- Flat side allows light to tilt and stand on its own
- Push button switch with battery status indicator
- Dual rear LEDs - FireBox only
- IPX4-rated; water-resistant; 1m impact resistance tested



| Description | Orange | Yellow |
|---|--------|--------|
| E-Spot LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack | 45851 | 45871 |
| E-Spot LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap | 45855 | 45875 |
| E-Spot LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack Features "Smart" power failure circuitry which automatically illuminates the light when the power is lost. | 45857 | -- |
| E-Spot LiteBox - Light Only | 45856 | 45876 |
| E-Spot FireBox - 120V AC/12V DC - Includes shoulder strap and mounting rack | 45861 | --- |
| E-Spot FireBox Vehicle Mount System - 12V DC - Includes shoulder strap | 45865 | --- |
| E-Spot FireBox - Light Only | 45862 | --- |

| Size and Weight | Battery |
|------------------------------------|-------------|
| 11.2" (28.4 cm); 3.1 lbs (1.389kg) | Lithium-ion |

NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



FIRE VULCAN® LED



Lightweight lantern with two ultra-bright blue taillight LEDs that floats

- Bright beam reaches long distances while still providing optimum peripheral illumination
- Toggle switch - easy to use with gloves
- Recharges in 5 hours

| WHITE LED | HIGH | LOW |
|-----------|---------|--------|
| LUMENS | 180 | 80 |
| CANDELA | 100,000 | 45,000 |
| DISTANCE | 662m | 424m |
| RUN TIME | 5 hrs | 10 hrs |



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T4

NFPA

Charging rack meets requirements
of NFPA 1900-11.1.11.2 (2024)
mounted in any position

| Description | Item # |
|--|--------|
| Fire Vulcan LED - Standard System - 120V/100V AC/12V DC - Includes shoulder strap & rack - Orange | 44450 |
| Fire Vulcan LED - Vehicle Mount System - 12V DC - Includes direct wire rack, shoulder strap - Orange | 44451 |
| Fire Vulcan LED (Without Charger) | 44454 |

| Size and Weight | Battery |
|----------------------------------|-------------|
| 7.5" (19.05 cm); 1.85 lbs (839g) | Lithium-ion |



H.I.D. LITEBOX®

One million candela searchlight that has the intensity and peripheral illumination to light up an entire scene

- Features a 35W, high intensity xenon lamp and a 90° swivel head
- Hand-held lantern perfect for inspecting an entire area
- Indefinite run time when plugged into a power source

| | |
|----------|-----------|
| LUMENS | 3,350 |
| CANDELA | 1,000,000 |
| DISTANCE | 663m |
| RUN TIME | 1.75 hrs |



| Description | Orange | Black |
|---|--------|-------|
| H.I.D. LiteBox - Standard System - 120V/100V AC/12V DC - Includes 10 ft (3m) 12V DC cord, shoulder strap and flood lens | 45601 | 45621 |
| H.I.D. LiteBox - Vehicle Mount System - 12V DC - Includes direct wire rack, 10 ft (3m) 12V DC cord, shoulder strap and flood lens | 45605 | --- |
| H.I.D. LiteBox - Light Only - Includes 10 ft (3m) 12V DC cord, shoulder strap and flood lens | 45600 | 45620 |

| Size and Weight | Battery |
|---------------------------------|--------------------------------|
| 14.9" (38 cm); 10.1 lbs (4.6kg) | Zero-maintenance 12V lead acid |

LANTERN ACCESSORIES

| DESCRIPTION | ITEM # | VULCAN 180 | VULCAN 180 HAZ-LO | VULCAN CLUTCH | PORTABLE SCENE LIGHT | PORTABLE SCENE LIGHT II | H.I.D. | E-FLOOD/E-SPOT LITEBOX/FIREBOX | FIRE VULCAN |
|-----------------------------------|--------|------------|-------------------|---------------|----------------------|-------------------------|--------|--------------------------------|-------------|
| H.I.D. Bulb Kit | 45637 | | | | | | ✓ | | |
| Flood Lens | 45657 | | | | | | ✓ | | |
| IR Filter | 45654 | | | | | | ✓ | | |
| Quick Release Strap | 44050 | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ |
| Heavy City Strap | 45232 | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ |
| Heavy Duty Strap w/Carabiner Lock | 45677 | | | | ✓ | | | | |
| Standard Mounting Rack - Orange | 45070 | | | | | | ✓ | ✓ | |
| Vehicle Mounting Rack - Orange | 45071 | | | | | | ✓ | ✓ | |
| Vehicle Mounting Rack - Yellow | 45074 | | | | | | | ✓ | |
| Standard Mounting Rack - Black | 45075 | | | | | | ✓ | | |
| Vehicle Mounting Rack - Black | 45076 | | | | | | ✓ | | |
| Standard Charging Rack - Black | 44103 | | | | | | | | ✓ |
| Vehicle Mounting Rack - Black | 44132 | | | | | | | | ✓ |
| Standard Charging Rack - Black | 44350 | ✓ | ✓ | ✓ | | | | | |

**Images of accessories on next page

LANTERN ACCESSORIES

| DESCRIPTION | ITEM # | VULCAN 180 | VULCAN 180 HAZ-LO | VULCAN CLUTCH | PORTABLE SCENE LIGHT | PORTABLE SCENE LIGHT II | H.I.D. | E-FLOOD/E-SPOT LITEBOX/FIREBOX | FIRE VULCAN |
|---------------------------------------|--------|------------|-------------------|---------------|----------------------|-------------------------|--------|--------------------------------|-------------|
| Direct Wire 12V DC Charge Kit - Black | 44306 | ✓ | ✓ | ✓ | | | | | |
| 12V DC (Car Socket) Charge Cord | 22051 | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ |
| 12V DC2 Charge Cord | 22050 | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ |
| 12V DC Charge Cord (10') | 22056 | | | | ✓ | ✓ | ✓ | | |
| 120V AC Charge Cord | 22060 | ✓ | ✓ | ✓ | | | | ✓ | ✓ |
| 120V AC Charge Cord | 22085 | | | | | | ✓ | | |
| Power Supply | 22083 | | | | ✓ | ✓ | | | |
| 120V AC Charge Cord | 22074 | | | | ✓ | ✓ | | | |
| Battery (Sealed Lead Acid) | 45630 | | | | ✓ | | ✓ | | |
| Battery (Lithium-ion) | 44366 | | | ✓ | | | | | |
| Battery (Lithium-ion) | 45938 | | | | | | | ✓ | |
| Battery (Lithium-ion) | 44610 | | | | | | | | ✓ |
| Battery (Lithium-ion) | 44351 | ✓ | | | | | | | |
| Battery (Lithium-ion) | 44353 | | ✓ | | | | | | |
| Battery (Lithium-ion) | 46005 | | | | | | ✓ | | |





WAYPOINT® SERIES

WAYPOINT® 400



Rechargeable spotlight for long range targeting

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours

| Description | Item # |
|---------------------------------|--------|
| Waypoint 400 - 120V AC - Yellow | 44910 |
| Waypoint 400 - 120V AC - Black | 44911 |

| | HIGH | MEDIUM | LOW |
|----------|----------|---------|--------|
| LUMENS | 1,400 | 600 | 38 |
| CANDELA | 400,000 | 165,000 | 10,000 |
| DISTANCE | 1,265m | 812m | 200m |
| RUN TIME | 3.25 hrs | 7.5 hrs | 84 hrs |

| Size and Weight | Battery |
|-----------------------------------|-------------|
| 6.75" (17.15 cm); 1.52 lbs (691g) | Lithium-ion |



WAYPOINT®



Alkaline powered spotlight for long range targeting

- Long distance, ultra-bright beam
- Integrated stand for hands-free lighting (as shown in image below)
- 12V DC power cord for unlimited run time (not a charge cord)

| Description | Item # |
|---|--------|
| Waypoint - Includes 12V DC power cord - Yellow | 44900 |
| Waypoint - Includes 12V DC power cord - Black | 44902 |
| Waypoint - Includes 12V DC power cord - Clam - Yellow | 44904 |
| Waypoint - Includes 12V DC power cord - Clam - Black | 44905 |

| Size and Weight | Battery |
|----------------------------------|--------------------------------|
| 6.75" (17.15 cm); 1.8 lbs (816g) | (4) C batteries (not included) |

| | HIGH | LOW |
|----------|---------|--------|
| LUMENS | 550 | 40 |
| CANDELA | 100,000 | 7,900 |
| DISTANCE | 625m | 178m |
| RUN TIME | 10 hrs | 82 hrs |

12V DC Power Cord - Unlimited run time
Emergency Signal - Runs 82 hours



WAYPOINT® ACCESSORIES

| DESCRIPTION | ITEM # | WAYPOINT 400 | WAYPOINT |
|-----------------------|--------|--------------|----------|
| Polymer Storage Mount | 44918 | ✓ | |
| Polymer Storage Mount | 44908 | | ✓ |
| 120V AC Charge Cord | 44909 | ✓ | |
| 12V AC Power Cord | 44923 | ✓ | |
| 12V AC Power Cord | 44903 | | ✓ |
| Red Filter | 44924 | | ✓ |
| Green Filter | 44925 | | ✓ |
| Red Filter | 44915 | ✓ | |
| Green Filter | 44916 | ✓ | |



44909



44923



44903



44918, 44908



44915, 44916



44924, 44925



SIEGE® SERIES

SUPER SIEGE®



Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on with battery status indicator
- Rechargeable - charges in 7 hours
- Auxiliary charger charges portable devices
- Glare Guard™ will shield light from behind for up-close task lighting

| WHITE | HIGH | MEDIUM | LOW |
|----------|----------|----------|-----------|
| LUMENS | 1,100 | 550 | 125 |
| RUN TIME | 5.75 hrs | 11.5 hrs | 36.25 hrs |
| RED | HIGH | SOS | LOW |
| LUMENS | 2.7 | 2.7 | 1 |
| RUN TIME | 140 hrs | 320 hrs | 348 hrs |



A small dry storage area is provided in the light's base



1100
LUMENS

| Description | Item # |
|--------------------------------|--------|
| Super Siege - 120V AC - Coyote | 44947 |
| Super Siege - 120V AC - Yellow | 44945 |

| Size and Weight | Battery |
|---------------------------------------|-------------|
| 7.5" (19.05 cm); 1 lb 14 oz (867.62g) | Lithium-ion |

THE SIEGE®



Compact, alkaline battery powered hand lantern with ergonomic handle

- Spring loaded D-rings for hanging
- Battery indicator in switch
- Three white light settings, a red light for softer light and an SOS mode



| WHITE | HIGH | MEDIUM | LOW |
|----------|---------|---------|---------|
| LUMENS | 540 | 275 | 55 |
| RUN TIME | 30 hrs | 70 hrs | 295 hrs |
| RED | HIGH | SOS | |
| LUMENS | 10 | 10 | |
| RUN TIME | 235 hrs | 430 hrs | |

SIEGE® AA



A rugged, compact lantern for when you need a lot of light without taking up a lot of space

- One white LED and two red LEDs; five output modes
- Spring loaded D-rings for hanging and ergonomic handle
- Battery indicator in switch



Features rugged carry handle and D-rings for hanging



| WHITE | HIGH | MEDIUM | LOW |
|----------|---------|----------|--------|
| LUMENS | 200 | 100 | 50 |
| RUN TIME | 7 hrs | 15.5 hrs | 37 hrs |
| RED | HIGH | SOS | |
| LUMENS | 0.7 | 0.7 | |
| RUN TIME | 192 hrs | 288 hrs | |

| Description | Item # |
|--------------------|--------|
| The Siege - Coyote | 44931 |

| Size and Weight | Battery |
|--|-----------------|
| 7.25" (18.41 cm); 1 lb 15 oz (878.83g) | (3) D batteries |

| Description | Item # |
|--------------------------------------|--------|
| Siege AA - Coyote | 44941 |
| Siege AA - Yellow with Magnetic Base | 44943 |

| Size and Weight | Battery |
|---|---------------------------|
| 5.44" (13.82 cm); 8.8 oz (249.47g) // 9.1 oz (257.98g) with Magnetic base | (3) AA alkaline batteries |

SIEGE® ACCESSORIES

| DESCRIPTION | ITEM # | SUPER SIEGE | THE SIEGE | SIEGE AA |
|----------------------------------|--------|-------------|-----------|----------|
| Glare Guard™ | 44950 | ✓ | ✓ | |
| Magnetic Accessory Base - Coyote | 44942 | | | ✓ |
| Magnetic Accessory Base - Black | 44951 | ✓ | | |
| Magnetic Accessory Base - Black | 44952 | | ✓ | |
| 120V AC Charge Cord | 44909 | ✓ | | |



44950



44942



44951



44952



44909

SURVIVOR® SERIES

SURVIVOR® X

Right angle, lightweight, low profile flashlight, that won't interfere with your gear

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

| Description | Orange | Yellow |
|----------------------------------|--------|--------|
| Survivor X - 120V/100V AC/12V DC | 90952 | 90962 |
| Survivor X - Alkaline | 90950 | 90960 |

Note: The Survivor X is not compatible with legacy Survivor chargers.

| Size and Weight | Battery |
|--|---|
| 7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g) | Rechargeable lithium-ion battery pack or (3) AA alkaline |



IP67

| | HIGH | LOW |
|-------------------|----------|--------|
| LUMENS | 250 | 60 |
| CANDELA | 50,000 | 14,000 |
| DISTANCE | 447m | 237m |
| RUN TIME Lithium | 3.75 hrs | 15 hrs |
| RUN TIME Alkaline | 5 hrs | 15 hrs |

Flash runs 8 hours

NFPA

Charging rack meets requirements of
NFPA 1900-11.1.11.2 (2024) mounted
in any position



NFPA

Flashlight meets 500°F requirements
of NFPA 1970-14.2 (2025)

SURVIVOR® X USB

USB rechargeable, right-angle flashlight

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

NFPA
Charging rack meets requirements
of NFPA 1900-11.1.11.2 (2024)
mounted in any position

NFPA
Flashlight meets 500°F requirements
of NFPA 1970-14.2 (2025)



Class I, II, Div. 2, Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4

| | HIGH | LOW |
|-------------------|--------|--------|
| LUMENS | 250 | 60 |
| CANDELA | 50,000 | 14,000 |
| DISTANCE | 447m | 237m |
| RUN TIME SL-B26 | 4 hrs | 15 hrs |
| RUN TIME Alkaline | 5 hrs | 15 hrs |

Flash runs 8 hours



| Description | Orange | Yellow |
|---|--------|--------|
| Survivor X USB - Includes (1) SL-B26 battery pack | 90044 | 90244 |

Note: The Survivor X is not compatible with legacy Survivor chargers.

| Size and Weight | Battery |
|---|---|
| 7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // SL-B26: 11.9 oz (337g) | SL-B26 battery pack or (3) AA alkaline |

SURVIVOR®



Extremely durable right angle flashlight

- Push button switch for easy operation
- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes including high, low, flash, and moonlight
- Features a D-ring for forward hanging orientation and a spring loaded clip that grabs onto your gear

| | HIGH | LOW |
|---|---------|--------|
| LUMENS | 175 | 60 |
| CANDELA | 41,000 | 14,000 |
| DISTANCE | 405m | 237m |
| RUN TIME NiMH | 3.5 hrs | 13 hrs |
| RUN TIME Alkaline | 4 hrs | 15 hrs |
| Moonlight mode runs 20 days // Flash runs 8 hours | | |



| Description | Orange | Yellow | Black |
|----------------------------|--------|--------|-------|
| Survivor - 120V AC/12V DC | 90503 | 90513 | 90523 |
| Survivor - Without Charger | 90500 | 90510 | 90520 |
| Survivor - Alkaline | 90540 | 90541 | 90545 |

| Size and Weight | Battery |
|---|--|
| 7.06" (17.92 cm); Alkaline: 13.7 oz (388g) NiMH: 18 oz (510g) | Rechargeable NiMH battery pack; also accepts (4) AA Alkaline batteries |



Class I, II, Div. 1, Groups C, D, E, F, G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T-Code: T4

NFPA

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

NFPA
Flashlight meets 500°F requirements
of NFPA 1970-14.2 (2025)



Permissible Flashlight,
Approval No. 20-A150001-0
(Alkaline model)

SURVIVOR PIVOT® // SURVIVOR PIVOT® USB



Multi-function, dual-beam flashlight with a 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



| | SPOT | | FLOOD | | COMBO | |
|--------------------------|----------|--------|----------|--------|----------|--------|
| | HIGH | LOW | HIGH | LOW | HIGH | LOW |
| LUMENS | 300 | 70 | 300 | 70 | 325 | 80 |
| CANDELA | 34,000 | 8,500 | 300 | 75 | 19,000 | 5,000 |
| DISTANCE | 369m | 184m | 35m | 17m | 276m | 141m |
| RUN TIME Lithium | 4.25 hrs | 16 hrs | 4.25 hrs | 16 hrs | 3.75 hrs | 13 hrs |
| RUN TIME Alkaline | 5.5 hrs | 15 hrs | 5.5 hrs | 15 hrs | 4.5 hrs | 12 hrs |



Survivor Pivot Safety Ratings



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T3/T4

Survivor Pivot USB Safety Ratings



NFPA

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Class I, II, Div. 2,
Grps. A, B, C, D, F, G;
Class III, T-Code: T4

| Description | Orange | Yellow |
|---|--------|--------|
| Survivor Pivot - 120V/100V AC/12V DC | 91802 | 91812 |
| Survivor Pivot - Alkaline - Includes battery carrier | 91800 | 91810 |
| Survivor Pivot Magnet - 120V/100V AC/12V DC | 91830 | 91831 |
| Survivor Pivot Magnet - Alkaline - Includes battery carrier | 91825 | 91826 |

| Description | Orange | Yellow |
|--|--------|--------|
| Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier | 91804 | 91814 |
| Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier | 91838 | 91839 |

Size and Weight

7.93" (20.14 cm);
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) w/MAGNET

USB Model: 7.93" (20.14 cm)
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

Rechargeable lithium-ion battery pack, SL-B26 or (3) AA alkaline

Note: The Survivor Pivot® is not compatible with legacy Survivor chargers



Strong spring-loaded clip securely grabs onto jackets and gear; D-ring provides forward hanging orientation




Optional magnet

SURVIVOR® ACCESSORIES

| DESCRIPTION | ITEM # | SURVIVOR | SURVIVOR X | SURVIVOR X USB | SURVIVOR PIVOT | SURVIVOR PIVOT USB |
|---------------------------------|--------|----------|------------|----------------|----------------|--------------------|
| 5 Unit 120V AC Bank Charger | 90910 | ✓ | ✓ | | ✓ | |
| 5 Unit 12V AC Bank Charger | 90912 | ✓ | ✓ | | ✓ | |
| 120V AC Charge Cord | 22060 | | | | | |
| 12V DC2 Charge Cord | 22050 | | | | | |
| 12V DC2 Charge Cord | 22051 | | | | | |
| Charge Holder | 90345 | ✓ | ✓ | | ✓ | |
| Lithium-ion Battery - C1D1 | 90341 | | ✓ | | ✓ | |
| Alkaline/SL-B26 Battery Carrier | 90342 | | ✓ | ✓ | ✓ | ✓ |
| Alkaline Battery Cartridge | 90542 | ✓ | | | | |
| NiMH Battery | 90339 | ✓ | | | | |
| SL-B26 Battery Pack - 1pk | 22101 | | | | ✓ | ✓ |



90910, 90912



22060



22050



22051



90345



90341



90342



22101



90339



90542





VANTAGE® SERIES

| Description | Item # |
|--|--------|
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Orange | 88911 |
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Black | 88913 |
| Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Orange | 88901 |
| Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Black | 88903 |

| Size and Weight | Battery |
|--|---|
| 5.2" (13.2 cm); SL-B26: 5.9 oz (167g) // CR123A: 5.5 oz (156g) | (1) SL-B26 battery pack or (2) CR123A lithium |

VANTAGE® 180 X



Multi-fuel, right-angle flashlight

- Versatile - three lights in one - mount it to your helmet, attach it to your turn out gear or use as a handheld flashlight
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

| | HIGH | LOW |
|----------|-------|--------|
| LUMENS | 250 | 100 |
| CANDELA | 7,200 | 2,650 |
| DISTANCE | 170m | 103m |
| RUN TIME | 5 hrs | 15 hrs |



NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



VANTAGE®



Compact, powerful, shock-proof, and virtually indestructible helmet light

- Attaches easily to helmets and hard hats, no tools necessary
- Fits both traditional and modern helmets
- Features a bright, blue taillight LED to be seen from behind even in heavy smoke

| LUMENS | 115 |
|----------|-------|
| CANDELA | 7,000 |
| DISTANCE | 167m |
| RUN TIME | 6 hrs |

| Description | Item # |
|---|--------|
| Vantage - Includes (2) CR123A lithium batteries - Black | 69140 |

| Size and Weight | Battery |
|-----------------------------------|--------------------|
| 3.26" (8.28 cm); 5.14 oz (145.7g) | (2) CR123A lithium |



Dual direction, easy access on/off switch



NFPA Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

CE Meets applicable European Community Directives

VANTAGE® II



Compact, low-profile helmet light designed to easily attach above or below brim of fire helmets

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be seen from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

| | HIGH | LOW |
|----------|----------|-------|
| LUMENS | 350 | 135 |
| CANDELA | 3,500 | 1,700 |
| DISTANCE | 118m | 80m |
| RUN TIME | 2.25 hrs | 5 hrs |



Fire model



Industrial model



*fits in accessory slot of standard hard hats

| Description | Item # |
|---|--------|
| Vantage II - Fire - Includes (1) CR123A lithium battery - Black | 69331 |
| Vantage II - Industrial - Includes (1) CR123A lithium battery - Black | 69333 |
| Vantage II - for MSA Cairns® 1010/1044 Traditional Fire Helmets - Includes (1) CR123A lithium battery - Black | 69337 |
| Bracket Kit - Fire | 69334 |
| Bracket Kit - Industrial | 69336 |
| Bracket Kit - for MSA Cairns® 1010/1044 Traditional Fire Helmets | 69339 |

All right reserved. Cairns® is a registered trademark of the Cairns Trademark Trust.

| Size and Weight | Battery |
|--|--------------------|
| 2.37" (6.02 cm); Industrial Mount: 2.97 oz (84.2g) // Fire Mount: 3.65 oz (103.5g) | (1) CR123A lithium |

NFPA Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

CE Meets applicable European Community Directives





STREAMLIGHT SAFETY-RATED LIGHTING TOOLS

// DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS

The National Electric Code (NEC) defines hazardous locations by "class" and "division." There are three classes:



CLASS I locations are made hazardous by the presence of flammable gases, liquids or vapors.



CLASS II locations are hazardous because combustible dusts are present.



CLASS III locations contain easily ignitable fibers or flyings.

The "Division" designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:




DIVISION 1 designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



DIVISION 2 locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by "groups" based on the physical properties of their combustible materials. These groups include (but are not limited to):



- GROUP A** Acetylene
- GROUP B** Hydrogen
- GROUP C** Ethylene, Carbon Monoxide
- GROUP D** Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



- GROUP E** Metals including aluminum, magnesium (Div. 1 only)
- GROUP F** Carbonaceous dusts including coal, carbon black, coke
- GROUP G** Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



STREAMLIGHT GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and certified by the world's leading independent laboratories - including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.

NFPA®



// STREAMLIGHT'S HAZ-LO SERIES OF LIGHTING TOOLS PROVIDE DIFFERENT PATHS TO THE SAME RESULT: A DIVISION 1 RATING!

When working in a Division 1 area, we expect explosive atmospheres to be present. Streamlight's HAZ-LO product line is suitable for use in Division 1 areas. Streamlight uses different protection standards and testing at Nationally Recognized Test Labs (NRTL) to achieve the Division 1 rating that is common to all Streamlight HAZ-LO Lighting. This is the best possible performance while ensuring that your flashlight will not become an ignition source. ANSI/UL 783 is the specific standard for flashlights used in hazardous locations. ANSI/UL 913 is the intrinsically safe standard for general electronic equipment. While either standard can direct certification to Division 1 level, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.



Scan or click to watch our video:
"You Bet Your Light On It:
Safety Ratings Explained"

// WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use any light that has not been specifically designed — and approved — for that kind of location. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you will be using a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific kind of environment.

// ATEX RATINGS

Streamlight also offers safety-rated lights that comply with the European Union (EU) Directive 2014/34/EU (ATEX) for products intended for use in potentially explosive atmospheres within the EU member countries. Please visit our website, streamlight.com for more information on ATEX-rated products. We also have a catalog of ATEX-rated products available upon request.



DUALIE® AND PROPOLYMER® SERIES

DUALIE® RECHARGEABLE

Rechargeable, multi-function flashlight with dual beams

- Recharges in 8 hours
- Spot, flood and combo modes
- Durable, non conductive non-corrosive polymer construction
- Mount virtually anywhere with charge holder

| | SPOT | FLOOD | COMBO |
|----------|----------|----------|---------|
| LUMENS | 180 | 105 | 275 |
| CANDELA | 11,500 | 60 | -- |
| DISTANCE | 171m | 18m | -- |
| RUN TIME | 7.25 hrs | 13.5 hrs | 5.5 hrs |

| Description | Item # |
|--|--------|
| Dualie Rechargeable - 120V/100V AC - Yellow | 68732 |
| Dualie Rechargeable - 120V/100V AC - Black | 68733 |
| Dualie Rechargeable - Light Only - Yellow | 68730 |
| Dualie Rechargeable - Light Only - Black | 68731 |
| Dualie Rechargeable - Magnet - 120V/100V AC - Yellow | 68793 |
| Dualie Rechargeable - Magnet - 120V/100V AC - Black | 68794 |
| Dualie Rechargeable - Magnet - Light Only - Yellow | 68785 |
| Dualie Rechargeable - Magnet - Light Only - Black | 68786 |

| Size and Weight | Battery |
|--|-------------|
| 7" (17.78 cm); 6.8 oz (193g) // Magnet: 7.5" (19.05 cm); 7.09 oz (201g) | Lithium-ion |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4



Permissible Flashlight
App. No. 20-A16001-0
Tested for use in methane-air
mixtures only

DUALIE® 3AA

Features two LEDs and three lighting modes: spot, flood, spot and flood combo with optional integrated magnet for hands-free use

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Snag free pocket clip with optional magnet

| | SPOT | FLOOD | COMBO |
|-----------------|--------|--------|-------|
| LUMENS | 140 | 140 | 245 |
| CANDELA | 7,300 | 80 | --- |
| DISTANCE | 171m | 8m | --- |
| RUN TIME | 18 hrs | 18 hrs | 9 hrs |

| Description | Item # |
|---|--------|
| Dualie 3AA - Includes (3) AA alkaline batteries - Yellow | 68750 |
| Dualie 3AA - Includes (3) AA alkaline batteries - Black | 68752 |
| Dualie 3AA - batteries not included - Mailer - Yellow | 68751 |
| Dualie 3AA - batteries not included - Mailer - Black | 68753 |
| Dualie 3AA Magnet - Includes (3) AA alkaline batteries and lanyard - Yellow | 68782 |
| Dualie 3AA Magnet - Includes (3) AA alkaline batteries and lanyard - Black | 68783 |
| Dualie 3AA Magnet - batteries not included - Mailer - Yellow | 68780 |
| Dualie 3AA Magnet - batteries not included - Mailer - Black | 68781 |

| Size and Weight | Battery |
|--|-----------------|
| 7" (17.78 cm); 6.8 oz (193g) // Magnet: 7.1 oz (201g) | (3) AA alkaline |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air
mixtures only

DUALIE® 3AA LASER

Intrinsically safe, high performance battery powered flashlight with laser

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation
- Snag free pocket clip

| | LED | LASER |
|-----------------|--------|-------------|
| LUMENS | 150 | <5mW output |
| CANDELA | 7,700 | --- |
| DISTANCE | 175m | --- |
| RUN TIME | 17 hrs | 70 hrs |

| Description | Item # |
|--|--------|
| Dualie 3AA Laser - Includes (3) AA alkaline batteries - Yellow | 68760 |
| Dualie 3AA Laser - Includes (3) AA alkaline batteries - Black | 68762 |

| Size and Weight | Battery |
|------------------------------|-----------------|
| 7" (17.78 cm); 6.8 oz (193g) | (3) AA alkaline |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4



Permissible Flashlight
App. No. 20-A160001-0
Tested for use in methane-air
mixtures only

DUALIE® 3AA COLOR-RITE®

Multi-function, AA flashlight with Color-Rite Technology®

- Flood beam uses a high CRI LED for true color recognition
- Produces a soft, wide beam to illuminate your work area
- Chemical resistant, corrosion proof
- Snag free pocket clip



| | SPOT (COOL WHITE) | FLOOD (WARM WHITE) | COMBO |
|----------|----------------------|-----------------------|-------|
| LUMENS | 225 | 175 | 320 |
| CANDELA | 8,000 | 380 | 7,000 |
| DISTANCE | 179m | 39m | 167m |
| RUN TIME | 8 hrs | 8.5 hrs | 5 hrs |

Color Temperature: 4,000k



Color-Rite®



Class I, II; Div. I
Grps. A, B, C, D, E, F, G
Class III, T-Code: T4

| Description | Item # |
|---|--------|
| Dualie 3AA Color-Rite - Includes (3) AA alkaline batteries - Yellow | 68910 |

| Size and Weight | Battery |
|------------------------------|-----------------|
| 7" (17.78 cm); 6.6 oz (187g) | (3) AA alkaline |

DUALIE® 2AA

Dual beam, compact, C1D1 battery operated flashlight

- Spot and flood LED options
- Integrated magnet for hands-free use

| Description | Item # |
|---|--------|
| Dualie 2AA - Includes (2) AA alkaline batteries - Clam - Yellow | 67750 |
| Dualie 2AA - Includes (2) AA alkaline batteries - Box - Yellow | 67751 |

| Size and Weight | Battery |
|-------------------------------|-----------------|
| 6.1" (15.5 cm); 3.9 oz (111g) | (2) AA alkaline |



| | SPOT | FLOOD | COMBO |
|----------|--------|--------|--------|
| LUMENS | 115 | 115 | 175 |
| CANDELA | 3,100 | 75 | --- |
| DISTANCE | 111m | 17m | --- |
| RUN TIME | 24 hrs | 24 hrs | 15 hrs |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T4

STYLUS PRO® HAZ-LO®

Intrinsically safe, durable, alkaline penlight

- Features a tail switch with momentary and constant on operation
- Chemical-resistant polymer construction



| | |
|----------|----------|
| LUMENS | 105 |
| CANDELA | 380 |
| DISTANCE | 39m |
| RUN TIME | 2.25 hrs |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III, T-Code: T3/T4

| Description | Item # |
|---|--------|
| Stylus Pro HAZ-LO - Includes (2) AA alkaline batteries - Yellow | 66300 |

| Size and Weight | Battery |
|-------------------------------|-----------------|
| 5.92" (15 cm); 1.9 oz (53.9g) | (2) AA alkaline |





2AA PROPOLYMER® HAZ-LO®

Virtually indestructible safety-rated flashlight

- Long run time
- Provides a focused beam with optimum peripheral illumination
- Fits in your pocket or strap it to a helmet using Poly Mount Kit (see page 53)

| Description | Item # |
|--|--------|
| 2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Black | 67100 |
| 2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Yellow | 67101 |

| Size and Weight | Battery |
|--------------------------------|-----------------|
| 6.4" (16.26 cm); 3.6 oz (100g) | (2) AA alkaline |

| | |
|----------|--------|
| LUMENS | 65 |
| CANDELA | 2,300 |
| DISTANCE | 96m |
| RUN TIME | 24 hrs |



Permissible Flashlight.
Approval No. 20-A140002-0.
Tested for Intrinsic Safety in Methane-Air mixtures only.



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III; T-Class: T4

2AAA PROPOLYMER® HAZ-LO®

General purpose, handheld (about the size of a marker), intrinsically-safe flashlight

- Push-button tailswitch for momentary on or on/off operation
- Extremely durable with super tough nylon housing
- Integrated pocket clip

| Description | Item # |
|---|--------|
| 2AAA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Yellow | 66500 |
| 2AAA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Box - Yellow | 66505 |

| Size and Weight | Battery |
|------------------------------|------------------|
| 5.4" (13.7 cm); 1.9 oz (54g) | (2) AAA alkaline |

| | |
|----------|--------|
| LUMENS | 60 |
| CANDELA | 800 |
| DISTANCE | 57m |
| RUN TIME | 16 hrs |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G;
Class III; CL I, ZN O, IIC;
T-Class: T4A



4AA PROPOLYMER® LUX



Safety-rated, long-reaching, flashlight

- Ergonomic design for comfortable handling
- Unbreakable, scratch resistant lens
- Durable, non-conductive polymer

| | |
|----------|--------|
| LUMENS | 200 |
| CANDELA | 12,000 |
| DISTANCE | 219m |
| RUN TIME | 6 hrs |



4AA Lux Div. 1

Class I, II, Div. 1, Grps. C, D, F, G;
Class I, Div. 2, Grps. A, B, C, D;
Class III, T-Code: T4

4AA Lux Div. 2

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

| Description | Black | Yellow |
|--|-------|--------|
| 4AA ProPolymer Lux Div. 2 - Includes (4) AA alkaline batteries | 68344 | 68244 |
| 4AA ProPolymer Lux Div. 1 - Includes (4) AA alkaline batteries | 68702 | 68602 |

| Size and Weight | Battery |
|-----------------------------|-----------------|
| 7" (17.8 cm); 7.2 oz (204g) | (4) AA alkaline |

4AA PROPOLYMER® LED



Intrinsically safe flashlight producing a soft flood light

- Seven LEDs produce soft diffused light
- Perfect light for up close work
- Unbreakable, scratch resistant lens

| | |
|----------|---------|
| LUMENS | 67 |
| RUN TIME | 155 hrs |



Class I, Div. 1, Grps. C, D;
Class I, Div 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only

| Description | Black | Yellow |
|--|-------|--------|
| 4AA ProPolymer LED - batteries not included | 68300 | 68200 |
| 4AA ProPolymer LED - Includes (4) AA alkaline batteries - Box | 68301 | 68201 |
| 4AA ProPolymer LED - Includes (4) AA alkaline batteries - Clam | 68302 | 68202 |

| Size and Weight | Battery |
|----------------------------------|-----------------|
| 6.5" (16.51 cm); 6.3 oz (178.6g) | (4) AA alkaline |

POLY MOUNT KIT

"No tools required" kit to easily attach your flashlight to your hard hat

- Attaches to a variety of helmets and Streamlight lights (listed below) for hands-free use
- Adjustable so you can aim the light where you need it



Poly Mount Kit includes:

Adhesive base to attach to side of hard hat

Mounting base that slides into the slot of hard hat

Bands for:

Dualie® 2AA
Dualie® 3AA
Dualie® Rechargeable
2AA ProPolymer® HAZ-LO®
4AA ProPolymer® Lux
PolyTac®/ PolyTac® X

| Description | Item # |
|----------------|--------|
| Poly Mount Kit | 68089 |



Shown with Dualie 2AA (not included)
using adhesive base



Shown with Dualie 2AA (not included)
using slot attachment

DUALIE® AND PROPOLYMER® ACCESSORIES

| DESCRIPTION | ITEM # | DUALIE 2AA | DUALIE 3AA/ 3AA LASER | DUALIE RECHARGEABLE | 2AA PROPOLYMER HAZ-LO | 4AA PROPOLYMER LUX | STYLUS PRO HAZ-LO |
|------------------------------|--------|------------|--------------------------|------------------------|--------------------------|-----------------------|----------------------|
| Charge Holder | 68790 | | | ✓ | | | |
| 6 Unit Bank Charger | 68789 | | | ✓ | | | |
| Lithium-ion Battery | 68792 | | | ✓ | | | |
| 120V AC USB Cord | 22071 | | | ✓ | | | |
| 12V USB Cord | 22080 | | | ✓ | | | |
| Nylon Holster | 66029 | | | | | | ✓ |
| Helmet Mount | 68085 | | ✓ | ✓ | | | |
| Metal Clip | 66301 | | | | | | ✓ |
| Poly Mount Kit | 68089 | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Tailcap Assembly | 66302 | | | | | | ✓ |
| Rubber Helmet Band | 99075 | | | | ✓ | ✓ | |
| Red Safety Wand | 74903 | | | | ✓ | | |
| Yellow Safety Wand | 74904 | | | | ✓ | | |
| Glow in the Dark Safety Wand | 74913 | | | | ✓ | | |



68790



68789



68792



22071



22080



66029



66301



66302



68085



68089



99075



74903, 74904, 74913

LIGHT ONLY

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-1® HP



TLR-1® HP-X



TLR-1 HL®



TLR-1 HL®-X



TLR-1® // TLR-1®s

NEW



TLR-3®X

UPGRADED



TLR-7® X

UPGRADED



TLR-7® X Contour Remote

UPGRADED



TLR-7® HL-X



TLR-9®

SUBCOMPACT PISTOLS

TRIGGER GUARD AND RAIL MOUNT MODELS

NEW



TLR-3®X

UPGRADED



TLR-6® Non-Laser

UPGRADED



TLR-7® X sub



TLR-7® HL-X sub

LONG GUN/AR

SHOTGUN FOREND AND RAIL MOUNT MODELS



TL-Racker®



TLR® RM 1



TLR® RM 1 HL-X



TLR® RM 2

NEW



ProTac®
Rail Mount 1L-X //
Rail Mount 1L-X Pro



ProTac®
Rail Mount 1



ProTac®
Rail Mount 2



ProTac® Rail Mount
HL-X



ProTac® Rail Mount
HL-X Pro



ProTac® Rail Mount
HP-X Pro



ProTac® 2.0
Rail Mount



ProTac® 2.0
Rail Mount HP



TLR-1 HL®
(Long Gun Kit)



TLR-1® HP
(Long Gun Kit)



TLR-1 HPL®
(Long Gun Kit)

LIGHT/LASER COMBO

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2 HL®



TLR-2® G // TLR-2 HL® G



TLR-4® // TLR-4® G



TLR-8® HL-X // TLR-8® HL-X G



TLR-8® X // TLR-8® X G



TLR-10® // TLR-10® G

SUBCOMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS



TLR-6®



TLR-6 HL® //
TLR-6 HL® G



TLR-8® X //
TLR-8® X G



TLR-8® X sub //
TLR-8® X G sub



TLR-8® HL-X sub //
TLR-8® HL-X G sub



TLR-8® HL-X sub //
TLR-8® HL-X G sub

LONG GUN/AR

SHOTGUN FOREND AND RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2 HL®



TLR-2 HL® G



TLR® RM 1 Laser
Red // Green



TLR® RM 2 Laser
Red // Green



ProTac® Rail Mount
HL-XLaser

SPECIALTY/IR

LONG GUN/AR & FULL FRAME PISTOLS

NEW



ProTac®
Rail Mount VIR Pro



TLR-VIR® II




It can be difficult to choose the right weapon-mounted light for your specific gun and application. We want to make the process easier. That's why we designed the TLR Fit Guide to make it easy for you to select the right light for your weapon.

SCAN OR CLICK THE QR CODE TO VIEW OUR TLR FIT GUIDE

Beam Patterns Explained

Choosing the best gun light means pairing the right beam with your needs. Streamlight's range of gun lights offers Traditional, High-Lumen, and High-Candela options, each designed with features tailored to different tactical applications. Whether you need wide area visibility, a powerful pinpoint beam, or a mix of both, Streamlight has a solution to keep you ready for any challenge.

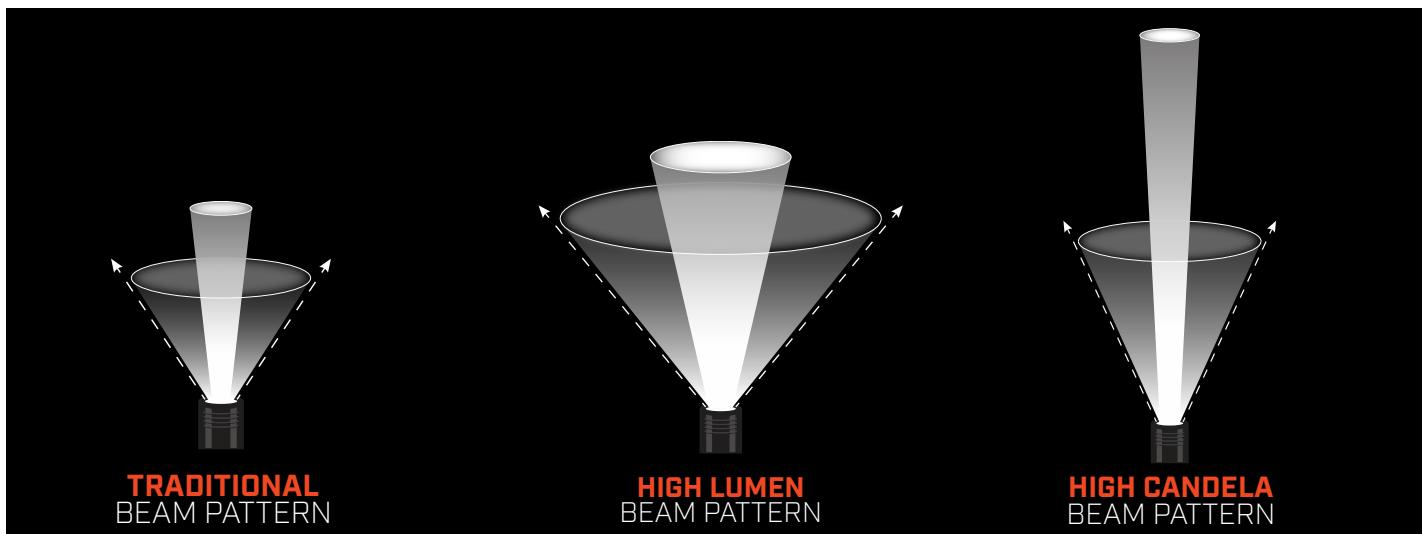

Traditional Beam Pattern: Designed for versatile, multi-purpose use, these lights offer exceptional value across a wide range of lighting needs.

| Performance Characteristics | Traditional Product |
|---|---|
| <ul style="list-style-type: none"> Optimal balance of candela and lumens - the beam pattern most people expect out of a quality flashlight Very good all-around use, broadest range of lighting applications Good focus and arc/periphery light Longest regulated run times | <ul style="list-style-type: none"> TLR-1® and TLR-1®s TLR-2® and TLR-2®s TLR-3®X TLR-4® Series TLR-6® TLR-7® X Series <ul style="list-style-type: none"> TLR-8® X Series TLR-9® TLR-10® Series ProTac® Rail Mount 1 ProTac® Rail Mount 2 |

High Lumen Beam Pattern: Delivers maximum brightness with a wide beam pattern, ensuring full situational awareness. Perfect for illuminating smaller spaces where intense light is essential without requiring long-range reach.

| Performance Characteristics | High-Lumen Product |
|---|---|
| <ul style="list-style-type: none"> High-lumen beam Maximum illumination - a broader beam pattern with a wider center spot Shorter regulated run time More glare/bounce back | <ul style="list-style-type: none"> TLR-1 HL® TLR-1 HL®-X TLR-2 HL® Series TLR-6 HL® Series TLR-7 HL-X sub <ul style="list-style-type: none"> TLR-8 HL-X sub Series ProTac® Rail Mount HL-X Series ProTac® 2.0 Rail Mount ProTac® Rail Mount 1L-X ProTac® Rail Mount VIR Pro |

High Candela Beam Pattern: Delivers powerful, long-distance beam with high-lumen output - perfect for down-range applications requiring precision and clarity.

| Performance Characteristics | High-Candela Product |
|--|---|
| <ul style="list-style-type: none"> High-candela beam Casts a wide, bright beam with a tight, focused center spot for greater down-range light More light on your target at a distance | <ul style="list-style-type: none"> TLR-1® HP TLR-1® HP-X TLR-1 HPL® TLR-7® HL-X Series TLR-8® HL-X Series <ul style="list-style-type: none"> TLR® RM 1 Series TLR® RM 2 Series ProTac® 2.0 Rail Mount HP ProTac® Rail Mount HP-X Pro |

TLR-1® EVOLUTION



STREAMLIGHT®

2006
-First Generation
-80 Lumens
-Later Upgraded to 300 Lumens

2013
-630 Lumens
-Later Upgraded to 1,000 Lumens

2024
-1,500 Lumens
-Front Loaded Batteries
-Multi-Fuel
-Paddle Switches

2025
-65,000 Candela
-Original Form Factor

2025
-77,000 Candela
-Front Loaded Batteries
-Multi-Fuel
-Paddle Switches

THEN



TLR-1®



TLR-1® HL



TLR-1 HL®-X



TLR-1® HP



TLR-1® HP-X

NOW

TLR-1 HL®

WHITE LIGHT ILLUMINATOR



Provides for maximum illumination with a wide beam pattern that lights up large areas so you can identify what is nearby

- Rail-grip clamp system securely attaches/detaches quickly and safely
- User programmable strobe for disorienting
- Unbreakable, scratch-resistant, gasket sealed lens
- Ambidextrous momentary/constant-on operation

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |

1000
LUMENS



Description

TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black

Item

69260

TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, Sig SAUER P320® and Beretta® 90-two and (2) CR123A batteries - FDE

69266

TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, Sig SAUER P320® and Beretta® 90-two and (2) CR123A batteries - FDE Brown

69267

TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A batteries - Black

69262

TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A batteries - Flat Dark Earth

69888

TLR-1 HL - Dual Remote Kit - Includes dual remote pressure switch, "safe off" door switch, mounting clips and (2) CR123A batteries - Black

69889



Battery

(2) CR123A lithium

Size and Weight

3.39" (8.61 cm); 4.32 oz (122.5g)





TLR-1 HL[®]-X

WHITE LIGHT ILLUMINATOR



Multi-fuel, high-lumen, rail-mounted light with front loading batteries

- Wide peripheral beam pattern gives you a powerful 1,500 lumen light
- Standard and extended switches
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 battery pack recharges in 2.5 hours

| | SL-B9 | CR123A |
|-----------------|--------|---------|
| LUMENS | 1,500 | 1,000 |
| CANDELA | 20,000 | 15,000 |
| DISTANCE | 283m | 245m |
| RUN TIME | 1 hr | 1.5 hrs |

1500
LUMENS



Description

| | Item # |
|---|--------|
| TLR-1 HL-X - Includes Rail Locating Keys for use with GLOCK [®] style, 1913 Picatinny, Smith & Wesson [®] 99/TSW, Sig P320 and Beretta [®] 90-two and (2) CR123A batteries - Black | 69500 |
| TLR-1 HL-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord - Black | 69501 |

Size and Weight

| | Battery |
|--|---|
| 3.45" (8.76 cm); SL-B9: 5.19 oz (147g) // CR123A: 4.94 oz (140g) | (2) SL-B9 battery packs or (2) CR123A lithium |

TLR-1® HP

WHITE LIGHT ILLUMINATOR

High-candela, gun light for both handguns and long guns

- Secure Mounting: Attaches to handguns with GLOCK®-style rails and all MIL-STD-1913 (Picatinny) rails
- Customizable strobe
- Versatile Use: optional long gun kit available for expanded compatibility

| | |
|----------|----------|
| LUMENS | 1,000 |
| CANDELA | 65,000 |
| DISTANCE | 510m |
| RUN TIME | 1.75 hrs |



Description

| | |
|---|--------------|
| TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - Black | Item # 59150 |
| TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - FDE | 59151 |
| TLR-1 HP Long Gun Kit - Includes Safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A batteries - Black | 59152 |

Size and Weight

| Size and Weight | Battery |
|-----------------------------------|------------------------------|
| 3.39" (8.61 cm); 4.32 oz (122.5g) | (2) CR123A lithium batteries |

TLR-1® HP-X

WHITE LIGHT ILLUMINATOR

Multi-fuel, high-candela, rail-mounted light with hinged facecap for quick front loading batteries

- Interchangeable Switches: Customize controls for preferred handling
- Programmable strobe
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 recharges in 2.5 hours

| | SL-B9 | CR123A |
|----------|--------|---------|
| LUMENS | 1,300 | 1,000 |
| CANDELA | 77,000 | 53,000 |
| DISTANCE | 555m | 460m |
| RUN TIME | 1 hr | 1.5 hrs |

Description

| | |
|--|--------------|
| TLR-1 HP-X - Includes Rail Locating Keys and (2) CR123A batteries - Black | Item # 69167 |
| TLR-1 HP-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord - Black | 69168 |

Size and Weight

| Size and Weight | Battery |
|---|---|
| 3.7" (9.4 cm); SL-B9: 5.43 oz (154g) // CR123A: 5.2 oz (148g) | (2) SL-B9 battery packs or (2) CR123A lithium |



TLR-1® // TLR-1®s

WHITE LIGHT ILLUMINATOR

Durable gun light that produces a concentrated beam with optimum peripheral illumination

- Available in standard or strobe models
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails



| | |
|----------|---------|
| LUMENS | 300 |
| CANDELA | 12,000 |
| DISTANCE | 219m |
| RUN TIME | 2.5 hrs |



| Description | Item # |
|---|--------|
| TLR-1 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black | 69110 |
| TLR-1s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black | 69210 |

| Size and Weight | Battery |
|-----------------------------------|--------------------|
| 3.39" (8.61 cm); 4.18 oz (118.6g) | (2) CR123A lithium |

TLR-2 HL®

WHITE LIGHT ILLUMINATOR / RED LASER

Super bright, 1000 lumen gun light with red aiming laser

- Wide peripheral beam and a 640-660nm red laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation



| | |
|--------------------------|---------|
| LUMENS | 1,000 |
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |
| Laser mode runs 45 hours | |

TLR-2 HL G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Super bright, 1000 lumen gun light with green aiming laser

- Wide peripheral beam and a 510-530nm green laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation



| | |
|--------------------------|---------|
| LUMENS | 1,000 |
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |
| Laser mode runs 17 hours | |

Description

TLR-2 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99 TSW, SIG P320 and Beretta® 90-two and (2) CR123A batteries - Black

Item

69261

Size and Weight

3.39" (8.61 cm); 4.88 oz (138.4g)

Battery

Battery

(2) CR123A lithium

TLR-2® // TLR-2®s

WHITE LIGHT ILLUMINATOR / RED LASER



IPX4

Durable gun light with red laser that securely fits a broad range of weapons

- Wide peripheral beam and a 650-660nm red laser
- Mounts directly to handguns with GLOCK® style rails and to all MIL-STD-1913 (Picatinny) rails

| | |
|----------|---------|
| LUMENS | 300 |
| CANDELA | 12,000 |
| DISTANCE | 219m |
| RUN TIME | 2.5 hrs |

Laser mode runs 48 hours



Description

Item

TLR-2 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and (2) CR123A batteries - Black

69120

TLR-2s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and (2) CR123A batteries - Black

69230

Size and Weight

Battery

3.39" (8.61 cm); 4.72 oz (133.8g)

(2) CR123A lithium

TLR-2® G

WHITE LIGHT ILLUMINATOR / GREEN LASER



IPX4

Durable gun light with green laser that can be seen even in the daylight

- Highly visible beam and a 510-530nm green laser
- User programmable strobe
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails

| | |
|----------|---------|
| LUMENS | 300 |
| CANDELA | 12,000 |
| DISTANCE | 283m |
| RUN TIME | 2.5 hrs |

Laser mode: runs 17 hours

Description

Item

TLR-2 G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-two and lithium batteries - Black

69250

Size and Weight

Battery

3.39" (8.61 cm); 4.72 oz (133.8g)

(2) CR123A lithium





TLR-3[®] X

6,500 CANDELA | MULTI-FUEL
POLYMER CONSTRUCTION
FITS SUBCOMPACT AND COMPACT HANDGUNS



NEW

TLR-3[®] X



WHITE LIGHT ILLUMINATOR

Designed for subcompact and compact handguns, offering 550 lumens and 161 meter beam distance for clear visibility

- Impact and chemical-resistant, heat-stabilized polymer construction
- Reversible jaws for compatibility across compact/sub compact pistols
- One-handed snap on tighten interface keeps hands away from muzzle when attaching and detaching

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 6,500 |
| DISTANCE | 161m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |



| Description | Item # |
|---|--------|
| TLR-3X (1913) - Includes mounting kit with keys, paddles, multi-tool and (1) CR123A lithium battery | 59100 |
| TLR-3X (1913 Slim) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery | 59102 |
| TLR-3X (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery | 59104 |
| TLR-3X USB (1913) - Includes mounting kit with keys, paddles, multi-tool and (1) SL-B9 battery pack | 59101 |
| TLR-3X USB (1913 Slim) - Includes mounting kit with key, paddles, multi-tool, and (1) SL-B9 battery pack | 59103 |
| TLR-3X USB (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool and (1) SL-B9 battery pack | 59105 |

| Size and Weight | Battery |
|---|--|
| 2.75" (6.99 cm); SL-B9: 2.25 oz (63.8g) / CR123A: 2.15 oz (60.9g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |



TLR-4®

WHITE LIGHT ILLUMINATOR / RED LASER

Polymer rail-mounted tactical light with red laser

- Features 640-660nm red laser
- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame



TLR-4® G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Polymer rail-mounted tactical light with green laser

- Features 510-530nm green laser
- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame



| | |
|----------|---------|
| LUMENS | 170 |
| CANDELA | 3,300 |
| DISTANCE | 115m |
| RUN TIME | 1.5 hrs |

Laser mode runs 15 hours



| | |
|----------------------|----------|
| LUMENS | 160 |
| CANDELA | 3,200 |
| DISTANCE | 113m |
| RUN TIME LED | 1.75 hrs |
| RUN TIME LED + LASER | 1.25 hrs |

Laser mode runs 4 hours



| Description | Item # |
|---|--------|
| TLR-4 - Includes Rail Locating Keys and (1) CR2 lithium battery - Black | 69240 |
| TLR-4 - H&K USP Compact - Includes (1) CR2 lithium battery - Black | 69241 |
| TLR-4 - H&K USP Full-Size - Includes (1) CR2 lithium battery - Black | 69242 |

| Size and Weight | Battery |
|----------------------------------|-----------------|
| 2.73" (6.93 cm); 2.81 oz (79.7g) | (1) CR2 lithium |

| Description | Item # |
|--|--------|
| TLR-4 G - Includes Rail Locating Keys for use with Picatinny or GLOCK® style rails and (1) CR2 lithium battery - Black | 69245 |
| TLR-4 G H&K USP Compact - Includes (1) CR2 lithium battery - Black | 69246 |
| TLR-4 G H&K USP Full-Size - Includes (1) CR2 lithium battery - Black | 69247 |

| Size and Weight | Battery |
|----------------------------------|-----------------|
| 2.73" (6.93 cm); 2.81 oz (79.7g) | (1) CR2 lithium |

TLR-6®

WHITE LIGHT ILLUMINATOR / RED LASER



Designed to securely attach to a variety of subcompact handguns; features 640-660nm red laser

- Tool-less battery replacement without removal from the weapon or the need to re-sight the laser
- Ambidextrous push-button switches on either side for easy operation
- Securely attaches to the trigger guard on hand guns
- Models available without laser

| | |
|----------------|----------|
| LUMENS | 100 |
| CANDELA | 2,000 |
| DISTANCE | 89m |
| RUN TIME | 1 hr |
| Laser mode run | 11 hours |



*Universal Kit includes one LED/laser aiming module and the following shells: GLOCK 42, GLOCK 26, M&P Shield, KAHR ARMS, SIG SAUER, KIMBER Micro. (Flat Dark Earth, Rail Mount, 1911 & Non Laser models not included)

| Description | Item # |
|--|--------|
| TLR-6 (GLOCK® 42/43) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69270 |
| TLR-6 (GLOCK® 26/27/33) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69272 |
| TLR-6 Universal Kit* – Includes LED/Laser module and select TLR-6 body housings – Black | 69277 |
| TLR-6 (M&P® Shield™ 40/9) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69273 |
| TLR-6 (GLOCK® 42/43) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Flat Dark Earth | 69278 |
| TLR-6 (SIG SAUER® P365) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69284 |
| TLR-6 (GLOCK® 43X/48 MOS) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69286 |
| TLR-6 (SA Hellcat®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69287 |
| TLR-6 (Taurus GX4™) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69288 |
| TLR-6 (GLOCK® 17/19/21) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69290 |
| TLR-6 (SA XD®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69291 |
| TLR-6 (S&W M&P®) White LED/Red Laser – Includes (2) CR 1/3N lithium batteries – Black | 69293 |
| NON-LASER MODELS | |
| TLR-6 (GLOCK® 42/43) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69280 |
| TLR-6 (GLOCK® 26/27/33) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69282 |
| TLR-6 (M&P® Shield™) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69283 |
| TLR-6 (SIG SAUER® P365®/XL) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69285 |

| Size and Weight | Battery |
|---|----------------------|
| 2.3" (5.84 cm); 1.27 oz (36g) Size & Weight vary by model | (2) CR-1/3 N Lithium |

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Armory®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.



TLR-6 HL®

WHITE LIGHT ILLUMINATOR / RED LASER OR GREEN LASER



Ultra-compact weapon light with a high-power LED and integrated aiming laser features a rechargeable battery system powering 300 lumens of bright light

- Designed to securely attach to multiple variations of weapons
- Includes three easy-to-swap batteries to triple your run time
- Portable charging case conveniently stores and charges batteries without the need to tether your gun

| | |
|----------|--------|
| LUMENS | 300 |
| CANDELA | 4,250 |
| DISTANCE | 130m |
| RUN TIME | 20 min |

Red laser runs 9 hours
Green laser runs 5 hours



| Description | Item # |
|--|--------|
| TLR-6 HL (GLOCK® 42/43) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69340 |
| TLR-6 HL (GLOCK® 42/43) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth | 69341 |
| TLR-6 HL (M&P® Shield™ 40/9) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69342 |
| TLR-6 HL (GLOCK® Rail Mount) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69343 |
| TLR-6 HL (SIG SAUER® P365/XL) White LED/Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69344 |
| TLR-6 HL G (GLOCK® 42/43) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69350 |
| TLR-6 HL G (GLOCK® 42/43) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth | 69351 |
| TLR-6 HL G (M&P® Shield™ 40/9) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69352 |
| TLR-6 HL G (GLOCK® Rail Mount) White LED/Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69353 |
| TLR-6 HL G (SIG SAUER® P365/XL) Without Laser – White LED – Includes (3) SL-B2 batteries and charger - Black | 69354 |

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Armory®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

| Size and Weight | Battery |
|---|-------------------|
| 2.5" (6.35 cm); 1.12 oz (31.8g) Size & Weight vary by model | (1) SL-B2 battery |



UPGRADED

TLR-7® X

WHITE LIGHT ILLUMINATOR



Multi-fuel rail-mounted light

- User-interchangeable paddle switches to accommodate your shooting style
- Accepts either SL-B9 or CR123A batteries
- SL-B9 battery pack recharges in 2.5 hours
- Front loading batteries

| | SL-B9 | CR123A |
|-----------------|-------|---------|
| LUMENS | 725 | 550 |
| CANDELA | 9,500 | 7,200 |
| DISTANCE | 195m | 170m |
| RUN TIME | 1 hr | 1.5 hrs |

| Description | Item # |
|---|--------|
| TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - Black | 69424 |
| TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - FDE | 69429 |
| TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 battery pack and USB-C cord - Black | 69455 |
| TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 battery pack and USB-C cord - FDE | 69456 |

| Size and Weight | Battery |
|--|--|
| 2.58 in (6.55 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.48g (70.3g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |



Safe Off feature prevents accidental activation; saves batteries

UPGRADED

TLR-7® X CONTOUR REMOTE

WHITE LIGHT ILLUMINATOR



Designed for one-handed shooting – ideal for dog handlers, SWAT teams, door breaching and close-quarter operations

- Rail grip clamp system lets you attach and remove quickly and securely — no tools needed, no hands near the muzzle
- Ambidextrous rear on/off switch; pressure-controlled grip switch provides momentary operation
- Front loading batteries
- Cannot be retrofitted with existing TLR-7 X products

| | SL-B9 | CR123A |
|-----------------|-------|---------|
| LUMENS | 725 | 550 |
| CANDELA | 9,500 | 7,200 |
| DISTANCE | 195m | 170m |
| RUN TIME | 1 hr | 1.5 hrs |

| Description | Item # |
|---|--------|
| TLR-7 X Contour Remote - for GLOCK® GEN 4 or GEN 5 models - Includes mounting key and (1) CR123A battery - Black | 69428 |
| TLR-7 X Contour Remote - for SIG SAUER® P320® XCARRY frame - Includes mounting key and (1) CR123A battery - Black | 69480 |

| Size and Weight | Battery |
|--|--|
| 4.6" (11.68 cm); SL-B9: 2.85 oz (80.7g) // CR123A: 2.69 oz (76.3g) | (1) CR123A lithium battery or (1) SL-B9 battery pack |



Safe Off feature prevents accidental activation; saves batteries

Streamlight's "X" Series indicates they are multi-fuel lights - you have the option to choose our rechargeable batteries which could save you money and reduce waste!

Rechargeable batteries can be used over and over, leaving fewer batteries to be manufactured (and transported) than with disposable batteries, helping to reduce both air and water pollution. Consuming up to 23 times less non-renewable natural resources they are making a positive impact on the environment and helping to reduce global warming.



STANDARD BATTERIES

VS.

STREAMLIGHT RECHARGEABLE BATTERIES

- Very costly to replace
- Must be replaced often
- Create more packaging
- Create more downstream waste

- Only need to be replaced every 2 - 5 years
- Reduce downstream waste
- Excellent performance
- 2 year battery warranty

SL-B9® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK


The battery that transforms multi-fuel, high performance gun lights into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 2.5 hours
- Integrated safety circuit protects battery from overcharge



| Description | Item # |
|---|--------|
| SL-B9 Li-Ion USB rechargeable battery pack - 2pk | 20237 |
| SL-B9 Li-Ion USB rechargeable battery pack - 8pk | 20238 |
| SL-B9 Li-Ion USB rechargeable battery pack - 100pk | 20239 |
| SL-B9 8-Unit Bank Charger - 12V - batteries not included | 20230 |
| SL-B9 8-Unit Bank Charger - 120V - batteries not included | 20231 |
| SL-B9 8-Unit Bank Charger - 12V - Includes (8) SL-B9 batteries | 20233 |
| SL-B9 8-Unit Bank Charger - 120V - Includes (8) SL-B9 batteries | 20234 |
| 22" (55.88 cm) USB-C Cord | 22084 |

| Size and Weight | Battery |
|--|--|
| 1.36" x 0.67" (3.45 x 1.7 cm); 0.7 oz (19.8g) | 850mAh SL-B9 protected Li-Ion USB rechargeable battery pack |

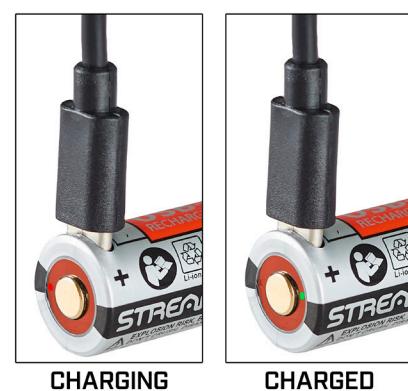



UPGRADED

TLR-7® HL-X USB

WHITE LIGHT ILLUMINATOR



High-lumen, high-candela, multi-fuel tactical light

- Facecap engineered to produce a longer reaching, tighter beam
- User-interchangeable switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|-----------------|------------------|-----------------------|---------|
| LUMENS | 1,100 | 550 | 550 |
| CANDELA | 23,000 | 11,000 | 11,000 |
| DISTANCE | 303m | 210m | 210m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |

| Description | Item # |
|---|--------|
| TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack and USB-C cord - Black | 69458 |
| TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack and USB-C cord - FDE | 69459 |

| Size and Weight | Battery |
|--|--|
| 2.9" (7.37 cm); SL-B9: 2.88 oz (81.6g) // CR123A: 2.8 oz (79.4g) | (1) SL-B9 battery pack or CR123A lithium battery |



UPGRADED

TLR-7® HL-X SUB

WHITE LIGHT ILLUMINATOR

Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style



| Description | Item # |
|--|--------|
| TLR-7 HL-X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69503 |
| TLR-7 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69504 |
| TLR-7 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69505 |
| TLR-7 HL-X sub USB (1913OS) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69506 |

| Size and Weight | Battery |
|--|---|
| 2.51" (6.38 cm); SL-B9: 2.49 oz (70.6g) // CR123A: 2.39 oz (67.8g) | (1) SL-B9 battery or (1) CR123A lithium battery |

| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|----------|------------------|-----------------------|---------|
| LUMENS | 1,000 | 550 | 550 |
| CANDELA | 13,000 | 7,300 | 7,300 |
| DISTANCE | 228m | 171m | 171m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |



Safe Off feature prevents accidental activation; saves batteries

UPGRADED

TLR-7® X SUB

WHITE LIGHT ILLUMINATOR

Multi-fuel weapon light for subcompact handguns

- Ultra-compact and lightweight
- Fits on select railed subcompact pistols
- Includes interchangeable paddle switches



| Description | Item # |
|---|--------|
| TLR-7 X sub (GLOCK® 43X/48 MOS 43X/48 Rail Models Only) - Includes mounting kit with key and CR123A lithium battery - Black | 69400 |
| TLR-7 X sub (SIG SAUER® P365®/XL Closed Rail System) - Includes mounting kit with key and CR123A lithium battery - Black | 69401 |
| TLR-7 X sub (1913) - Includes mounting kit with key and CR123A lithium battery - Black | 69402 |
| TLR-7 X sub (1913OS) - Includes mounting kit with keys and CR123A lithium battery - Black | 69404 |
| TLR-7 X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail Models Only) - Includes mounting kit with key and SL-B9 battery pack - Black | 69405 |
| TLR-7 X sub USB (SIG SAUER® P365®/XL Closed Rail System) - Includes mounting kit with key and SL-B9 battery pack - Black | 69406 |
| TLR-7 X sub USB (1913) - Includes mounting kit with key and SL-B9 battery pack - Black | 69407 |
| TLR-7 X sub USB (1913OS) - Includes mounting kit with keys and SL-B9 battery pack - Black | 69408 |

| | SL-B9 | CR123A |
|----------|-------|---------|
| LUMENS | 725 | 550 |
| CANDELA | 7,700 | 5,000 |
| DISTANCE | 176m | 140m |
| RUN TIME | 1 hr | 1.5 hrs |



Safe Off feature prevents accidental activation; saves batteries

| Size and Weight | Battery |
|--|---|
| 2.51" (6.38 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.39 oz (67.8g) | (1) SL-B9 battery or (1) CR123A lithium battery |

TLR-8® HL-X

WHITE LIGHT ILLUMINATOR / RED LASER

Rechargeable, high-lumen, multi-fuel tactical light with 640-660nm red laser

- Facecap engineered to produce a longer reaching, tighter beam
- User interchangeable paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries



| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|-----------------|------------------|-----------------------|---------|
| LUMENS | 1,000 | 500 | 500 |
| CANDELA | 22,000 | 11,000 | 11,000 |
| DISTANCE | 297m | 210m | 210m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |

Laser mode runs 29 hours

Description

Item

TLR-8 HL-X USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black

69465

Size and Weight

Battery

2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g)

(1) SL-B9 battery pack or (1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

TLR-8® HL-X G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Rechargeable, high-lumen, multi-fuel tactical light with 510-530nm green laser

- Facecap engineered to produce a longer reaching, tighter beam
- Includes rear paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries



| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|-----------------|------------------|-----------------------|---------|
| LUMENS | 1,000 | 500 | 500 |
| CANDELA | 22,000 | 11,000 | 11,000 |
| DISTANCE | 297m | 210m | 210m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |

Laser mode runs 10 hours

Description

Item

TLR-8 HL-X G USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black

69475

Size and Weight

Battery

2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g)

(1) SL-B9 battery pack or (1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries



TLR-8® HL-X SUB

WHITE LIGHT ILLUMINATOR / RED LASER



Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

| Description | Item # |
|---|--------|
| TLR-8 HL-X sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69466 |
| TLR-8 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO | 69467 |
| TLR-8 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69468 |
| TLR-8 HL-X sub USB (19130S) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69469 |

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); SL-B9: 2.87 oz (81.4g) // CR123A: 2.77 oz (78.5g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|-----------------|------------------|-----------------------|---------|
| LUMENS | 1,000 | 500 | 500 |
| CANDELA | 10,000 | 5,000 | 5,000 |
| DISTANCE | 200m | 141m | 141m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |

Laser mode run 29 hours



Safe Off feature prevents
accidental activation;
saves batteries

TLR-8® HL-X G SUB

WHITE LIGHT ILLUMINATOR / GREEN LASER



Multi-fuel, high-lumen tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

| Description | Item # |
|---|--------|
| TLR-8 HL-X G sub USB (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69476 |
| TLR-8 HL-X G sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO | 69477 |
| TLR-8 HL-X G sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 rechargeable battery pack and USB-C cord - Black | 69478 |
| TLR-8 HL-X G sub USB (19130S) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69479 |

| | SL-B9 DEFAULT | SL-B9 PROGRAMMABLE | CR123A |
|-----------------|------------------|-----------------------|---------|
| LUMENS | 1,000 | 500 | 500 |
| CANDELA | 10,000 | 5,000 | 5,000 |
| DISTANCE | 200m | 141m | 141m |
| RUN TIME | 30 min | 1 hr | 1.5 hrs |

Laser mode run 10 hours



Safe Off feature prevents
accidental activation;
saves batteries

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); SL-B9: 2.87 oz (81.4g) // CR123A: 2.77 oz (78.5g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

TLR-8® X SUB

WHITE LIGHT ILLUMINATOR / RED LASER



Multi-fuel gun light with red laser designed to fit select railed subcompact pistols

- Features integrated 640-660nm red laser
- User interchangeable rear paddle switches
- Front loading batteries

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode: runs 60 hours

| Description | Item # |
|---|--------|
| TLR-8 X sub (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black | 69411 |
| TLR-8 X sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery *Does not fit the P365® XMACRO | 69417 |
| TLR-8 X sub (1913) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery - Black | 69418 |
| TLR-8 X sub (1913OS) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black | 69419 |

| Size and Weight | Battery |
|---|--|
| 2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g) | (1) SL-B9 battery pack or (1) CR123A lithium |

TLR-8® X G SUB

WHITE LIGHT ILLUMINATOR / GREEN LASER



Multi-fuel gun light with green laser designed to fit select railed subcompact pistols

- Features integrated 510-530nm green laser
- User interchangeable paddle switches
- Front loading batteries

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 11 hours

| Description | Item # |
|---|--------|
| TLR-8 X G sub (GLOCK® 43X/48 MOS 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery | 69431 |
| TLR-8 X G sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery *Does not fit the P365® XMACRO | 69437 |
| TLR-8 X G sub (1913) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery | 69438 |
| TLR-8 X G sub (1913OS) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery | 69439 |

| Size and Weight | Battery |
|---|--|
| 2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g) | (1) SL-B9 battery pack or (1) CR123A lithium |



Safe Off feature prevents accidental activation; saves batteries

TLR-8® X

WHITE LIGHT ILLUMINATOR / RED LASER

Compact, multi-fuel rail-mounted light with red laser

- Features integrated 640-660nm red laser
- User interchangeable paddle switches
- Front loading batteries

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 36 hours (SL-B9)
Laser mode runs 60 hours (CR123A)



Description

TLR-8 X – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black

Item

69414

Size and Weight

2.58" (6.55 cm); CR123A: 2.64 oz (74.8g) // (1) SL-B9 battery pack or (1) CR123A lithium

Battery

TLR-8® X G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Compact, multi-fuel rail-mounted light with green laser

- Features integrated 510-530nm green laser
- User interchangeable paddle switches
- Front loading batteries

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 11 hours



TLR-9®

WHITE LIGHT ILLUMINATOR



Slim designed, rail-mounted light that rapidly attach/detaches from full frame weapons

- Produces a concentrated beam with optimum peripheral illumination
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- User interchangeable paddle switches
- Front loading batteries

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours



Description

TLR-9 - Includes Rail Locating Keys and (2) CR123A lithium batteries with high/low switches - Black

Item

69464

Size and Weight

3.87" (9.83 cm); 4.26 oz (120.8g) (2) CR123A lithium

Battery

TLR-10®

WHITE LIGHT ILLUMINATOR / RED LASER

Rail-mounted light with 640-660m red laser that rapidly attaches/detaches from full frame weapons

- Fits on select railed subcompact pistols
- User interchangeable rear paddle switches
- Front loading batteries

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Laser mode runs 60 hours



TLR-10® G

WHITE LIGHT ILLUMINATOR / GREEN LASER

Rail-mounted light with green laser that rapidly attaches/detaches from full frame weapons

- Features a white LED and 510-530nm green laser
- Front-loading battery capability
- User interchangeable paddle switches



| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Laser mode runs 11 hours



| Description | Item # |
|---|--------|
| TLR-10 - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black | 69470 |

| Description | Item # |
|---|--------|
| TLR-10 G - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black | 69473 |

| Size and Weight | Battery |
|---------------------------------|--------------------|
| 3.87" (9.82 cm); 4.62 oz (131g) | (2) CR123A lithium |

| Size and Weight | Battery |
|---------------------------------|--------------------|
| 3.87" (9.82 cm); 4.62 oz (131g) | (2) CR123A lithium |

SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various fire arms
- Air travel suitable with supplied padlock

| Description | Item # |
|--|--------|
| SpeedLocker - Includes padlock and Allen Key | 59000 |
| Padlock with 3 keys | 59001 |
| 3' (91.44 cm) Security Cable | 59002 |



Notice: The SpeedLocker® is not an approved firearm safe. It is the user's responsibility to determine the suitability for the specific situation and need.



TLR-VIR® II

WHITE LIGHT/ IR/ IR LASER COMBO ILLUMINATOR



White LED weapon light with infrared LED and laser options

- Two lighting modes available
- IR requires night vision goggles
- Windage and Elevation adjustment screws with tactile indication
- Securely fits M17/M18 pistols and all long guns with MIL-STD-1913 rails

| | |
|------------------|----------|
| LUMENS | 300 |
| CANDELA | 5000 |
| DISTANCE | 600mW/sr |
| VISIBLE RUN TIME | 1.5 hrs |
| IR RUN TIME | 12 hrs |

| Description | Item # |
|--|--------|
| TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and CR123A lithium battery - Coyote | 69191 |
| TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and CR123A lithium battery - Black | 69192 |

| Size and Weight | Battery |
|--------------------------------|--------------------|
| 3.3" (8.39 cm); 3.82 oz (108g) | (1) CR123A lithium |



TLR® RM 1 HL-X

COMPACT RAIL MOUNTED LIGHTING SYSTEM



Lightweight and compact, multi-fuel TLR light

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

| | SL-B9 | CR123A |
|-----------------|--------|---------|
| LUMENS | 1,000 | 500 |
| CANDELA | 22,000 | 11,000 |
| DISTANCE | 297m | 210m |
| RUN TIME | 30 min | 1.5 hrs |

1000
LUMENS



Safe Off feature prevents
accidental activation; saves
batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|--|--------|-----|-----|
| TLR RM 1 HL-X USB - System - Includes straight momentary pressure switch, key kit, USB-C cord and (1) SL-B9 battery pack - Black | 69483 | US | YES |
| TLR RM 1 HL-X USB - Light Only - Includes key kit and (1) SL-B9 battery pack - Black | 69484 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.64" (9.25 cm); SL-B9: 3.12 oz (88.5g) // CR123A: 3.02 oz (85.6g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

TLR® RM 1

COMPACT RAIL MOUNTED LIGHTING SYSTEM



Compact light, built for long guns, delivering a powerful, far-reaching beam without sacrificing lumens

- Designed to provide increased candela while maintaining high-lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

| | |
|-----------------|---------|
| LUMENS | 500 |
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours



Safe Off feature prevents
accidental activation;
saves batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|---|--------|-----|-----|
| TLR RM 1 - System - Includes remote door switch, remote pressure switch, mounting clips & CR123A lithium battery - Black (image shown to the right) | 69440 | US | YES |
| TLR RM 1 - Light Only - Includes key kit & (1) CR123A lithium battery - Black | 69441 | US | YES |
| TLR RM 1 - with Dual Remote Switch | 69442 | US | YES |

| Size and Weight | Battery |
|----------------------------------|--------------------|
| 3.64" (9.25 cm); 3.02 oz (85.6g) | (1) CR123A lithium |





TLR® RM 2

COMPACT RAIL MOUNTED LIGHTING SYSTEM



Rail mounted light delivers superior performance with a focused long-range, high-candela beam all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours



Safe Off feature prevents accidental activation; saves batteries

Description

TLR RM 2 - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black (image shown to the right)

TLR RM 2 - Light Only - Includes CR123A lithium battery - Black

Item

69450 US YES

69451 US YES



Optional M-LOK® mount sold separately

Size and Weight

4.97" (12.6 cm); 4.68 oz (132.7g)

Battery

(2) CR123A lithium



TLR® RM 1 LASER

WHITE LIGHT ILLUMINATOR / RED LASER



Designed for long guns, this compact light projects a far-reaching, high-candela beam - without compromising overall lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit with front loading batteries
- 640-660nm red laser

| | |
|----------|---------|
| LUMENS | 500 |
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 60 hours



Safe Off feature prevents
accidental activation;
saves batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|--|--------|-----|-----|
| TLR RM 1 Laser - System - Includes remote pressure switch, mounting clips, (1) CR123A lithium battery - Black (image shown to the right) | 69445 | US | YES |
| TLR RM 1 Laser - Light Only - Includes key kit and (1) CR123A lithium battery - Black | 69446 | US | YES |

| Size and Weight | Battery |
|----------------------------------|--------------------|
| 3.64" (9.25 cm); 3.24 oz (91.9g) | (1) CR123A lithium |

TLR® RM 2 LASER

WHITE LIGHT ILLUMINATOR / RED LASER



Long-range, focused, high-candela light with 640-660nm red laser - all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 60 hours



Safe Off feature prevents
accidental activation;
saves batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|---|--------|-----|-----|
| TLR RM 2 Laser - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black (image shown to the right) | 69447 | US | YES |
| TLR RM 2 Laser - Light Only - Includes key kit and (2) CR123A lithium batteries - Black | 69448 | US | YES |

| Size and Weight | Battery |
|-----------------------------------|--------------------|
| 4.97" (12.6 cm); 5.11 oz (144.7g) | (2) CR123A lithium |



TLR® RM 1 LASER-G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Low-profile long gun light featuring a longer reaching, tighter beam and green laser

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

| | |
|----------|---------|
| LUMENS | 500 |
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 11 hours



Safe Off feature prevents
accidental activation;
saves batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|--|--------|-----|-----|
| TLR RM 1 Laser-G - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black (image shown to the right) | 69443 | US | YES |
| TLR RM 1 Laser-G - Light Only - Includes key kit and (1) CR123A lithium battery - Black | 69444 | US | YES |

| Size and Weight | Battery |
|----------------------------------|--------------------|
| 3.64" (9.25 cm); 3.24 oz (91.9g) | (1) CR123A lithium |



TLR® RM 2 LASER-G

WHITE LIGHT ILLUMINATOR / GREEN LASER



Larger rail mount light with longer-reaching, tighter beam and even greater candela production, all while maintaining high-lumen output

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Green laser runs 11 hours



Safe Off feature prevents
accidental activation;
saves batteries



Optional M-LOK® mount
sold separately

| Description | Item # | COO | TAA |
|--|--------|-----|-----|
| TLR RM 2 Laser-G - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black (image shown to the right) | 69453 | US | YES |
| TLR RM 2 Laser-G - Light Only - Includes key kit and (1) CR123A lithium battery - Black | 69454 | US | YES |

| Size and Weight | Battery |
|-----------------------------------|--------------------|
| 4.97" (12.6 cm); 5.11 oz (144.7g) | (2) CR123A lithium |





TLR-1 HPL®

WHITE LIGHT ILLUMINATOR



High-candela, long-range, rail-mounted tactical light that produces an intensely bright, far-reaching wide beam

- Deep dish parabolic reflector produces long-range targeting beam with optimum peripheral illumination
- Available with either standard door switch or remote door switch

| | |
|----------|---------|
| LUMENS | 1,000 |
| CANDELA | 60,000 |
| DISTANCE | 490m |
| RUN TIME | 1.5 hrs |



| Description | Item # |
|---|--------|
| TLR-1 HPL Standard Switch - Includes Rail Locating Keys and lithium batteries - Black | 69215 |
| TLR-1 HPL Remote Switch - Includes Rail Locating Keys, remote switch, door switch and lithium batteries - Black | 69216 |
| TLR-1 HPL Long Gun Kit - Includes "safe off" remote door switch, remote pressure switch, mounting clips, standard door switch and lithium batteries - Black | 69219 |

| Size and Weight | Battery |
|--|---------------------------------|
| 4.83" (12.27 cm); 5.6 oz (158.8g) // With Remote: 5.25" (13.34 cm); 5.9 oz (167.3g) | (2) CR123A lithium batteries |



TL-RACKER®



All-in-one integrated shotgun forend light that reduces snag by eliminating the need for remote cords

- Ideal for shotgun breaching and close-quarter operations
- Ease of access with momentary and constant on modes
- Elongated switch pad accommodates virtually any hand size



1000
LUMENS

Models available for Mossberg™
500®/590® and Remington 870™



| Description | Item # |
|---|--------|
| TL-Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Black | 69600 |
| TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Black | 69601 |
| TL Racker - Mossberg 590 Shockwave with strap - Includes (2) CR123A lithium batteries - Black | 69602 |
| TL Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Orange | 69610 |
| TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Orange | 69611 |
| TL-Racker Forend Wrench | 69603 |




Note: For TL Rackers #69610 and #69611, orange designed for less lethal options

| Size and Weight | Battery |
|-------------------------------|--------------------|
| 8" (20.32 cm); 12.1 oz (343g) | (2) CR123A lithium |

TLR ACCESSORIES

| | ITEM # | TLR-1 HL-X TLR-1 HP-X | TLR-1 HP TLR-1 HL TLR-2 HL | TLR-2 G TLR-2 HL G | TLR-1 TLR-1s | TLR-2 TLR-2s | TLR-3X | TLR-VIR II | TLR-6 | TLR-6 HL TLR-6 HL G | TLR-7 X USB | TLR-7 HL-X USB |
|---|--------|--------------------------|----------------------------------|-----------------------|-----------------|-----------------|--------|------------|-------|------------------------|----------------|-------------------|
| Ambidextrous Vertical Grip with Rail | 69114 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | |
| TLR 12 ga. Mag Mount Mag Tube/Mossberg Rail | 69901 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | ✓ | ✓ |
| Remington 870 Mount | 69906 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | ✓ | ✓ |
| TLR-1 and TLR-2 Key Kit | 69175 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit | 69177 | | | | | | | | | | ✓ | ✓ |
| TLR-1 HL-X Key Kit | 69178 | ✓ | | | | | | | | | | |
| TLR M-LOK® Mount | 88301 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Contour Remote - GLOCK® | 69300 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Contour Remote - M&P® | 69310 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Contour Remote - SIG SAUER® P320® | 69481 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| TLR-1/TLR-2 Remote Door Switch | 69130 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Door Switch with Safe Off | 69161 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Tail Switch Kit TLR-7 X and TLR-9 | 69490 | | | | | | | | | | ✓ | ✓ |
| Tail Switch Kit TLR-8 X/TLR-8 X G/TLR-10/TLR-10 G | 69491 | | | | | | | | | | | |
| Tail Switch Kit TLR-7 X sub | 69492 | | | | | | | | | | | |
| Tail Switch Kit TLR-8 X sub/TLR-8 X G sub | 69493 | | | | | | | | | | | |
| Tape Switch | 69132 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Coil Pressure Switch | 69134 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Straight Momentary Pressure Switch | 69135 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Straight Latching Pressure Switch | 89008 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Dual Remote Switch | 69138 | | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Remote Retaining Clips | 88178 | | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| Red Flip Lens | 69115 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| Blue Flip Lens | 69116 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| Green Flip Lens | 69117 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| IR Flip Lens | 69118 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| Opaque Flip Lens | 69124 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | |
| CR123A Batteries - 2pk | 85175 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ |
| CR123A Batteries - 8pk | 85180 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ |
| CR123A Batteries - 12pk | 85177 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ |
| CR123A Batteries - 400pk | 85179 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ |
| CR1/3N Batteries - 2pk | 69271 | | | | | | | | | ✓ | | |
| CR1/3N Batteries - 12pk | 69281 | | | | | | | | | ✓ | | |
| SL-B9 Battery Pack - 2pk | 20237 | ✓ | | | | | | ✓ | | | ✓ | ✓ |
| SL-B2 Battery - 2pk | 22121 | | | | | | | | | | ✓ | |
| SL-B2 Charging Case | 22120 | | | | | | | | | | ✓ | |







PROTAC® RAIL MOUNT SERIES

NEW

PROTAC® RAIL MOUNT 1L-X



IP67

NEW

PROTAC® RAIL MOUNT 1L-X PRO



IP54



IP67

Compact, multi-fuel, high-output tactical light designed for short-barreled rifles, carbines, and submachine guns available in two models

- **1L-X Pro:** Jack-Cap® tailcap switch that offers operational switch redundancy with push-button operation or remote pressure switch operation
- **1L-X:** Uses a standard push button tail switch (as seen in image to the right) for ease of activation without a pressure pad
- **TEN-TAP® Programmable**
- **MIL-STD-1913 Picatinny rail and M-LOK® mounts included**



| SL-B9 | HIGH | LOW |
|------------------------|---------|---------|
| LUMENS | 850 | 100 |
| CANDELA | 30,000 | 3,400 |
| DISTANCE | 346m | 117m |
| RUN TIME | 0.5 hrs | 4.5 hrs |
| Strobe runs 1.25 hours | | |

| CR123A | HIGH | LOW |
|-----------------------|----------|---------|
| LUMENS | 500 | 100 |
| CANDELA | 18,000 | 3,400 |
| DISTANCE | 268m | 117m |
| RUN TIME | 1.75 hrs | 6.5 hrs |
| Strobe runs 2.5 hours | | |

| Description | Item # |
|---|--------|
| ProTac Rail Mount 1L-X - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) CR123A lithium battery - Black | 89026 |
| ProTac Rail Mount 1L-X USB - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) SL-B9 battery pack and USB cord - Black | 89027 |

| Description | Item # |
|---|--------|
| ProTac Rail Mount 1L-X Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) CR123A lithium battery - Black | 89024 |
| ProTac Rail Mount 1L-X USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B9 battery pack and USB cord - Black | 89025 |

Size and Weight

4.64" (11.79 cm); CR123A: 5.5 oz (155.9g) // SL-B9: 5.6 oz (158.8g)

Battery

(1) CR123A lithium or (1) SL-B9 battery pack

PROTAC® RAIL MOUNT 1

Long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or M-LOK® mount

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- Multi-fuel; uses either a lithium or alkaline battery
- TEN-TAP® Programmable



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed

| CR123A | HIGH | LOW |
|-----------------|----------|----------|
| LUMENS | 350 | 40 |
| CANDELA | 12,000 | 1,380 |
| DISTANCE | 219m | 19m |
| RUN TIME | 1.75 hrs | 14.5 hrs |

Strobe runs 3 hours

| ALKALINE | HIGH | LOW |
|-----------------|---------|-------|
| LUMENS | 150 | 40 |
| CANDELA | 4,950 | 1,380 |
| DISTANCE | 141m | 19m |
| RUN TIME | 1.5 hrs | 8 hrs |

Strobe runs 2.75 hours

Description

ProTac Rail Mount 1 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK mount, (1) AA alkaline battery and (1) CR123A lithium battery - Black

Item

88058

M-LOK® is a registered trademark of Magpul Industries Corp.



PROTAC® RAIL MOUNT 2

Lightweight, rugged long gun light equipped with a fixed mount compatible with MIL-STD 1913 Picatinny rails or M-LOK mount for flexible installment operations

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed

| | HIGH | LOW |
|-----------------|--------|--------|
| LUMENS | 625 | 60 |
| CANDELA | 22,000 | 2,000 |
| DISTANCE | 297m | 89m |
| RUN TIME | 2 hrs | 21 hrs |

Strobe runs 2.75 hours



Description

ProTac Rail Mount 2 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black

Item

88059

Size and Weight

5" (12.7 cm); 5 oz (141.7g)

Battery

(2) CR123A lithium batteries

PROTAC® RAIL MOUNT HL-X PRO

Long range, low-profile, long gun light with a Jack-Cap® tailcap switch (as seen in image below) that offers operational switch redundancy with both push-button operation or remote pressure switch operation

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable



IP54

With Remote Pressure Switch installed



IP67

With Standard button switch installed



| | HIGH | LOW |
|------------------------|----------|--------|
| LUMENS | 1,000 | 60 |
| CANDELA | 50,000 | 3,100 |
| DISTANCE | 447m | 111m |
| RUN TIME CR123A | 1.25 hrs | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

| Description | Item # |
|---|--------|
| ProTac Rail Mount HL-X Pro - Includes Jack-Cap®, momentary remote switch, remote retaining clips, mounting hardware, M-LOK mount and (2) CR123A lithium batteries - Black | 88126 |
| ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and USB cord - Black | 88127 |
| ProTac Rail Mount HL-X Pro - Light Only - Includes Jack-Cap®, M-LOK mount and (2) CR123A lithium batteries - Black | 88128 |
| ProTac Rail Mount HL-X Pro USB - Light Only - Includes Jack-Cap®, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black | 88129 |

| Size and Weight | Battery |
|---|---|
| 5.43" (13.8 cm); CR123A: 6.6 oz (187.1g) // SL-B26: 7.2 oz (204.1g) | (2) CR123A lithium or (1) SL-B26 battery pack |



PROTAC® RAIL MOUNT HL-X LASER



High-lumen long gun light with integrated red aiming laser with windage and elevation adjustments

- Unique functionality with its double switches; push button tailcap or remote pressure switch
- Multi-fuel innovation; available as USB rechargeable system or lithium battery version
- Rail grabber is separate from light so you can rotate it within the clamp and maintain windage and elevation settings
- TEN-TAP® Programmable

| | HIGH | LOW |
|------------------------|----------|--------|
| LUMENS | 1,000 | 60 |
| CANDELA | 18,200 | 1,100 |
| DISTANCE | 270m | 66m |
| RUN TIME CR123A | 1.25 hrs | 20 hrs |
| RUN TIME SL-B26 | 1.5 hrs | 23 hrs |

Strobe runs 2.5 hours (CR123A) // 3.25 hours (SL-B26)

| Description | Item # |
|--|--------|
| ProTac Rail Mount HL-X Laser - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (2) CR123A lithium batteries - Black | 88089 |
| ProTac Rail Mount HL-X Laser USB - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (1) SL-B26 battery pack and USB cord - Black | 88090 |

| Size and Weight | Battery |
|---|---|
| 6.56" (16.7 cm); SL-B26: 10.8 oz (306g) // CR123A: 10.3 oz (292g) | (2) CR123A lithium or (1) SL-B26 battery pack |

PROTAC® RAIL MOUNT HL-X

High-lumen long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or with M-LOK® mount allowing for alternative mounting options

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

| | HIGH | LOW |
|------------------------|----------|--------|
| LUMENS | 1,000 | 60 |
| CANDELA | 50,000 | 3,100 |
| DISTANCE | 447m | 111m |
| RUN TIME CR123A | 1.25 hrs | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

| Description | Item # |
|---|--------|
| ProTac Rail Mount HL-X - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black | 88066 |
| ProTac Rail Mount HL-X USB - Includes remote switch, tail switch, remote retaining clips mounting hardware, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black | 88071 |

M-LOK® is a registered trademark of Magpul Industries Corp.

| Size and Weight | Battery |
|---|---|
| 5.43" (13.8 cm); CR123A: 6.4 oz (181.4g) // SL-B26: 6.9 oz (195.6g) | (2) CR123A lithium or (1) SL-B26 battery pack |



IP54
With Remote Pressure Switch installed

IP67
With Standard button switch installed



PROTAC® RAIL MOUNT HP-X PRO

Long range, high-candela long gun light with Jack-Cap® switch

- Jack-Cap® tailcap switch (as shown in the image below) offers operational switch redundancy with both push-button operation or remote pressure switch operation
- TEN-TAP® Programmable



| | HIGH | LOW |
|------------------------|---------|--------|
| LUMENS | 800 | 55 |
| CANDELA | 105,000 | 7,600 |
| DISTANCE | 648m | 174m |
| RUN TIME SL-B26 | 2 hrs | 26 hrs |
| RUN TIME CR123A | 1.5 hrs | 18 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)



IPX4

With Remote Pressure Switch installed



IPX7

With Standard button switch installed



| Description | Item # |
|--|--------|
| ProTac Rail Mount HP-X Pro - System - Includes Jack-Cap tail cap switch, M-LOK mount, mounting hardware, Allen wrench, straight momentary pressure switch and (2) CR123A lithium batteries | 89015 |
| ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap tail cap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Black | 89016 |
| ProTac Rail Mount HP-X Pro - Light Only - Includes Jack-Cap tail cap switch, M-LOK mount, Allen wrench and (2) CR123A lithium batteries - Black | 89017 |
| ProTac Rail Mount HP-X Pro USB - Light Only - Includes Jack-Cap tailcap switch, M-LOK mount, Allen wrench, (1) SL-B26 battery pack and USB cord - Black | 89018 |

| Size and Weight | Battery |
|---|---|
| 5.63" (14.3 cm); SL-B26: 7 oz (198g) // CR123A: 6.4 oz (181g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

PROTAC® 2.0 RAIL MOUNT

High-performance tactical light that produces 2,000 lumens without sacrificing run time

- Rechargeable SL-B50 battery pack that charges inside the light using a USB-C cord
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable



IPX4

With Remote Pressure Switch installed



IP67

With Standard Button Switch installed



| Description | Item # |
|---|--------|
| ProTac 2.0 Rail Mount - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® mount - Black | 89009 |
| ProTac 2.0 Rail Mount - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK® mount - Black | 89003 |

| Size and Weight | Battery |
|------------------------------|--------------------------------------|
| 6.3" (16 cm); 9.06 oz (257g) | (1) SL-B50 rechargeable battery pack |

| | HIGH | LOW |
|-----------------|---------|--------|
| LUMENS | 2,000 | 250 |
| CANDELA | 17,700 | 2,150 |
| DISTANCE | 266m | 93m |
| RUN TIME | 2.5 hrs | 11 hrs |

Strobe runs 4.5 hours





PROTAC® 2.0 RAIL MOUNT HP



High-performance tactical light offers a perfect blend of 2,000 lumens and 85,000 candela

- Powered by our proprietary SL-B50 rechargeable battery pack
- Charges inside the light, no need to remove from your weapon
- TEN-TAP® Programmable



| | HIGH | LOW |
|-----------------------|---------|--------|
| LUMENS | 2,000 | 250 |
| CANDELA | 85,000 | 11,500 |
| DISTANCE | 583m | 214m |
| RUN TIME | 2.5 hrs | 11 hrs |
| Strobe runs 4.5 hours | | |



| Description | Item # |
|--|--------|
| ProTac 2.0 Rail Mount HP - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® - Black | 89014 |
| ProTac 2.0 Rail Mount HP - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK mount - Black | 89013 |

| Size and Weight | Battery |
|------------------------------|--------------------------------------|
| 6.3" (16 cm); 9.06 oz (257g) | (1) SL-B50 rechargeable battery pack |

NEW**PROTAC® RAIL MOUNT VIR PRO**

Rail mount VIR gun light delivers both white light and IR illumination, easily selectable via a head-mounted, mode selector switch

- Positional Head
- Jack-Cap® tailcap switch offers operational switch redundancy with both push-button operation or remote pressure switch operation
- Integrated IR to white light safety cutoff
- Integrated rail clamp attaches to MIL-STD-1913 Picatinny rail or M-LOK® compatible rails

**IPX4**

With Remote Pressure Switch installed

**IPX7**

With Standard button switch installed

White LED and 940nm iR LED



Mode Selector Switch



Jack-Cap®

**Description****Item #**

ProTac Rail Mount VIR Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, and (2) CR123A lithium batteries - Black

88138

ProTac Rail Mount VIR USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack, 101.6 cm (40 in) USB Cord - Black

88139

M-LOK® is a registered trademark of Magpul Industries Corp.

| | HIGH | MEDIUM | LOW | IR HIGH | IR LOW |
|------------------------|---------|----------|--------|----------|----------|
| LUMENS | 1,100 | 540 | 120 | 2,300mW | 600mW |
| CANDELA | 40,000 | 19,000 | 4,200 | --- | --- |
| DISTANCE | 400m | 276m | 130m | --- | --- |
| RUN TIME SL-B26 | 2 hrs | 3.75 hrs | 14 hrs | 2 hrs | 9 hrs |
| RUN TIME CR123A | 1.5 hrs | 2.75 hrs | 11 hrs | 1.25 hrs | 7.25 hrs |

TEN-TAP® Programmable:

- White light high only/IR high only (default)
- White light medium only/IR high-low
- White light low-high/IR low-high

Size and Weight**Battery**

5.65" (14.4 cm); SL-B26: 8.8 oz (249g) // CR123A: 8.2 oz (231g)



PROTAC RAIL MOUNT ACCESSORIES

| DESCRIPTION | ITEM # | PROTAC RAIL MOUNT 1 RAIL MOUNT 2 | PROTAC RAIL MOUNT HL-X | PROTAC RAIL MOUNT HL-X LASER | PROTAC RAIL MOUNT 1L-X SERIES | PROTAC RAIL MOUNT 1L-X PRO SERIES | PROTAC 2.0 RAIL MOUNT SERIES | PROTAC RAIL MOUNT HL-X PRO RAIL MOUNT HP-X PRO RAIL MOUNT VIR PRO |
|---|--------|--|------------------------------|------------------------------------|--|--|------------------------------------|--|
| CR123A Lithium Batteries - 2pk | 85175 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| CR123A Lithium Batteries - 6pk | 85177 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| CR123A Lithium Batteries - 12pk | 85179 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| CR123A Lithium Batteries - 400pk | 85180 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord) | 22010 | | ✓ | ✓ | | | | ✓ |
| SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord) | 22011 | | ✓ | ✓ | | | | ✓ |
| 8-Unit SL-B26 Bank Charger - 120V DC (For more information on SL-B26 Bank Charger, visit page 107) | 20224 | | ✓ | ✓ | | | | ✓ |
| SL-B26 Battery Pack - 1pk | 22101 | | ✓ | ✓ | | | | ✓ |
| SL-B50 Battery Pack - 1pk | 22111 | | | | | | ✓ | |
| SL-B9 Battery Pack - 2pk | 20237 | | | | ✓ | ✓ | | |
| 120V AC USB Charge Cord | 22071 | | ✓ | ✓ | | | | |
| 22" (55.88 cm) USB-C Cord | 22084 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Red Filter | 69115 | ✓ | | | | | | |
| Blue Filter | 69116 | ✓ | | | | | | |
| Green Filter | 69117 | ✓ | | | | | | |
| IR Filter | 69118 | ✓ | | | | | | |
| Opaque Filter | 69124 | ✓ | | | | | | |
| M-LOK® Mount | 88300 | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ |
| Jack-Cap® | 88130 | | | | | | | ✓ |
| ProTac® 2.0 RM Tail Switch | 89020 | | | | | | ✓ | |
| Remote Retaining Clips | 88178 | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| Remote Switch | 88125 | | | ✓ | | | | |
| Remote Switch | 88098 | ✓ | | | | | | |
| Straight Momentary Pressure Switch | 69135 | | | | | ✓ | ✓ | ✓ |
| TLR Dual Remote Switch | 69138 | | | | | ✓ | ✓ | |
| Straight Latching Switch | 89008 | | | | | ✓ | ✓ | ✓ |



85175, 85177,
85179, 85180



22010



22011



20224



22101



22111



22071



22084



88300



88130



89020



88178



88125



88098



69115, 69116, 69117, 69118, 69142



69135



89008



69138



WEDGE® SERIES

WEDGE®



Powerful, pocket friendly, rechargeable, everyday carry flashlight available in multiple colors

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes (as shown in the image above)
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip



| | THRO | CONSTANT-ON |
|----------|--------|-------------|
| LUMENS | 1,000 | 300 |
| CANDELA | 3,000 | 1,200 |
| DISTANCE | 110m | 69m |
| RUN TIME | 35 sec | 3 hrs |



| Description | Item # |
|---|--------|
| Wedge - Includes USB-C cord, lanyard - Box - Black | 88810 |
| Wedge - Includes USB-C cord, lanyard - Box - Coyote | 88811 |
| Wedge - Includes USB-C cord, lanyard - Box - Red | 88814 |
| Wedge - Includes USB-C cord, lanyard - Box - Blue | 88817 |
| Wedge - Includes USB-C cord, lanyard - Box - Purple | 88818 |
| Wedge - Includes USB-C cord, lanyard - Box - Orange | 88820 |
| Wedge - Includes USB-C cord, lanyard - Box - Lime Green | 88821 |



Battery charge indicator located in the on/off switch
Charge indication:

Red – Charging // Green – Charged
Recharges in 3 hours

| Size and Weight | Battery |
|----------------------------------|-----------------|
| 5.46" (13.87 cm); 3.3 oz (93.5g) | Lithium Polymer |

NEW

WEDGE® SL



Ultra-thin, unibody constructed, uniquely shaped EDC inspection flashlight

- Four LED Battery Status Indicator LED (Flashing: Charging // 4 Solid-Segment/ Stage Charge Indication shown in image below): 4 LEDs = 75%; 3 LEDs = 50-75%; 2 LEDs = 25-50%; 1 LED = 10-25%
- Recharges in 4 hours
- TEN-TAP® programming switch allows user selection of high (factory default) or low intensity for constant on
- Aluminum body for strength and lightweight durability



| | THRO | HIGH | LOW |
|----------|-------|----------|---------|
| LUMENS | 500 | 100 | 50 |
| CANDELA | 1,600 | 300 | 150 |
| DISTANCE | 80m | 35m | 24m |
| RUN TIME | --- | 1.75 hrs | 3.5 hrs |

| Description | Item # |
|--|--------|
| Wedge SL - Includes end cover - Black | 88840 |
| Wedge SL - Includes end cover - Coyote | 88841 |
| Wedge SL - Includes end cover - Silver | 88842 |

| Size and Weight | Battery |
|-----------------------------------|-----------------|
| 5.65" (14.36 cm); 1.14 oz (32.3g) | Lithium Polymer |

WEDGE® XT



Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

| | HIGH | LOW |
|----------|-------|--------|
| LUMENS | 500 | 50 |
| CANDELA | 1,900 | 200 |
| DISTANCE | 87m | 28m |
| RUN TIME | 2 hrs | 11 hrs |



| Description | Item # |
|--|--------|
| Wedge XT - Includes USB-C cord, lanyard - Black | 88812 |
| Wedge XT - Includes USB-C cord, lanyard - Coyote | 88813 |
| Wedge XT - Includes USB-C cord, lanyard - Silver | 88819 |

| Size and Weight | Battery |
|----------------------------------|-----------------|
| 4.25" (10.8 cm); 2.62 oz (74.3g) | Lithium Polymer |



Charge indication LED:
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours



PROTAC® SERIES

PROTAC® 1L-1AA



Ultra-compact, everyday carry flashlight

- TEN-TAP® Programmable
- Multi-fuel - accepts multiple battery sources

| AA | HIGH | LOW |
|--------------------------|-------------|---------|
| LUMENS | 150 | 40 |
| CANDELA | 2,750 | 720 |
| DISTANCE | 105m | 53m |
| RUN TIME Alkaline | 1 hr 20 min | 7.5 hrs |
| RUN TIME Lithium | 4.25 hrs | 14 hrs |

Strobe runs 3.5 hours (Alkaline) // 8 hours (Lithium)

| CR123A | HIGH | LOW |
|-----------------|---------|--------|
| LUMENS | 350 | 40 |
| CANDELA | 6,400 | 720 |
| DISTANCE | 160m | 53m |
| RUN TIME | 1.5 hrs | 14 hrs |

Strobe runs 3 hours

| Description | Item # |
|--|--------|
| ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Black | 88061 |
| ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Coyote | 88073 |

| Size and Weight | Battery |
|--|---|
| 4.25" (10.8 cm); CR123A: 2.5 oz (71g) // Alkaline: 2.8 oz (79g) // Lithium: 2.4 oz (68g) | (1) CR123A lithium, (1) AA alkaline or (1) AA lithium |



PROTAC® 2.0



High-performance light that produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 2,000 | 570 | 100 |
| CANDELA | 17,300 | 5,000 | 890 |
| DISTANCE | 262m | 142m | 60m |
| RUN TIME | 2.5 hrs | 4.5 hrs | 25 hrs |

Strobe runs 4 hours 25 minutes

| Description | Item # |
|---|--------|
| ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black | 89000 |

| Size and Weight | Battery |
|---------------------------------|-------------------------|
| 6.1" (15.49 cm); 8.25 oz (234g) | (1) SL-B50 battery pack |



Slide sleeve back to access USB-C port.

SL-B50 battery pack charges in 6 hours.

PROTAC® 2.0 HP



High-candela flashlight strikes the ideal balance between candela and lumens, ensuring both reach and brightness without compromise

- TEN-TAP® Programmable
- One-handed option of momentary, variable intensity or strobe mode
- Slide sleeve back to charge battery while inside the light; fully recharges in 6 hours

| | HIGH | MEDIUM | LOW |
|----------|---------|--------|--------|
| LUMENS | 2,000 | 550 | 100 |
| CANDELA | 85,000 | 22,500 | 4,400 |
| DISTANCE | 583m | 300m | 132m |
| RUN TIME | 2.5 hrs | 5 hrs | 31 hrs |

Strobe runs 2 hours

| Description | Item # |
|--|--------|
| ProTac 2.0 HP - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black | 89023 |

| Size and Weight | Battery |
|---------------------------------|-------------------------|
| 6.1" (15.49 cm); 8.25 oz (234g) | (1) SL-B50 battery pack |



Slide sleeve back to access USB-C port.

SL-B50 battery pack charges in 6 hours.

PROTAC® 2AA-X



IPX7

Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

| Lithium Polymer | HIGH | LOW |
|-----------------|----------|--------|
| LUMENS | 550 | 40 |
| CANDELA | 10,250 | 740 |
| DISTANCE | 203m | 54m |
| RUN TIME | 2.25 hrs | 16 hrs |

Strobe runs 4.5 hours

| AA | HIGH | LOW |
|-----------------|---------|--------|
| LUMENS | 270 | 18 |
| CANDELA | 5,000 | 400 |
| DISTANCE | 141m | 40m |
| RUN TIME | 2.5 hrs | 48 hrs |

Strobe runs 5 hours

| Description | Item # |
|---|--------|
| ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Black | 88135 |
| ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Coyote | 88137 |
| ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black | 88033 |
| ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Coyote | 88072 |

| Size and Weight | Battery |
|-----------------------------|---|
| 6" (15.3 cm); 3.5 oz. (99g) | Lithium Polymer USB rechargeable battery or (2) AA alkaline |



6.0 in. (15.3 cm)

INCLUDED

NYLON HOLSTER

(1) RECHARGEABLE LITHIUM POLYMER BATTERY

REMOVEABLE POCKET CLIP

PROTAC® 2L



A compact and lightweight tactical light

- TEN-TAP® Programmable
- Maximum light output throughout battery life
- Push-button tail switch for momentary or constant on operation

| | HIGH | LOW |
|----------|----------|--------|
| LUMENS | 350 | 30 |
| CANDELA | 6,300 | 600 |
| DISTANCE | 159m | 49m |
| RUN TIME | 3.25 hrs | 35 hrs |

Strobe runs 6 hours



| Description | Item # |
|---|--------|
| ProTac 2L - Includes (2) CR123A lithium batteries and holster - Black | 88031 |

| Size and Weight | Battery |
|--------------------------------|------------------------------|
| 4.77" (12.12 cm); 2.8 oz (79g) | (2) CR123A lithium batteries |

PROTAC® 2L-X



Multi-fuel tactical light

- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation
- Pocket clip for convenience

| Description | Item # |
|---|--------|
| ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Clam - Black | 88062 |
| ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Box - Black | 88063 |
| ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black | 88082 |
| ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black | 88083 |

| Size and Weight | Battery |
|---|---|
| 5.14" (13 cm); SL-B26: 4.4 oz (125g) // CR123A: 3.9 oz (111g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

| | HIGH | LOW |
|-----------------|----------|--------|
| LUMENS | 500 | 40 |
| CANDELA | 6,800 | 600 |
| DISTANCE | 165m | 49m |
| RUN TIME CR123A | 2.75 hrs | 30 hrs |
| RUN TIME SL-B26 | 3.25 hrs | 30 hrs |

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)



PROTAC® HL-X



Multi-fuel flashlight with a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

| CR123A | HIGH | MEDIUM | LOW |
|-----------------|----------|--------|--------|
| LUMENS | 1,000 | 400 | 65 |
| CANDELA | 27,100 | 10,000 | 1,600 |
| DISTANCE | 330m | 200m | 80m |
| RUN TIME | 1.25 hrs | 3 hrs | 20 hrs |

Strobe runs 2.5 hours



PROTAC® HL



A tactical flashlight that produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti roll head design

| | HIGH | LOW |
|----------|----------|--------|
| LUMENS | 750 | 35 |
| CANDELA | 18,300 | 900 |
| DISTANCE | 270m | 60m |
| RUN TIME | 1.25 hrs | 18 hrs |

Strobe runs 2.5 hours



| Description | Item # |
|--|--------|
| ProTac HL - Includes (2) lithium batteries and holster - Black | 88040 |

| Size and Weight | Battery |
|-------------------------------|------------------------------|
| 5.4" (13.7 cm); 5.6 oz (158g) | (2) CR123A lithium batteries |

PROTAC® 90X



Multi-fuel, right angle, everyday carry light

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

| | HIGH | MEDIUM | LOW |
|-----------------|----------|----------|--------|
| LUMENS | 1,000 | 300 | 65 |
| CANDELA | 7,350 | 2,060 | 450 |
| DISTANCE | 171m | 91m | 42m |
| RUN TIME CR123A | 2.5 hrs | 4 hrs | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 4.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

| Description | Item # |
|--|--------|
| ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black | 88094 |
| ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black | 88095 |

| Size and Weight | Battery |
|---|---|
| 4.39" (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |



PROTAC HL® 6



Full-size, heavy duty flashlight delivers powerhouse illumination with 2 hours of run time

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

| Description | Item # |
|--|--------|
| ProTac HL 6 - Includes 120V AC Adapter, (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black | 88131 |
| ProTac HL 6 - Includes (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black | 88132 |

| Size and Weight | Battery |
|---------------------------------|-------------------------|
| 10.5" (26.6 cm); 1.3 lbs (590g) | (2) SL-B48 battery pack |

| | HIGH | MEDIUM | LOW |
|----------|--------|----------|----------|
| LUMENS | 5,300 | 1,500 | 450 |
| CANDELA | 80,000 | 23,000 | 6,700 |
| DISTANCE | 566m | 303m | 164m |
| RUN TIME | 2 hrs | 3.75 hrs | 12.5 hrs |

Strobe runs 4 hours



PROTAC HL® 5-X



Super-bright, heavy-duty multi-fuel flashlight

- Features a sure grip rubber sleeve
- Includes lanyard to ensure you'll never lose your grip
- TEN-TAP® Programmable

| Description | Item # |
|---|--------|
| ProTac HL 5-X - Includes (4) CR123A lithium batteries and wrist lanyard - Box - Black | 88074 |
| ProTac HL 5-X USB - Includes (2) SL-B26 battery packs, "Y" USB Cord and wrist lanyard - Box - Black | 88081 |

| Size and Weight | Battery |
|--|--|
| 9.53" (23.65 cm); SL-B26: 1 lb 3.4 oz (550g) // CR123A: 1 lb 2.4 oz (522g) | (4) CR123A lithium batteries or (2) SL-B26 battery packs |

| SL-B26 | HIGH | MEDIUM | LOW |
|----------|----------|--------|----------|
| LUMENS | 3,500 | 1,000 | 250 |
| CANDELA | 51,000 | 14,100 | 3,620 |
| DISTANCE | 452m | 237m | 120m |
| RUN TIME | 1.25 hrs | 3 hrs | 11.5 hrs |

Strobe runs 1.25 hours

| CR123A | HIGH | MEDIUM | LOW |
|----------|---------|---------|----------|
| LUMENS | 2,500 | 1,000 | 250 |
| CANDELA | 37,000 | 14,100 | 3,620 |
| DISTANCE | 385m | 237m | 120m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 10.5 hrs |

Strobe runs 1.5 hours



PROTAC HPL® USB



High performance, high-candela hand held flashlight

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- USB rechargeable (battery charges in the light)
- TEN-TAP® Programmable

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 1,000 | 400 | 65 |
| CANDELA | 35,000 | 14,100 | 2,250 |
| DISTANCE | 374m | 237m | 95m |
| RUN TIME | 1.5 hrs | 3.5 hrs | 24 hrs |

Strobe runs 3 hours

| Description | Item # |
|--|--------|
| ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Clam - Black | 88076 |
| ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Box - Black | 88077 |

| Size and Weight | Battery |
|-------------------------------|---|
| 7.08" (18 cm); 9.24 oz (262g) | Lithium-ion <i>uses the same battery</i> (#74175) as the Strion, also accepts SL-B26 battery pack or (2) CR123A lithium batteries |



PROTAC HL® USB



High-lumen, USB rechargeable tactical light

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- TEN-TAP® Programmable

| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 1,000 | 380 | 65 |
| CANDELA | 12,000 | 4,420 | 700 |
| DISTANCE | 219m | 133m | 53m |
| RUN TIME | 1.5 hrs | 3.5 hrs | 23 hrs |

Strobe runs 1.5 hours

| Description | Item # |
|--|--------|
| ProTac HL USB - 120V AC/12V DC and holster - Black | 88054 |
| ProTac HL USB - Includes USB cord - Black | 88052 |

| Size and Weight | Battery |
|-------------------------------|---|
| 6.5" (16.5 cm); 7.2 oz (204g) | Lithium-ion battery - <i>uses the same battery</i> (#74175) as the Strion; also SL-B26 battery pack or (2) CR123A lithium |



PROTAC® // POLYTAC® ACCESSORIES

| DESCRIPTION | ITEM # | PROTAC 1L-1AA | PROTAC 2AA-X USB | PROTAC 2.0 SERIES | PROTAC 2L | PROTAC 2L-X | PROTAC HL | PROTAC HL USB | PROTAC HL-X | PROTAC HPL USB | PROTAC HL 6 | PROTAC 1X | PROTAC | POLYTAC X |
|----------------------------------|--------|---------------|------------------|-------------------|-----------|-------------|-----------|---------------|-------------|----------------|-------------|-----------|--------|-----------|
| CR123A Batteries - 2pk | 85175 | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| CR123A Batteries - 6pk | 85180 | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| CR123A Batteries - 12pk | 85177 | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| CR123A Batteries - 400pk | 85179 | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| SL-B26 Battery Pack - 1pk | 22101 | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | | | | ✓ |
| SL-B50 Battery Pack - 1pk | 22111 | | | ✓ | | | | | | | | | | |
| Lithium Polymer Battery Pack | 88136 | | ✓ | | | | | | | | | | | |
| SL-B48 Battery Pack - 2pk | 88133 | | | | | | | | | | ✓ | | | |
| SL-B9 Battery Pack | 20237 | | | | | | | | | | | ✓ | | |
| Lithium-ion Battery | 74175 | | | | | | ✓ | ✓ | ✓ | | | | | |
| Li-Ion USB Battery Charge Cradle | 22100 | | | | | ✓ | | ✓ | ✓ | ✓ | | | | ✓ |
| 120V AC Charge Cord | 22071 | | | | | ✓ | | | ✓ | ✓ | | | | ✓ |
| 22" (55.88 cm) USB-C Cord | 22084 | | ✓ | ✓ | | ✓ | | | ✓ | ✓ | | | | ✓ |
| "Y" USB-C Cord | 22090 | | | | | | | | | | | ✓ | | |
| Nylon Holster | 88036 | ✓ | | | | ✓ | | | | | | | | |
| Nylon Holster | 88038 | | ✓ | | | | | | | | | | | |
| Nylon Holster | 88043 | | | | | | ✓ | | ✓ | | | | | |
| Nylon Holster | 88086 | | | ✓ | | | | | | | | | | |
| Nylon Holster | 85905 | | | | | | | | | | | ✓ | ✓ | ✓ |
| Tactical Holster | 88051 | | | | | | ✓ | ✓ | | | | | | |
| Helmet Mount | 68085 | | | | | | | | | | | ✓ | ✓ | |
| Poly Mount Kit | 68089 | | | | | | | | | | | ✓ | ✓ | |
| Filter - Red | 69115 | | | | | | | | | | | ✓ | | ✓ |
| Filter - Blue | 69116 | | | | | | | | | | | ✓ | | ✓ |
| Filter - Green | 69117 | | | | | | | | | | | ✓ | | ✓ |
| Filter - IR | 69118 | | | | | | | | | | | ✓ | | ✓ |
| Flip Lens - Red | 88115 | | | | | | | | | | | ✓ | | ✓ |
| Flip Lens - Blue | 85116 | | | | | | | | | | | ✓ | | ✓ |
| Flip Lens - Green | 85117 | | | | | | | | | | | ✓ | | ✓ |
| Flip Lens - IR | 74039 | | | | | | | | | | | ✓ | | ✓ |
| Red Safety Wand | 88057 | | | ✓ | | | ✓ | ✓ | ✓ | | | | | |
| Red Safety Wand | 61311 | | | | | | | ✓ | | | | ✓ | | |
| Red Safety Wand | 74903 | | | | | | | | | | | | ✓ | ✓ |
| Yellow Safety Wand | 74904 | | | | | | | | | | | | ✓ | ✓ |
| Glow in the Dark Safety Wand | 74913 | | | | | | | | | | | | ✓ | ✓ |
| Rubber Helmet Strap | 99075 | | | | | | | | | | | | ✓ | ✓ |



STREAMLIGHT®



POLYTAC® 1X

NEW

POLYTAC® 1X



Professional quality, multi-fuel flashlight with polymer construction for lightweight durability

- SL-B9 recharges in 2.5 hours via USB-C cord
- TEN-TAP® Programmable
- Removable, two way pocket clip


| | SL-B9 | | CR123A | | AA | |
|----------|--------|-------|---------|--------|-------|--------|
| | HIGH | LOW | HIGH | LOW | HIGH | LOW |
| LUMENS | 500 | 40 | 350 | 40 | 150 | 40 |
| CANDELA | 18,000 | 1,000 | 12,000 | 1,000 | 5,000 | 1,000 |
| DISTANCE | 268m | 63m | 219m | 63m | 141m | 63m |
| RUN TIME | 1 hrs | 8 hrs | 1.5 hrs | 14 hrs | 5 hrs | 14 hrs |

Strobe runs SL-B9: 1.75 hours // CR123A: 2.25 hours // AA: 7 hours



| Description | Item # | COO | TAA |
|---|--------|-----|-----|
| PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Black | 86000 | US | YES |
| PolyTac 1X - Includes (1) CR123A lithium and (1) AA alkaline battery - Yellow | 86002 | US | YES |
| PolyTac 1X USB - Includes (1) SL-B9 battery pack - Black | 86001 | US | YES |
| PolyTac 1X USB - Includes (1) SL-B9 battery pack - Yellow | 86003 | US | YES |

| Size and Weight | Battery |
|---|--|
| 4.71" (11.96 cm); SL-B9: 3.03 oz (85.9g) // CR123A: 2.93 oz (83.1g) // AA: 3.2 oz (90.7g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

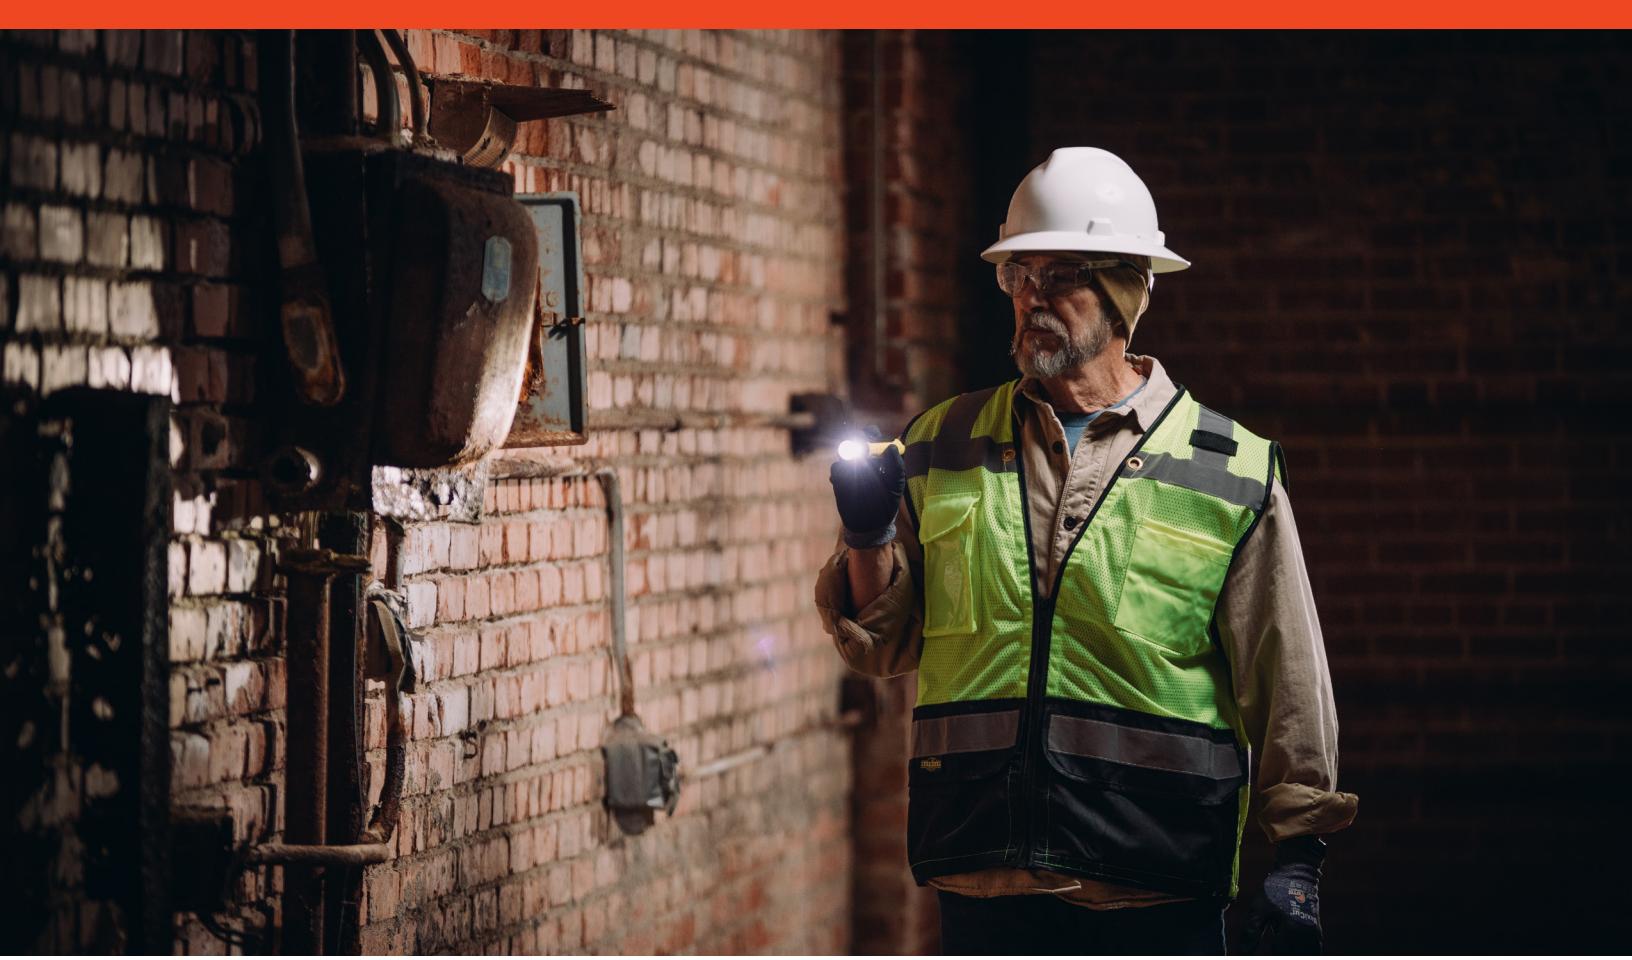

POLYTAC® X



Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

| | HIGH | MEDIUM | LOW |
|-----------------|----------|----------|--------|
| LUMENS | 600 | 260 | 35 |
| CANDELA | 11,485 | 4,930 | 675 |
| DISTANCE | 205m | 135m | 50m |
| RUN TIME CR123A | 2.75 hrs | 5.5 hrs | 34 hrs |
| RUN TIME SL-B26 | 3.5 hrs | 5.75 hrs | 36 hrs |

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)



Description

| | Clam | Box |
|--|-------|-------|
| PolyTac X - Includes (2) CR123A lithium batteries - Black | 88600 | 88603 |
| PolyTac X - Includes (2) CR123A lithium batteries - Yellow | 88601 | 88604 |
| PolyTac X - Includes (2) CR123A lithium batteries - Coyote | 88602 | 88605 |
| PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Black | 88610 | 88613 |
| PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Yellow | 88611 | 88614 |
| PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Coyote | 88612 | 88615 |

Size and Weight

Battery

5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)

(1) SL-B26 battery pack or
(2) CR123A lithium batteries

NFPA

Flashlight meets 500°F requirements of
NFPA 1970-14.2 (2025)

POLYTAC 90® X

Flexible, rugged flashlight with a right angled head

- Durable construction
- Integrated carabiner style D-ring for a variety of attachment methods
- Multi-fuel with built in battery life indicator



| | HIGH | LOW |
|-----------------|----------|--------|
| LUMENS | 500 | 85 |
| CANDELA | 7,000 | 1,050 |
| DISTANCE | 167m | 64m |
| RUN TIME CR123A | 2.5 hrs | 12 hrs |
| RUN TIME SL-B26 | 3.75 hrs | 19 hrs |



| Description | Orange | Yellow | Black |
|---|--------|--------|-------|
| PolyTac 90 X - Includes (2) CR123A lithium batteries | 88834 | 88831 | 88830 |
| PolyTac 90 X - Includes (2) CR123A lithium batteries and Gear Keeper | 88832 | -- | -- |
| PolyTac 90 X USB - Includes (1) SL-B26 battery pack and USB cord | 88838 | 88836 | 88835 |
| PolyTac 90 X USB - Includes (1) SL-B26 battery pack, Gear Keeper and USB cord | 88837 | -- | -- |

| Size and Weight | Battery |
|---|---|
| 4.43" (11.25 cm); SL-B26: 4.8 oz (136g) // CR123A: 4.3 oz (122g) | (1) SL-B26 battery pack; or (2) CR123A lithium batteries |

POLYTAC®

All purpose flashlight designed for the broadest range of lighting applications at the best value

- Superior grip texture for comfortable/slip resistant feel
- TEN-TAP® Programmable
- Maximum light output throughout battery life

| Description | Item # |
|--|--------|
| PolyTac - Includes (2) CR123A lithium batteries - Black | 88850 |
| PolyTac - Includes (2) CR123A lithium batteries - Coyote | 88851 |
| PolyTac - Includes (2) CR123A lithium batteries - Yellow | 88853 |

| Size and Weight | Battery |
|---------------------------------|------------------------------|
| 5.34" (13.56 cm); 4.2 oz (121g) | (2) CR123A lithium batteries |



| | HIGH | MEDIUM | LOW |
|----------|----------|---------|--------|
| LUMENS | 600 | 260 | 35 |
| CANDELA | 11,500 | 4,900 | 675 |
| DISTANCE | 214m | 140m | 52m |
| RUN TIME | 2.75 hrs | 5.5 hrs | 34 hrs |

Strobe runs 5.5 hours



NFPA

Meets requirements of
NFPA 1970-14.2 (2025)

IMPROVE SUSTAINABILITY & LOWER COST THROUGH STREAMLIGHT RECHARGEABILITY

Switching just one alkaline battery powered flashlight to a Streamlight rechargeable can save hundreds of pounds of carbon emissions and chemical battery waste per year.

99%

Carbon Footprint Reduction
Switching from AA Alkaline to
Rechargeable

20%

Life Cycle Cost Savings in
the First Year

42 LBS.

Chemical Battery Waste
Spared from Landfills



SL-B50® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK


The battery that was designed for select Streamlight products

- Features USB-C input and charge status indicators; recharges in 6 hours
- Integrated safety circuit protects battery from overcharge



| Description | Item # |
|---|--------|
| SL-B50 Li-Ion USB rechargeable battery pack - 1pk | 22111 |
| SL-B50 Li-Ion USB rechargeable battery pack - 2pk | 22112 |
| 22" (55.88 cm) USB-C Cord | 22084 |

| Size and Weight | Battery |
|-----------------------------|---|
| 3.26" (8.28 cm); 3 oz (85g) | 4900mAh SL-B26 protected Li-Ion USB rechargeable battery pack |

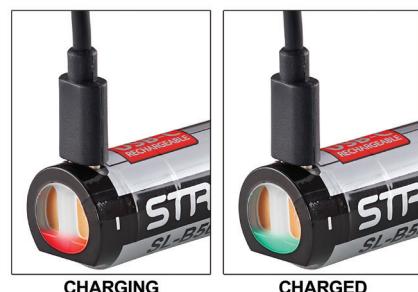


SL-B26® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

| Description | Item # |
|---|--------|
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk | 22101 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk | 22102 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk - Box | 22104 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk | 22105 |
| SL-B26 Charge Cradle | 22100 |
| SL-B26 Charger Kit - Includes USB Cord and (2) SL-B26 battery packs | 22010 |
| SL-B26 Charger Kit - Includes 120V AC and (2) SL-B26 battery packs | 22011 |
| 40" (106.1 cm) USB Cord - for use with the charger kit | 22070 |
| 22" (55.88 cm) USB Cord - for use with the charger kit | 22081 |
| 40" (106.1 cm) USB-C Cord - for use with the SL-B26 battery pack | 22091 |
| 22" (55.88 cm) USB-C Cord - for use with the SL-B26 battery pack | 22084 |

| Size and Weight | Battery |
|---------------------------------------|--------------------------------------|
| 2.75" (7 cm); 1.7 oz (48g) - Battery | 2600mAh SL-B26 protected |
| 4.5" (11.4 cm); 2.4 oz (68g) - Cradle | Li-Ion USB rechargeable battery pack |

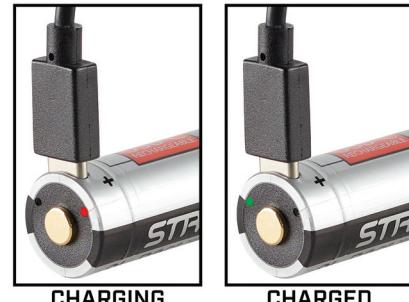

Charge status LEDs:
Red = charging Green = charged



EIGHT-UNIT SL-B26® BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

| Description | Item # |
|--|--------|
| 8-Unit SL-B26 Bank Charger - 120V AC | 20221 |
| 8-Unit SL-B26 Bank Charger - 12V DC | 20220 |
| 8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 120V AC | 20224 |
| 8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 12V DC | 20223 |
| 120V AC Cord | 44909 |
| 12V DC Cord | 44923 |



NFPA

Meets requirements of
NFPA 1900-11.1.11.2 (2024);
mounted in upright position

| Size and Weight |
|---|
| 10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm) |
| 7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries |




SIDEWINDER® SERIES

SIDEWINDER STALK®



Military helmet light system with flexible stalk

- Provides ultimate maneuverability, multiple mounting options, and a flexible stalk to aim the beam
- Features white, IR, red, blue, and green LEDs – all located in the head mounted on a flexible stalk – each with low, medium, high, and strobe modes along with an additional IR/IFF beacon
- A separate Identification Friend or Foe (IFF) switch lets you use both the main light and IFF when needed

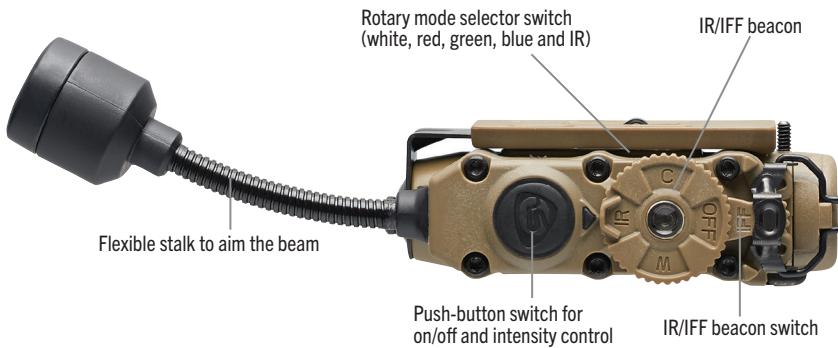

The Sidewinder Stalk can be configured to mount on any type of combat, vehicle crew or aviation helmet system and/or MOLLE vest platform, or be directly attached to the brim of a patrol cap.

#14303 - Sidewinder Stalk Helmet Clip

Durable belt/clothing clip with integral helmet mount features



#14304 - Sidewinder Stalk ARC Rail Clip

ARC Rail Clip



#14305 - Sidewinder Stalk ARC Rail Mount

Hook and loop adapter plate



High 100% Output - CR123A

| | WHITE LED | IR LED | RED LED | BLUE LED | GREEN LED | 3535 IFF IR IED |
|-----------------|-----------|---------------------------------------|---------|----------|-----------|---------------------------------------|
| LUMENS | 76 | 5.0 lmW/sr (min) radiant intensity | 9 | 8 | 20 | 5.0 lmW/sr (min) radiant intensity |
| DISTANCE | 28m | --- | 7m | 8m | 12m | --- |
| RUN TIME | 5.6 hrs | 32 hrs | 19 hrs | 13 hrs | 13 hrs | 21 hrs |

High 100% Output - AA LITHIUM/ALKALINE

| | WHITE LED | IR LED | RED LED | BLUE LED | GREEN LED | 3535 IFF IR IED |
|--------------------------|-----------|---------------------------------------|---------|----------|-----------|---------------------------------------|
| LUMENS | 57 | 5.0 lmW/sr (min) radiant intensity | 9 | 8 | 20 | 5.0 lmW/sr (min) radiant intensity |
| DISTANCE | 23m | --- | 7m | 8m | 12m | --- |
| RUN TIME Lithium | 6 hrs | 33 hrs | 19 hrs | 13 hrs | 13 hrs | 32 hrs |
| RUN TIME Alkaline | 3.8 hrs | 20 hrs | 10 hrs | 6 hrs | 5 hrs | 19 hrs |

SIDEWINDER STALK BATTERY RUN TIME

| CR123A LITHIUM BATTERY | | | | |
|-------------------------------|---------------------------------|-------------------------------|-------------------------------|--------------------------------|
| LED | LOW | MEDIUM | HIGH | STROBE |
| WHITE | 95 hrs | 15 hrs | 5.6 hrs | 11 hrs |
| RED | 112 hrs | 36 hrs | 19 hrs | 34 hrs |
| GREEN | 80 hrs | 27 hrs | 13 hrs | 25 hrs |
| BLUE | 80 hrs | 27 hrs | 13 hrs | 25 hrs |
| IR | 174 hrs | 57 hrs | 32 hrs | 61 hrs |
| IR W/ IFF BEACON | 150 hrs | 40 hrs | 21 hrs | 43 hrs |
| AA LITHIUM / ALKALINE BATTERY | | | | |
| LED | 79 hrs (lith) 66 hrs (alk) | 16 hrs (lith) 8 hrs (alk) | 6 hrs (lith) 3.8 hrs (alk) | 11 hrs (lith) 5.5 hrs (alk) |
| WHITE | 79 hrs (lith) 66 hrs (alk) | 16 hrs (lith) 8 hrs (alk) | 6 hrs (lith) 3.8 hrs (alk) | 11 hrs (lith) 5.5 hrs (alk) |
| RED | 109 hrs (lith) 85 hrs (alk) | 36 hrs (lith) 24 hrs (alk) | 19 hrs (lith) 10 hrs (alk) | 36 hrs (lith) 25 hrs (alk) |
| GREEN | 84 hrs (lith) 55 hrs (alk) | 26 hrs (lith) 15 hrs (alk) | 13 hrs (lith) 5 hrs (alk) | 23 hrs (lith) 17 hrs (alk) |
| BLUE | 77 hrs (lith) 61 hrs (alk) | 25 hrs (lith) 16 hrs (alk) | 13 hrs (lith) 6 hrs (alk) | 25 hrs (lith) 18 hrs (alk) |
| IR | 173 hrs (lith) 145 hrs (alk) | 55 hrs (lith) 39 hrs (alk) | 33 hrs (lith) 20 hrs (alk) | 60 hrs (lith) 41 hrs (alk) |
| IR W/ IFF BEACON | 187 hrs (lith) 115 hrs (alk) | 51 hrs (lith) 38 hrs (alk) | 32 hrs (lith) 19 hrs (alk) | 47 hrs (lith) 35 hrs (alk) |

| Description | Item # |
|--|--------|
| Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Coyote - Mailer | 14300 |
| Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Black - Mailer | 14310 |
| Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, (1) CR123A and (1) AA alkaline battery - Coyote - Mailer | 14301 |
| Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, (1) CR123A and (1) AA alkaline battery - Black - Mailer | 14311 |
| Sidewinder Stalk - Includes helmet clip, E-Mount, (1) CR123A and (1) AA alkaline batteries - Coyote - Mailer | 14302 |
| Sidewinder Stalk - Includes helmet clip, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box | 14306 |
| Sidewinder Stalk - Includes ARC rail mount and assembly, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box | 14307 |
| Sidewinder Stalk - Includes helmet clip, E-Mount, (1) CR123A and (1) AA alkaline batteries - Coyote - Retail Box | 14308 |

| Size and Weight | Battery |
|--|--|
| 5.5" (14 cm); AA battery w/Loop and Hook Adapter: 2.88 oz (81.65g) // CR123A battery w/Loop and Hook Adapter: 3.2 oz (90.7g) | (1) AA alkaline or lithium or (1) CR123A lithium batteries |

SIDEWINDER® X



Multi-fuel, high-output military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Fits existing Sidewinder helmet mounts and adapters

| | HIGH | MEDIUM 2 | MEDIUM 2 | LOW |
|--------------------------|----------|----------|----------|----------|
| LUMENS | 275 | 80 | 35 | 5 |
| CANDELA | 3,200 | 900 | 400 | 50 |
| DISTANCE | 113m | 60m | 40m | 14m |
| RUN TIME Alkaline | 4.75 hrs | 13 hrs | 30 hrs | 150+ hrs |
| RUN TIME CR123A | 2.75 hrs | 8 hrs | 19 hrs | 100+ hrs |

Strobe runs 10.5 hours (AA) // 5.75 hours (CR123A)



MILITARY MODEL




AVIATION MODEL



USER CONFIGURABLE MODEL



(user chooses between red, green, or blue)

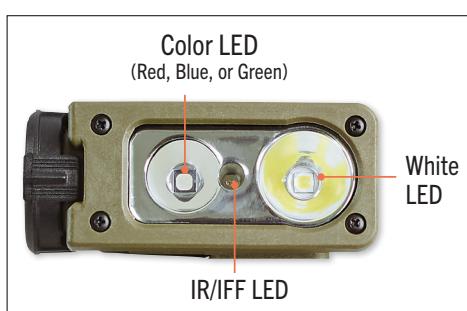

Push button on/off switch and rotary selector knob

Gear clip with integrated helmet mount features

Multiple mounting options for your helmet



Description

Item

| | |
|--|-------|
| Sidewinder X - UC (User Configurable) Model - Includes (2) AA alkaline batteries - Coyote | 14803 |
| Sidewinder X - Military Model - Includes E-Mount and (2) AA alkaline batteries - Coyote | 14800 |
| Sidewinder X - Military Model - Includes (2) AA alkaline batteries - Coyote | 14801 |
| Sidewinder X - Aviation Model - Includes MOLLE retainer and (2) AA alkaline batteries - Coyote | 14802 |

**Military Model: white, red, blue IR LEDs // Aviation Model: white, green, blue IR LEDs // UC Model: user chooses between red, green, or blue*

Size and Weight

Battery

2.4" (11.7 cm); CR123A: 3.3 oz (93.6g) // (2) AA alkaline batteries or (1) CR123A lithium for extended operation in extreme temps (-40°F to +150°F)

IR & Color LEDs

| | IR | RED | BLUE | GREEN |
|--------------------------|------------------------------------|-----|------|------------------------------------|
| HIGH MODE | | | | |
| LUMENS | 50mW | 6.5 | 2.0 | 8.0 |
| CANDELA | --- | 40 | 12 | 83 |
| DISTANCE | --- | 13m | 7m | 18m |
| RUN TIME Alkaline | 40 hrs | | | 50 hrs |
| RUN TIME CR123A | 20 hrs | | | 30 hrs |
| LOWER MODE | | | | |
| MED 2 (80%) | 130 hrs (AA) 65 hrs (CR123A) | | | 100 hrs (AA) // 70 hrs (CR123A) |
| MED 1 (25%) | 330 hrs (AA) 170 hrs (CR123A) | | | 250 hrs (AA) // 150 hrs (CR123A) |
| LOW (5%) | 600+ hrs (AA) 300+ hrs (CR123A) | | | 300+ hrs (AA) // 200+ hrs (CR123A) |
| STROBE | | | | 100+ hrs (AA) // 50+ hrs (CR123A) |

SIDEWINDER®



High-impact, hands-free military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Gear clip to allow for ideal positioning of the light

| HIGH | |
|----------|---------|
| LUMENS | 55 |
| CANDELA | 1,175 |
| DISTANCE | 69m |
| RUN TIME | 5.5 hrs |



Description

| Description | Item # |
|--|--------|
| Sidewinder Military - Includes (2) AA alkaline batteries - Clam - Coyote | 14000 |
| Sidewinder Military - Includes (2) AA alkaline batteries - Box - Coyote | 14032 |
| Sidewinder Military - Includes helmet mount and (2) AA alkaline batteries - Clam - Coyote | 14027 |
| Sidewinder Military - Includes E-mount and (2) AA alkaline batteries - Clam - Coyote | 14031 |
| Sidewinder Military - Includes paracord and (2) AA alkaline batteries - Clam - Coyote | 14072 |
| Sidewinder Aviation - Includes (2) AA alkaline batteries - Clam - Coyote | 14008 |
| Sidewinder Aviation - Includes MOLLE retainer and (2) AA alkaline batteries - Box - Coyote | 14024 |

**Military Model: white, red, blue IR LEDS // Aviation Model: white, green, blue IR LEDS

Size and Weight

| Size and Weight | Battery |
|---|--|
| 4.65" (11.81 cm); Lithium: 4.38 oz (124g) // Alkaline: 5.02 oz (142g) | (2) AA alkaline or AA lithium for extended operation in extreme temperatures (-40°F to +150°F) |

SIDEWINDER® RESCUE



A lightweight hands-free lighting tool with four different color LEDs, each with varying intensities for a wide variety of tasks

- Flashing beacon coupled with "Slide-in-Place" diffuser projects omni-directional light to signal for help
- Securely attached to MOLLE or other straps using MOLLE retainer
- Rescue Model includes white, green, blue and IR LEDs with diffuser

Description

| Description | Item # |
|---|--------|
| Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Box - Coyote | 14065 |
| Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Clam - Coyote | 14069 |
| Sidewinder Rescue - Includes (2) AA alkaline batteries - Box - Coyote | 14066 |
| Sidewinder Rescue - Includes (2) AA alkaline batteries - Clam - Coyote | 14067 |
| Sidewinder Rescue - Includes E-Mount and (2) AA alkaline batteries - Box - Coyote | 14068 |

Size and Weight

| Size and Weight | Battery |
|---|--|
| 4.65" (11.81 cm); Lithium: 4.38 oz (124g) // Alkaline: 5.02 oz (142g) | (2) AA alkaline or AA lithium for extended operation in extreme temperatures (-40°F to +150°F) |



Aluminum plate provides flat surface to adhere Velcro® for attaching to helmet



Cord attachment for paracord lanyard, which provides extra security from loss of light and allows it to be worn around the neck



SIDEWINDER BOOT®



Durable, hands-free task flashlight used as a standard light for boot camp, recruit/basic training and wherever extra military instruction occurs

- Super-tough, high-impact polymer case that's durable and weather resistant
- Includes an integrated red filter that slides into place when needed



| Description | Item # |
|---|--------|
| Sidewinder Boot - Includes (2) AA alkaline batteries - Coyote | 14975 |

| Size and Weight | Battery |
|--|-------------------------------|
| 4.29" (10.9 cm); Lithium: 2.88 oz (82g) // (2) AA alkaline or Alkaline: 3.52 oz (100g) | (2) AA alkaline or AA lithium |

| | HIGH | LOW |
|----------|-------|--------|
| LUMENS | 55 | 7 |
| CANDELA | 1000 | 140 |
| DISTANCE | 63m | 24m |
| RUN TIME | 8 hrs | 90 hrs |

SIDEWINDER COMPACT® III



Extremely versatile military light with 185° tilting head for multiple tasks

- White, red, blue, green and IR LEDs (see below for specific model)
- Fits in the palm of your hand or clips to MOLLE vest, belt, hat or pocket
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Meets MIL-STD-810H, METHOD 512.4



Optional helmet mount accessories available

| Description | Item # |
|--|--------|
| Sidewinder Compact III User Configurable (UC) Model - Includes high offset ARC rail mount, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14210 |
| Sidewinder Compact III User Configurable (UC) Model - Includes Hook & Loop Mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14211 |
| Sidewinder Compact III User Configurable (UC) Model - Includes E-Mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14519 |
| Sidewinder Compact III User Configurable (UC) Model - Includes (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14213 |
| Sidewinder Compact III Military Model - Includes E-mount, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14510 |
| Sidewinder Compact III Military Model - Includes E-mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14513 |
| Sidewinder Compact III Military Model - Includes (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14516 |
| Sidewinder Compact III Aviation Model - Includes NVG mount (works with HGU-84 rotary wing air crew helmets), (1) AA alkaline battery and (1) CR123A lithium battery - Coyote | 14533 |

**Military Model: white, red, blue IR LEDs // Aviation Model: white, green, blue IR LEDs // UC Model: user chooses between red, green, or blue

| Size and Weight | Battery |
|---|--|
| 2" (5.1 cm); AA: 3 oz (85g) // CR123A: 2.7 oz (76.5g) | (1) CR123A lithium, (1) AA alkaline, or (1) AA lithium battery |

| | Alkaline White LED | | | | CR123A White LED | | | |
|----------|--------------------|-------|--------|---------|------------------|-------|--------|----------|
| | HIGH | MED 2 | MED 1 | LOW | HIGH | MED 2 | MED 1 | LOW |
| LUMENS | 140 | 85 | 35 | 4 | 275 | 80 | 35 | 5 |
| CANDELA | 1,800 | 1,000 | 450 | 60 | 3,200 | 900 | 400 | 50 |
| DISTANCE | 85m | 63m | 42m | 15m | 113m | 60m | 40m | 14m |
| RUN TIME | 4 hrs | 6 hrs | 10 hrs | 70+ hrs | 2.75 hrs | 8 hrs | 19 hrs | 100+ hrs |

Strobe runs 8 hrs (Alkaline) // 5.75 hrs (CR123A)

| | IR and Color LEDs | | | | |
|-------------|-----------------------------------|------|------------------------------------|-------|-----|
| | IR | RED | BLUE | GREEN | |
| HIGH MODE | LUMENS | 50mW | 6.5 | 2.0 | 8.0 |
| CANDELA | --- | 40 | 12 | 83 | |
| DISTANCE | --- | 13m | 7m | 18m | |
| RUN TIME | 20 hrs (AA) 20 hrs (CR123A) | | 25 hrs (AA) // 30 hrs (CR123A) | | |
| MED 2 (60%) | 65 hrs (AA) 65 hrs (CR123A) | | 45+ hrs (AA) // 70 hrs (CR123A) | | |
| MED 1 (25%) | 150 hrs (AA) 170 hrs (CR123A) | | 110+ hrs (AA) // 150 hrs (CR123A) | | |
| LOW (5%) | 250 hrs (AA) 300+ hrs (CR123A) | | 250+ hrs (AA) // 200+ hrs (CR123A) | | |
| STROBE | | | 40+ hrs (AA) // 50+ hrs (CR123A) | | |

SIDEWINDER® ACCESSORIES

| DESCRIPTION | ITEM # | SIDEWINDER X | SIDEWINDER | SIDEWINDER COMPACT III | SIDEWINDER STALK | SIDEWINDER BOOT |
|---|--------|--------------|------------|------------------------|------------------|-----------------|
| Helmet Clip - Black | 14303 | | | | ✓ | |
| ARC Rail Clip - Coyote | 14304 | | | | ✓ | |
| ARC Rail Mount - Coyote | 14305 | | | | ✓ | |
| Rail Mount Adapter for Helmet - Coyote | 14057 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Hook and Loop Mount | 14073 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Contour ARC Rail Mount | 14114 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Sidewinder High Offset ARC Mount | 14115 | ✓ | ✓ | ✓ | ✓ | |
| Night Vision Goggle Mount - Tactical (works with DoD, NATO, and ISAF combat helmets) | 14155 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Night Vision Goggle Mount - Aviation (works with HGU-84 rotary wing air crew helmets) | 14135 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Safety Wand - Glow in the Dark | 14902 | | ✓ | | | |
| Elastic Headstrap | 14059 | ✓ | ✓ | ✓ | | ✓ |
| E-Mount (ACH, ECH, MICH, LWH compatible) | 14136 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Paracord | 14138 | ✓ | ✓ | ✓ | | ✓ |
| E-Mount Kit - Includes E-mount, headstrap, and MOLLE plate | 14112 | ✓ | ✓ | ✓ | | ✓ |
| Rail Mount Kit - Includes rail mount, headstrap and MOLLE plate | 14113 | ✓ | ✓ | ✓ | | ✓ |
| MOLLE Retainer Replacement | 14030 | ✓ | ✓ | ✓ | | |
| CR123A Lithium Batteries - 2 pack | 85175 | ✓ | ✓ | ✓ | ✓ | |
| CR123A Lithium Batteries - 6 pack | 85180 | ✓ | ✓ | ✓ | ✓ | |
| CR123A Lithium Batteries - 12 pack | 85177 | ✓ | ✓ | ✓ | ✓ | |
| CR123A Lithium Batteries - 400 pack | 85179 | ✓ | ✓ | ✓ | ✓ | |



14303



14304



14305



14057



14073



14114



14155



14135



14902



14059



14136



14138



14112



14113



14030



85175, 85180,
85177, 85179



HEADLAMP SERIES

ENDURO® PRO USB



Rechargeable headlamp with spot and flood beams

- Spot and flood modes- each with high, medium and low
- Multi-function switch remembers the last mode used
- Two mounting options for industrial hard hats - as shown below

Industrial model:

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



| Spot | HIGH | MEDIUM | LOW |
|-----------------|----------|--------|--------|
| LUMENS | 200 | 90 | 25 |
| CANDELA | 2,080 | 890 | 250 |
| DISTANCE | 91m | 60m | 32m |
| RUN TIME | 6.25 hrs | 19 hrs | 48 hrs |



| Description | Item # |
|--|--------|
| Enduro Pro USB - Includes USB cord, elastic headstrap - Yellow | 61435 |
| Enduro Pro USB - Includes USB cord, elastic and hard hat strap and 3M® Dual Lock® - Yellow | 61436 |

3M® and Dual Lock® are a registered Trademarks of the 3M Company

| Size and Weight | Battery |
|--------------------------------|-----------------|
| 2.19" (5.56 cm); 3.6 oz (102g) | Lithium polymer |

| Flood | HIGH | MEDIUM | LOW |
|-----------------|-------|--------|--------|
| LUMENS | 145 | 50 | 15 |
| CANDELA | 220 | 80 | 30 |
| DISTANCE | 30m | 18m | 11m |
| RUN TIME | 7 hrs | 21 hrs | 48 hrs |

ENDURO® PRO



Compact, multi-purpose headlamp

- Spot and flood modes- each with high, medium and low
- Multi-function switch remembers the last mode used
- Coyote model features white and green LEDs; yellow model features white and red LEDs

| Spot | HIGH | MEDIUM | LOW |
|-----------------|-------|--------|--------|
| LUMENS | 200 | 75 | 25 |
| CANDELA | 2,250 | 825 | 300 |
| DISTANCE | 95m | 57m | 35m |
| RUN TIME | 6 hrs | 14 hrs | 38 hrs |

Yellow Model:
White /Red LED



Industrial model:

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



| Description | Item # |
|---|--------|
| Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Clam - Yellow | 61420 |
| Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Box - Yellow | 61421 |
| Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Clam - Coyote | 61425 |
| Enduro Pro - Includes rubber and elastic straps, (3) AAA alkaline batteries and 3M® Dual® Lock - Box - Yellow | 61422 |

3M® and Dual Lock® are registered Trademarks of the 3M Company

| Size and Weight | Battery |
|---|--|
| 2.19" (5.56 cm); Alkaline: 3.4 oz (96.38g) // Lithium: 3 oz (85.04g) | (3) AAA alkaline or lithium batteries |

ENDURO®



Lightweight and super comfortable headlamp

- Low profile headlamp
- Integrated rubber/elastic head strap for versatility
- Unbreakable polycarbonate lens

| Description | Item # |
|--|--------|
| Enduro - Includes (2) AAA alkaline batteries, visor clip and elastic headstrap - Black | 61400 |

| Size and Weight | Battery |
|------------------------------|----------------------------|
| 1.6" (4 cm); 2.75 oz (78.5g) | (2) AAA alkaline batteries |

| | HIGH | LOW |
|-----------------|---------|--------|
| LUMENS | 50 | 10 |
| CANDELA | 1,100 | 285 |
| DISTANCE | 66m | 33m |
| RUN TIME | 5.5 hrs | 25 hrs |





SL-SIDESADDLE® // SL-SIDESADDLE® USB



Universal helmet light designed to mount directly to a wide variety of head gear including hard hats, helmets and baseball hats

- Charge and/or replace the batteries without removing from the mount
- Use the “quick release” tab to detach the light for hand-held use while the strap system remains securely in place
- Universal strap leaves slots open/available to integrate with other accessories
- Integrated tail switch with blue LED for easy control and enhanced visibility
- Push-button switch with mode memory recalls your last setting



ALKALINE MODEL



USB MODEL

| | SPOT | | FLOOD | | COMBO | |
|----------|----------|--------|---------|--------|-------|----------|
| | HIGH | LOW | HIGH | LOW | HIGH | LOW |
| LUMENS | 250 | 60 | 235 | 60 | 300 | 110 |
| CANDELA | 2,500 | 715 | 215 | 55 | 1,900 | 660 |
| DISTANCE | 100m | 53m | 29m | 15m | 87m | 51m |
| RUN TIME | 6.75 hrs | 12 hrs | 6.5 hrs | 16 hrs | 5 hrs | 6.75 hrs |

| | SPOT | | FLOOD | | COMBO | |
|----------|----------|--------|-------|--------|-------|-------|
| | HIGH | LOW | HIGH | LOW | HIGH | LOW |
| LUMENS | 350 | 100 | 325 | 85 | 400 | 160 |
| CANDELA | 4,250 | 1,200 | 300 | 75 | 2,400 | 960 |
| DISTANCE | 130m | 69m | 35m | 17m | 98m | 62m |
| RUN TIME | 6.25 hrs | 12 hrs | 7 hrs | 12 hrs | 5 hrs | 7 hrs |

| Description | Yellow | Black |
|--|--------|-------|
| SL-SideSaddle - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap) and (3) AAA alkaline batteries | 61630 | 61620 |
| SL-SideSaddle Hat Light - Includes (3) AAA alkaline batteries and hat mount | 61636 | 61626 |

| Description | Yellow | Black |
|---|--------|-------|
| SL-SideSaddle USB - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap), USB-C cord and (1) lithium polymer battery | 61631 | 61621 |
| SL-SideSaddle USB Hat Light - Includes (1) lithium polymer battery, USB-C cord and hat mount | 61637 | 61627 |

| Size and Weight | Battery |
|---------------------------|----------------------------|
| 3" (7.6 cm); 3.4 oz (95g) | (3) AAA alkaline batteries |

| Size and Weight | Battery |
|---------------------------|-----------------------------|
| 3" (7.6 cm); 3.1 oz (88g) | (1) Lithium polymer battery |



ADAPTABLE.
RELIABLE.

A UNIVERSAL FIT SL-SIDESADDLE®, HAT & HELMET COMPATIBLE.

Safety Helmets



Accessories included:



1. Feed the "Y" strap (A) through the bottom of the helmet, ensuring the logo is facing out
2. Loop the baseplate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (fits around the earmuff) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

Hats and Bump Caps



Accessories included:




1. Unscrew the threaded pins on the rear mounting bracket (C)
2. Place in desired location on the inside of the hat
3. Place the top mounting bracket (D) on top of the pins and lock the thumb screws in place
4. Swivel and adjust the light to where you want it

Full Brim Hard Hats



Accessories included:



1. Feed the strap (E) through the bottom of the hard hat, ensuring the logo is facing out
2. Loop the baseplate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (F) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

Traditional Hard Hats



ENDURO® PRO HAZ-LO®



Intrinsically safe with spot and flood modes

- Class 1, Div. 1 safety ratings
- Multi-function switch
- 45° tilting head

| | SPOT | FLOOD | COMBO |
|----------|-------|-------|----------|
| LUMENS | 160 | 160 | 235 |
| CANDELA | 1,320 | 100 | -- |
| DISTANCE | 73m | 20m | -- |
| RUN TIME | 5 hrs | 5 hrs | 4.75 hrs |



Class 1, II, Div. 1, Grps. A, B, C, D, E, F, G;
Class III, Class 1, Zn O, Grps. IIC, Exia
T-Code: T4



Permissible Portable Headlamp Assembly
App. No. 20-A070001-0
Tested for use in methane-air mixtures only

| Description | Item # |
|---|--------|
| Enduro Pro HAZ-LO - Includes (3) AAA alkaline batteries, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow | 61424 |

| Size and Weight | Battery |
|---------------------------------|------------------|
| 2.19" (5.56 cm); 3.5 oz (99.2g) | (3) AAA alkaline |

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



3AA HAZ-LO® HEADLAMP



Intrinsically safe alkaline battery operated headlamp

- Class 1, Div. 1 safety ratings
- Long-running, high performance headlamp
- Exceptional light output

| | |
|----------|-------|
| LUMENS | 270 |
| CANDELA | 5,600 |
| DISTANCE | 150m |
| RUN TIME | 8 hrs |



| Description | Item # |
|--|--------|
| 3AA HAZ-LO - Includes rubber and elastic headstraps and (3) alkaline AA batteries - Yellow | 61200 |

| Size and Weight | Battery |
|--------------------------------|---------------------------|
| 3.08" (7.82 cm); 7.1 oz (202g) | (3) AA alkaline batteries |



Class I, Div. 1, Grps. A, B, C, D;
Class II, Div. 1, Grps. E, F, G
Class III, T-Code: T4



USB HAZ-LO® HEADLAMP

Rechargeable, Class 1, Div 1 headlamp

- Multiple modes cover a variety of tasks with just one light; spot, flood and combo
- Charge indicator LEDs: Red=charging; Green=charged; charges in 4.5 hours
- Multi-function switch is easy to use

| | SPOT | FLOOD | COMBO |
|-----------------|---------|--------|-------|
| LUMENS | 190 | 120 | 250 |
| CANDELA | 2,000 | 90 | -- |
| DISTANCE | 89m | 19m | -- |
| RUN TIME | 7.5 hrs | 13 hrs | 7 hrs |



Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G
Class III, CL 1, Zn O, IIC
T-Code: T4

| Description | Item # |
|---|--------|
| USB HAZ-LO Headlamp - Includes 120V AC cord, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow | 61460 |
| USB HAZ-LO Headlamp - 120V AC charge cradle, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow | 61463 |

| Size and Weight | Battery |
|----------------------------------|-------------|
| 1.72" (4.36 cm); 4.1 oz (116.2g) | Lithium-ion |

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting





PROTAC® HL USB HEADLAMP



PROTAC® HL HEADLAMP



These high-lumen headlamps are the perfect flashlight for when your task requires both hands and a bright light with a wide beam; rechargeable and non-rechargeable options available

- Multi-fuel design; uses the same battery as the Strion (#74175) or SL-B26 rechargeable battery pack
- TEN-TAP® Programmable
- 90° tilting head reduces head fatigue

- Offers a broad beam for maximum light coverage
- TEN-TAP® Programmable
- 90° tilting head reduces head fatigue

1000
LUMENS



| | HIGH | MEDIUM | LOW |
|-----------------|---------|----------|--------|
| LUMENS | 1,000 | 400 | 65 |
| CANDELA | 13,500 | 5,400 | 900 |
| DISTANCE | 232m | 147m | 60m |
| RUN TIME | 1.5 hrs | 2.75 hrs | 20 hrs |

| | HIGH | MEDIUM | LOW |
|-----------------|----------|--------|--------|
| LUMENS | 635 | 105 | 20 |
| CANDELA | 8,500 | 1,450 | 280 |
| DISTANCE | 184m | 76m | 33m |
| RUN TIME | 1.75 hrs | 8 hrs | 36 hrs |

| Description | Item # |
|---------------------------------------|--------|
| ProTac HL USB Headlamp - Clam - Black | 61305 |
| ProTac HL USB Headlamp - Box - Black | 61307 |

| Size and Weight | Battery |
|---------------------------------|---|
| 4.03" (10.24 cm); 8.1 oz (230g) | Lithium-ion; also accepts SL-B26 battery pack |

| Description | Item # |
|--|--------|
| ProTac HL Headlamp - Includes rubber and elastic headstraps and (2) CR123A lithium batteries - Black | 61304 |

| Size and Weight | Battery |
|--------------------------------|--------------------|
| 3.66" (9.29 cm); 6.6 oz (187g) | (2) CR123A lithium |

PROTAC® 2.0 HEADLAMP



IP64

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable

| | HIGH | MEDIUM | LOW |
|----------|----------|---------|--------|
| LUMENS | 2,000 | 650 | 110 |
| CANDela | 14,500 | 4,200 | 750 |
| DISTANCE | 241m | 130m | 55m |
| RUN TIME | 2.25 hrs | 4.5 hrs | 25 hrs |



| Description | Item # |
|---|--------|
| ProTac 2.0 Headlamp - Includes (1) SL-B50 battery pack, USB-C cord, elastic and rubber straps - Black | 89001 |

| Size and Weight | Battery |
|------------------------------------|-------------------------|
| 4.92" (12.5 cm); 10.48 oz (297.1g) | (1) SL-B50 battery pack |



TRIDENT®

Multi-purpose headlamp with a long run time on low

- Versatility of switching between modes
- Multi-function switch remembers the last mode used
- 90° tilting head



| Description | Item # |
|--|--------|
| Trident - White LEDs - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow | 61050 |
| Trident - White and Green LEDs - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Green | 61051 |

| Size and Weight | Battery |
|------------------------------|----------------------------|
| 2.4" (6.9 cm); 5.5 oz (156g) | (3) AAA alkaline batteries |

| White LED | HIGH | MEDIUM | LOW |
|-----------------|-------|--------|--------|
| LUMENS | 80 | 35 | 11 |
| CANDELA | 4,000 | 385 | 120 |
| DISTANCE | 126m | 39m | 22m |
| RUN TIME | 5 hrs | 10 hrs | 53 hrs |

| Green LED | HIGH | MEDIUM | LOW |
|-----------------|-------|----------|--------|
| LUMENS | 80 | 25 | 6 |
| CANDELA | 4,000 | 275 | 55 |
| DISTANCE | 126m | 33m | 15m |
| RUN TIME | 5 hrs | 19.5 hrs | 63 hrs |



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G
Class III, T-Code: T5

SEPTOR®

Flood light headlamp for close up tasks or arm's length

- Soft, wide beam illuminates your work area
- Multi-function switch remembers the last mode used
- 90° tilting head

| | HIGH | MEDIUM | LOW |
|-----------------|---------|--------|--------|
| LUMENS | 120 | 45 | 13 |
| CANDELA | 900 | 375 | 100 |
| DISTANCE | 60m | 35m | 20m |
| RUN TIME | 3.5 hrs | 10 hrs | 55 hrs |



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G,
Class III, T-Code: T5



| Description | Item # |
|---|--------|
| Septor - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow | 61052 |

| Size and Weight | Battery |
|------------------------------|----------------------------|
| 2.4" (6.9 cm); 5.5 oz (156g) | (3) AAA alkaline batteries |

ARGO®

Tilting headlamp for your work place

- Intense, long-distance beam
- Down range illumination with three levels of output
- 90° tilting head

| | HIGH | MEDIUM | LOW |
|-----------------|-------|---------|--------|
| LUMENS | 150 | 100 | 45 |
| CANDELA | 9,250 | 6,375 | 2,750 |
| DISTANCE | 190m | 160m | 103m |
| RUN TIME | 3 hrs | 4.5 hrs | 30 hrs |



Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G,
Class III, T-Code: T5

| Description | Item # |
|---|--------|
| Argo - Includes rubber and elastic headstraps and (3) alkaline AAA batteries - Yellow | 61301 |

| Size and Weight | Battery |
|------------------------------|----------------------------|
| 2.4" (6.9 cm); 5.4 oz (153g) | (3) AAA alkaline batteries |

BANDIT® PRO

IPX4

Lightweight, long lasting headlamp

- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks



| | HIGH | LOW |
|------------------------------|---------|--------|
| LUMENS | 180 | 35 |
| RUN TIME | 4.5 hrs | 21 hrs |
| Emergency flash - 180 lumens | | |

BANDIT®

IPX4

Ultra-lightweight, low-profile headlamp

- Large button for easy actuation
- USB rechargeable battery
- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- Delivers a wide even beam with minimum shadows, perfect for close-up work

Yellow & Black Models: White LED



| | HIGH | LOW |
|------------------------------|-------|---------|
| LUMENS | 180 | 35 |
| RUN TIME | 2 hrs | 9.5 hrs |
| Emergency flash - 180 lumens | | |

Coyote Models: White/Red LED
White/Green LED



| Description | Item # |
|--|--------|
| Bandit Pro - Includes USB cord - Clam - Yellow | 61710 |
| Bandit Pro - Includes USB cord - Clam - Black | 61714 |
| Bandit Pro - Includes elastic headstrap, rubber hard hat strap, 3M® Dual Lock® and USB cord - Box - Yellow | 61716 |

| Size and Weight | Battery |
|--------------------------------|------------------------------|
| 2.7" (6.85 cm); 1.6 oz (45.4g) | Rechargeable lithium polymer |



| | HIGH | LOW |
|----------|---------|----------|
| LUMENS | 135 | 25 |
| RUN TIME | 3 hrs | 13.5 hrs |
| | | |
| | HIGH | LOW |
| LUMENS | 45 | 10 |
| RUN TIME | 2.5 hrs | 10 hrs |

| Description | Item # |
|--|--------|
| Bandit - Includes USB cord - Clam - Yellow | 61700 |
| Bandit - Includes USB cord - Clam - Black | 61702 |
| Bandit - Includes USB cord - Clam - Coyote with Red LED | 61706 |
| Bandit - Includes USB cord - Clam - Coyote with Green LED | 61707 |
| Bandit - Includes elastic headstrap, rubber hard hat strap, 3M® Dual Lock® and USB cord - Box - Yellow | 61703 |

| Size and Weight | Battery |
|--------------------------------|------------------------------|
| 2.7" (6.85 cm); 1.3 oz (36.8g) | Rechargeable lithium polymer |

NEW**SLEDGE®****IPX4**

Low profile, multi-fuel flood headlamp

- Delivers up to 600 lumens of consistent output, with THRO® mode providing a short burst of 1,000 lumens
- Multi-function push-button switch easy to use with gloves
- 45° tilting head

| | THRO | HIGH | MEDIUM | LOW |
|-----------------|--------|----------|----------|--------|
| LUMENS | 1,000 | 600 | 300 | 100 |
| CANDELA | 3,000 | 1,800 | 850 | 310 |
| DISTANCE | 110m | 85m | 58m | 35m |
| RUN TIME | 60 sec | 4.25 hrs | 9.25 hrs | 13 hrs |



SLEDGE®

- RUGGED, MULTI-FUEL FLOOD HEADLAMP
- 1,000 LUMENS

DOUBLE CLUTCH® USB



Multi-fuel, dual-function, dual-output headlamp

- Facecap twists for easy functionality even with gloves
- 60° tilting head
- Flexibility to shift between beams and modes to fit your task

| Description | Item # |
|---|--------|
| Double Clutch USB - 120V AC - Yellow | 61602 |
| Double Clutch USB - 120V AC - Black | 61603 |
| Double Clutch USB - Includes USB-C cord - Yellow | 61600 |
| Double Clutch USB - Includes USB-C cord - Black | 61601 |
| Double Clutch USB - Alkaline Model - Includes (3) alkaline batteries - Yellow | 61607 |
| Double Clutch USB - Alkaline Model - Includes (3) alkaline batteries - Black | 61608 |

| Size and Weight | Battery |
|-------------------------------|-----------------|
| 2.5" (6.35 cm); 3.7 oz (105g) | Lithium Polymer |

| | HIGH | LOW |
|---------------------------------|---------|--------|
| LUMENS | 125 | 30 |
| SPOT CANDELA | 1,700 | 400 |
| SPOT DISTANCE | 82m | 40m |
| FLOOD CANDELA | 250 | 70 |
| FLOOD DISTANCE | 31m | 4m |
| RUN TIME Lithium Polymer | 3.5 hrs | 10 hrs |
| RUN TIME Alkaline | 6 hrs | 18 hrs |



HEADLAMP ACCESSORIES

| DESCRIPTION | ITEM # | SL-SIDESADDLE | PROTAC HL HEADLAMP | PROTAC HL USB HEADLAMP | SLEDGE | PROTAC 2.0 HEADLAMP | DOUBLE CLUTCH USB | ENDURO PRO | ENDURO PRO USB | ENDURO PRO HAZ-LO | USB HAZ-LO HEADLAMP | BANDIT SERIES |
|-----------------------------------|--------|---------------|--------------------|------------------------|--------|---------------------|-------------------|------------|----------------|-------------------|---------------------|---------------|
| CR123A Batteries - 2pk | 85175 | | ✓ | | | | | | | | | |
| CR123A Batteries - 6pk | 85180 | | ✓ | | | | | | | | | |
| CR123A Batteries - 12pk | 85177 | | ✓ | | | | | | | | | |
| CR123A Batteries - 400pk | 85179 | | ✓ | | | | | | | | | |
| Li-ion Battery Stick | 74175 | | | ✓ | | | | | | | | |
| SL-B26 Battery Pack - 1pk | 22101 | | | | ✓ | ✓ | | | | | | |
| SL-B26 Battery Pack - 2pk | 22102 | | | | ✓ | ✓ | | | | | | |
| SL-B26 Battery Pack - 8pk | 22105 | | | | ✓ | ✓ | | | | | | |
| SL-B50 Battery Pack - 1pk | 22111 | | | | | | ✓ | | | | | |
| SL-B50 Battery Pack - 2pk | 22112 | | | | | | ✓ | | | | | |
| Lithium Polymer Battery | 61604 | | | | | | | ✓ | | | | |
| Li-ion Battery Pack Kit - USB | 22010 | | | | ✓ | | | | | | | |
| Li-ion Battery Pack Kit - 120V AC | 22011 | | | | ✓ | | | | | | | |
| 120V AC USB Charge Cord | 22071 | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 120V AC Bank Charger | 61469 | | | | | | | | | | ✓ | |
| Charge Cradle | 61465 | | | | | | | | | | ✓ | |
| 40" USB Cord | 22070 | | | | ✓ | | | ✓ | ✓ | | | ✓ |
| 22" USB Cord | 22081 | | | | ✓ | | | ✓ | ✓ | | | ✓ |
| 22" USB-C Cord | 22084 | | | | | ✓ | ✓ | | | | | |
| Green Filter | 89012 | | | | | | ✓ | | | | | |
| Hard Hat Clips for 1" Strap | 61437 | | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ |
| Hard Hat Base | 61622 | ✓ | | | | | | | | | | |
| Universal Y-Strap | 61623 | ✓ | | | | | | | | | | |
| Slot Strap Kit | 61624 | ✓ | | | | | | | | | | |



STREAM™ SERIES



MEGASTREAM® USB



Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- The hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Powered by a SL-B34 rechargeable battery; recharges in 5 hours
- Sliding sleeve protects the USB port

| Description | Item # |
|---|--------|
| MegaStream USB - Includes USB-C cord, holster and SL-B34 battery pack - Black | 66210 |

| Size and Weight | Battery |
|-------------------------------|-------------------------|
| 5.3" (13.4 cm); 5.4 oz (152g) | (1) SL-B34 battery pack |

| | HIGH | MEDIUM | LOW |
|----------|--------|---------|--------|
| LUMENS | 1,800 | 500 | 150 |
| CANDELA | 26,000 | 7,200 | 2,100 |
| DISTANCE | 322m | 170m | 92m |
| RUN TIME | 2 hrs | 3.5 hrs | 13 hrs |



MEGASTREAM® HP USB



Powerhouse, high-candela, long range flashlight designed for convenience, it slips effortlessly into your bag

- Power up via the charge port in the body or swap out the removable battery to charge while using a fresh one
- Slide the head cover back for USB-C port
- Powered by a SL-B34 rechargeable battery; recharges in 5 hours



| | HIGH | MEDIUM | LOW |
|----------|---------|---------|--------|
| LUMENS | 1,350 | 470 | 145 |
| CANDELA | 310,000 | 108,000 | 32,000 |
| DISTANCE | 1,114m | 657m | 358m |
| RUN TIME | 2 hrs | 4 hrs | 15 hrs |



| Description | Item # |
|--|--------|
| MegaStream HP USB - Includes USB-C cord, holster and SL-B34 battery pack - Black | 66211 |

| Size and Weight | Battery |
|------------------------------|-------------------------|
| 6.61" (16.8 cm); 9 oz (254g) | (1) SL-B34 battery pack |

MICROSTREAM®



Ultra-compact personal light

- Clip it to your hat or pocket
- Alkaline battery powered

| | |
|----------|----------|
| LUMENS | 45 |
| CANDELA | 420 |
| DISTANCE | 41m |
| RUN TIME | 2.25 hrs |



| Description | Item # | NSN/MCN# |
|---|--------|------------------|
| MicroStream - Includes (1) AAA alkaline battery - Black | 66318 | 6230-01-583-9046 |

| Size and Weight | Battery |
|--------------------------------|--------------------------|
| 3.6" (9.15 cm); 1.1 oz (31.2g) | (1) AAA alkaline battery |

MACROSTREAM® USB



High-power, rechargeable flashlight

- Lithium-ion battery charges in 4 hours
- Durable aluminium construction
- Pocket clip attaches to visor

| | HIGH | LOW |
|----------|-------|-------|
| LUMENS | 500 | 50 |
| CANDELA | 2,000 | 220 |
| DISTANCE | 90m | 30m |
| RUN TIME | 2 hrs | 8 hrs |



MICROSTREAM® USB



Rechargeable pocket light

- Discreet light that fits in your pocket
- Clip it to your pocket or hat for hands-free use
- USB rechargeable – metal sleeve protects charge port; slide sleeve forward to reveal charge port

| Description | Item # |
|--|--------|
| MicroStream USB - Includes lanyard - Clam - Black | 66601 |
| MicroStream USB - Includes lanyard - Box - Black | 66604 |
| MicroStream USB - Includes lanyard - Clam - Coyote | 66608 |
| MicroStream USB - Includes lanyard - Box - Coyote | 66609 |

| Size and Weight | Battery |
|---------------------------------|-------------|
| 3.87" (9.83 cm); 1.2 oz (34.1g) | Lithium-ion |

| | HIGH | LOW |
|----------|---------|---------|
| LUMENS | 250 | 50 |
| CANDELA | 1,150 | 250 |
| DISTANCE | 68m | 31m |
| RUN TIME | 1.5 hrs | 3.5 hrs |



STYLUS® SERIES



STYLUS PRO®



Compact, durable penlight to carry on a daily basis

- Fits easily in your pocket
- Low battery indicator - strobos when batteries are needed

| Description | Item # |
|---|--------|
| Stylus Pro - Includes (2) AAA alkaline batteries - Black | 66118 |
| Stylus Pro - Includes (2) AAA alkaline batteries - Silver | 66121 |
| Stylus Pro - Includes (2) AAA alkaline batteries - Red | 66120 |
| Stylus Pro - Includes (2) AAA alkaline batteries - Blue | 66122 |
| Stylus Pro - Includes (2) AAA alkaline batteries - Lime Green | 66129 |
| Stylus Pro - Includes (2) AAA alkaline batteries - Orange | 66128 |

| Size and Weight | Battery |
|---------------------------------|----------------------------|
| 5.3" (13.4 cm); 1.64 oz (46.9g) | (2) AAA alkaline batteries |

| | |
|----------|-------|
| LUMENS | 100 |
| CANDELA | 950 |
| DISTANCE | 62m |
| RUN TIME | 8 hrs |



STYLUS PRO® USB // STYLUS PRO® USB UV



Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode
- UV Model features a purple sleeve for easy identification

| Description | Item # |
|--|--------|
| Stylus Pro USB - 120V AC with holster - Black | 66133 |
| Stylus Pro USB - Includes holster - Black | 66134 |
| Stylus Pro USB UV - 120V AC with holster - Black | 66148 |
| Stylus Pro USB UV - Includes holster - Black | 66149 |

| Size and Weight | Battery |
|-------------------------------|-------------|
| 5.95" (15.1 cm); 1.8 oz (51g) | Lithium-ion |

| WHITE LED | HIGH | LOW |
|-----------|---------|---------|
| LUMENS | 350 | 90 |
| CANDELA | 2,950 | 840 |
| DISTANCE | 109m | 58m |
| RUN TIME | 1.5 hrs | 3.5 hrs |



| | |
|--------------|---------|
| 400NM UV LED | |
| OUTPUT | 250mW |
| RUN TIME | 2.5 hrs |

STYLUS®



Ultra-slim penlight with a long battery life

- Multi-use penlight
- Removable pocket clip

| LED Color | WHITE | GREEN | BLUE | RED |
|-----------|--------|--------|--------|--------|
| LUMENS | 11 | 7 | 2 | 2 |
| CANDELA | 140 | 59 | 110 | 53 |
| DISTANCE | 24m | 15m | 21m | 15m |
| RUN TIME | 24 hrs | 24 hrs | 24 hrs | 24 hrs |

| Description | Item # |
|--|--------|
| Stylus - Black - Red LED | 65006 |
| Stylus - Silver - White LED | 65012 |
| Stylus - Black - White LED | 65018 |
| Stylus - Black - Green LED | 65020 |
| Stylus - Black - Blue LED | 65022 |
| Stylus - Gold - White LED | 65024 |
| Stylus - Red - White LED | 65035 |
| Stylus - Blue - White LED | 65050 |
| Stylus - UL Listed - Black - White LED | 65058 |

| Size and Weight | Battery |
|--------------------------------|-----------------------------|
| 6.21" (15.17 cm); 1.1 oz (31g) | (3) AAAA alkaline batteries |

CLASSIFIED
cUL
CLASSIFIED
UL

Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Grps. A, B, C, D, T3C
"Classified"



SAFETY RATED MODEL OFFERED

STYLUS® ACCESSORIES

| DESCRIPTION | ITEM # | STYLUS | STYLUS PRO | STYLUS PRO USB |
|--------------------------------|--------|--------|------------|----------------|
| Nylon Holster | 66028 | | ✓ | |
| Nylon Holster | 66029 | ✓ | | ✓ |
| USB Power Adapter | 22058 | | | ✓ |
| 40" USB Cord | 22070 | | | ✓ |
| Stylus Pro USB Battery | 66143 | | | ✓ |
| AAAA Battery Pack - 6 pk | 65030 | ✓ | | |
| Glare Guard™ | 65031 | ✓ | | |
| Rubber Sleeve - 6 pk | 66155 | | | ✓ |
| Lanyard with Push-Button Slide | 72024 | ✓ | | |



STYLUS® REACH



Penlight featuring a flexible cable with a high-intensity white LED

- 7 inch (17.78 cm) extension cable allows for 14 inches (35.6 cm) of reach
- Ideal for seeing into tight spots

| | |
|----------|--------|
| LUMENS | 11 |
| CANDELA | 140 |
| DISTANCE | 24m |
| RUN TIME | 24 hrs |



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Grps. A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Grps. A, B, C, D, T3C
"Exia"

| Description | Item # |
|---|--------|
| Stylus Reach - Black - Clam - White LED | 65618 |
| Stylus Reach - UL Listed Black - Clam - White LED | 65658 |
| Stylus Reach - Silver - Clam - White LED | 65612 |

| Size and Weight | Battery |
|--------------------------------|-------------------|
| 14" (35.6 cm); 1.7 oz (48.19g) | (3) AAAA alkaline |

STYLUS REACH® 18



Penlight featuring a flexible cable with a high-intensity white LED

- Provides 25" (63.5 cm) of reach
- Ideal for seeing into even tighter spots

| | |
|----------|--------|
| LUMENS | 11 |
| CANDELA | 140 |
| DISTANCE | 24m |
| RUN TIME | 24 hrs |



| Description | Item # |
|-----------------|--------|
| Stylus Reach 18 | 65418 |

| Size and Weight | Battery |
|--------------------------------|-------------------|
| 25.5" (64.77 cm); 2.5 oz (70g) | (3) AAAA alkaline |

CLIPMATE® USB



Multi-function clip light for hands-free use

- Features a white LED and a 620-630nm red LED
- Built-in USB charge tab
- Recharges by plugging into USB port or optional AC wall adapter

| Description | Item # |
|------------------------|--------|
| ClipMate USB | 61125 |
| ClipMate USB - 120V AC | 61126 |
| 120V AC Wall Adapter | 22058 |

| Size and Weight | Battery |
|---------------------------------|----------------------|
| 3.2" (8.13 cm); 1.9 oz (53.86g) | Lithium polymer cell |

| | WHITE LED | | RED LED | |
|----------|-----------|--------|---------|--------|
| | HIGH | LOW | HIGH | LOW |
| LUMENS | 70 | 10 | 0.5 | 0.2 |
| CANDELA | 500 | 50 | 9 | 3 |
| DISTANCE | 44m | 14m | 6m | 3m |
| RUN TIME | 3.5 hrs | 24 hrs | 16 hrs | 65 hrs |





JR SERIES

STREAMLIGHT JR F-STOP®



Handheld flood to spot work light

- It provides a smooth flood beam to illuminate your work area without tiring your eyes
- Slide the lens forward for a smooth transition to a spot beam for distance lighting

| | FLOOD | SPOT |
|-------------------|--------|--------|
| LUMENS | 250 | 220 |
| CANDELA | 360 | 5,600 |
| DISTANCE | 38m | 150m |
| RUN TIME Alkaline | 6 hrs | 6 hrs |
| RUN TIME Lithium | 10 hrs | 10 hrs |



STREAMLIGHT JR® LED



Handheld AA battery-sized flashlight

- Doesn't take up a lot of space in the toolbox
- Push-button switch for momentary or constant on

| | |
|-------------------|--------|
| LUMENS | 225 |
| CANDELA | 2,700 |
| DISTANCE | 104m |
| RUN TIME Alkaline | 6 hrs |
| RUN TIME Lithium | 10 hrs |



| Description | Item # |
|--|--------|
| Streamlight Jr. F-Stop - Includes (2) batteries - Box - Black | 71700 |
| Streamlight Jr. F-Stop - Includes (2) batteries - Clam - Black | 71701 |
| Nylon Holster | 71503 |
| Rubber Helmet Strap | 99075 |

| Size and Weight | Battery |
|--------------------------------|----------------------------|
| 6.5" (16.51 cm); 4.4 oz (125g) | (2) AA alkaline or lithium |

| Description | Item # |
|--|--------|
| Streamlight Jr. LED - Includes (2) AA alkaline batteries and nylon holster - Black | 71500 |
| Magnetic Clip Holder | 71510 |
| Nylon Holster | 71503 |
| Rubber Helmet Strap | 99075 |

| Size and Weight | Battery |
|--------------------------------|----------------------------|
| 6.5" (16.51 cm); 4.1 oz (117g) | (2) AA alkaline or lithium |



KEY CHAIN SERIES

NANO LIGHT® II



Ultra-compact key chain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

| | |
|----------|------|
| LUMENS | 20 |
| CANDELA | 120 |
| DISTANCE | 22m |
| RUN TIME | 1 hr |

| Description | Item # |
|--|--------|
| Nano Light II - Includes (1) AAAA alkaline battery - Black | 73020 |

| Size and Weight | Battery |
|-----------------------------|-------------------|
| 2.2" (5.7 cm); 0.6 oz (18g) | (1) AAAA alkaline |



POCKET MATE®



Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

| Description | Item # |
|--|--------|
| Pocket Mate - Includes Micro-USB cord - Silver | 73300 |
| Pocket Mate - Includes Micro-USB cord - Red | 73301 |
| Pocket Mate - Includes Micro-USB cord - Blue | 73302 |
| Pocket Mate - Includes Micro-USB cord - Pink | 73303 |

| Size and Weight | Battery |
|-----------------------------|-----------------|
| 2" (5.1 cm); 0.5 oz (14.2g) | Lithium polymer |

| | HIGH | LOW |
|----------|--------|------|
| LUMENS | 325 | 45 |
| CANDELA | 1,450 | 200 |
| DISTANCE | 76m | 28m |
| RUN TIME | 20 min | 1 hr |




LIGHTS FOR A CAUSE



The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to advance the world's most promising research to eradicate breast cancer in our lifetime. For more information, visit www.bcrfcure.org.



| Description | Item # |
|----------------------|--------|
| Nano Light II - Pink | 73022 |
| Wedge XT - Pink | 88824 |

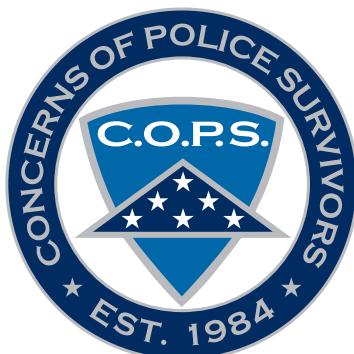

By purchasing this product, you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. (Concerns of Police Survivors) provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.



| Description | Item # |
|----------------------|--------|
| Nano Light II - Blue | 73021 |
| Wedge XT - Blue | 88825 |

For every blue Wedge XT sold, Streamlight will donate \$3 to Concerns of Police Survivors, Inc. (C.O.P.S.)

For every pink Wedge XT sold, Streamlight will donate \$3 to the Breast Cancer Research Foundation® (BCRF)

For every blue Nano Light II sold, we donate \$1 to Concerns of Police Survivors, Inc. (C.O.P.S.)
For every pink Nano Light II sold, Streamlight will donate \$1 to the Breast Cancer Research Foundation® (BCRF)



STREAMLIGHT
BRILLIANT THINKING®

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A. 19403-3996

streamlight.com // streamlightgear.com
[800] 523-7488 Toll-Free
[800] 220-7007 Fax
[610] 631-0600
[610] 631-0712 Fax



©2026 Streamlight, Inc. ISO 9001:2015 certified 1/26 asi/89871
All rights reserved. Trademarks of companies mentioned herein appear
for identification purposes only and are the property of their respective
companies.



The shape, style and appearance of
the generally triangular feature on
the head of the Stinger® Series is a
trademark of Streamlight, Inc.



The silver band that encircles the
head of the TLR® Series is a trade-
mark of Streamlight, Inc.

