

# INDUSTRIAL DIVISION



**STREAMLIGHT®**

**PROFESSIONAL  
ILLUMINATION TOOLS**

# TABLE OF CONTENTS

## BY PRODUCT LINE



When this icon is seen throughout the catalog, there are vending options for that part number

### // SAFETY-RATED HANDHELD SERIES



Dualie® Rechargeable  
pg. 6



Dualie® 3AA Color-Rite®  
pg. 7



Dualie® 2AA  
pg. 7



Dualie® 3AA  
pg. 7



Dualie® 3AA Laser  
pg. 8



Stylus Pro® HAZ-LO®  
pg. 8

### // HAZ-LO® HEADLAMP SERIES



4AA ProPolymer® Series  
pg. 9



2AA ProPolymer® HAZ-LO®  
pg. 10



USB HAZ-LO® Headlamp  
pg. 12



3AA HAZ-LO®  
pg. 13



Enduro® Pro HAZ-LO®  
pg. 13



### // HELMET LIGHTING AND HEADLAMP SERIES



SL-SideSaddle®  
pg. 14



Enduro® Pro  
pg. 16



ProTac 2.0® Headlamp  
pg. 16



Bandit® Pro  
pg. 17



Vantage® II  
pg. 17

### // WORK LIGHT SERIES



Stinger Switchblade®  
pg. 19



Strion Switchblade®  
pg. 19



Syclone®  
pg. 21



BearTrap® 360  
pg. 20

### // STINGER® AND STRION® SERIES



PolyStinger® LED  
pg. 22



PolyStinger® LED  
HAZ-LO® pg. 22



Stinger® 2020  
pg. 23



Strion® 2020  
pg. 23

### // SURVIVOR® SERIES



Survivor® X  
pg. 26



Survivor Pivot®  
pg. 27

## // PORTABLE SCENE LIGHT AND LANTERN SERIES



Vulcan Clutch®  
pg. 28



Vulcan® 180 Series  
pg. 29



Portable Scene Light II  
pg. 30



Portable Scene Light  
pg. 31



E-Spot® LiteBox®  
pg. 30

## // SIEGE® AND WAYPOINT® SERIES



The Siege®  
pg. 32



Waypoint® 400  
pg. 32



Wedge® XT  
pg. 34



Wedge®  
pg. 35



Streamlight Jr  
F-Stop® pg. 39

## // WEDGE® SERIES

## // STREAMLIGHT JR F-STOP

## // STREAM™ SERIES

## // SL-B26® BATTERY PACK

**NEW**



MegaStream® HP USB  
pg. 36



MegaStream® USB  
pg. 36



MicroStream®  
pg. 37



MicroStream®  
USB pg. 37



MacroStream®  
USB pg. 37



SL-B26® Battery Pack and  
Bank Charger pg. 46

## // STYLUS® SERIES

## // KEYCHAIN SERIES

## // POLYTAC® SERIES



Stylus Pro®  
pg. 38



Stylus Pro® USB / UV  
pg. 38



Pocket Mate®  
pg. 39



Nano Light® II  
pg. 39



PolyTac® X  
pg. 44



PolyTac 90® X  
pg. 44

## // PROTAC® SERIES

**NEW**

**NEW**



ProTac® 2.0  
pg. 40



ProTac® 2.0 HP  
pg. 40



ProTac® 2AA-X  
pg. 41



ProTac® 2L-X  
pg. 41



ProTac HL® USB  
pg. 42



ProTac® HL-X  
pg. 42



ProTac® HP-X  
pg. 42



ProTac HL® 6  
pg. 43

# YOUR SAFETY IS VERY IMPORTANT TO US



## STREAMLIGHT® GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and certified by the world's leading independent laboratories — including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.



2AA PROPOLYMER®  
HAZ-LO®



4AA PROPOLYMER®  
LUX



4AA PROPOLYMER®  
LED

NFPA®



## DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS.

The National Electric Code (NEC) defines hazardous locations by “class” and “division.” There are three classes:



**CLASS I** locations are made hazardous by the presence of flammable gases, liquids or vapors.



**CLASS II** locations are hazardous because combustible dusts are present.



**CLASS III** locations contain easily ignitable fibers or flyings.

The “Division” designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:



**DIVISION 1** designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



**DIVISION 2** locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by “groups” based on the physical properties of their combustible materials. These groups include (but are not limited to):



**GROUP A** Acetylene

**GROUP B** Hydrogen

**GROUP C** Ethylene, carbon monoxide

**GROUP D** Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



**GROUP E** Metals including aluminum, magnesium (Div. 1 only)

**GROUP F** Carbonaceous dusts including coal, carbon black, coke

**GROUP G** Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



DUALIE® 2AA



DUALIE® 3AA  
COLOR-RITE®



DUALIE® 3AA



STYLUS PRO® HAZ-LO®



DUALIE®  
RECHARGEABLE



DUALIE® 3AA LASER



POLYSTINGER® LED  
HAZ-LO®



SURVIVOR PIVOT®



SURVIVOR® X



ENDURO® PRO HAZ-LO®



USB HAZ-LO® HEADLAMP



3AA HAZ-LO®

## YOUR SAFETY IS OUR TOP PRIORITY

Since the most extreme hazardous conditions are often in dark places, Streamlight has developed a complete line of Class I, Division 1 safety-rated lighting tools approved for use in hazardous environments.

### STREAMLIGHT'S HAZ-LO SERIES OF LIGHTING TOOLS PROVIDE PEACE OF MIND WITH A DIVISION 1 RATING.

When working in a Division 1 area, we expect combustible materials to be present. Streamlight's HAZ-LO product line is suitable for use in these locations. While outfitting your crew with Division 1 level tools, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.

### WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use flashlights that have not been specifically designed and approved for that environment. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you plan to use a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific environment.



Scan or click to watch our video:  
"You Bet Your Light On It:  
Safety Ratings Explained"



# SAFETY-RATED HANDHELD SERIES

## DUALIE® RECHARGEABLE



Rechargeable, multi-function, dual beam flashlight

- Mount virtually anywhere with charge holder
- Features two beams that intersect to prevent blind spots
- Lithium-ion battery recharges in 8 hours
- Use with #68089 Poly Mount Kit for hands-free lighting

	SPOT	FLOOD	COMBO
LUMENS	180	105	275
CANDELA	11,500	60	--
DISTANCE	171m	18m	--
RUN TIME	7.25 hrs	13.5 hrs	5.5 hrs

Description	Item #
Dualie Rechargeable - 120V/100V AC - Yellow	68732
Dualie Rechargeable - 12V DC - Yellow	68734
Dualie Rechargeable - Light Only - Yellow	68730
Dualie Rechargeable - Magnet - 120V/100V AC - Yellow	68793
Dualie Rechargeable - Magnet - 12V DC - Yellow	68795
Dualie Rechargeable - Magnet - Light Only - Yellow	68785

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g) //	Lithium-ion
Magnet: 7.5" (19.05 cm); 7.09 oz (201g)	



## DUALIE® 3AA COLOR-RITE®

Multi-function AA flashlight with Color-Right Technology®

- Features cool white LED and a high CRI LED for true color recognition
- Produces a soft, wide beam to illuminate your work area
- Dual switches for easy one-handed operation

Description	Item #
Dualie 3AA Color-Rite - Includes (3) AA alkaline batteries - Yellow	68910

Size and Weight	Battery
7" (17.78 cm); 6.6 oz (187g)	(3) AA alkaline



	SPOT (COOL WHITE)	FLOOD (WARM WHITE)	COMBO
LUMENS	225	175	320
CANDELA	8,000	380	7,000
DISTANCE	179m	39m	167m
RUN TIME	8 hrs	8.5 hrs	5 hrs

Color Temperature: 4,000k



Class I, II, Div. I  
Grps. A, B, C, D, E, F, G  
Class III, T-Code: T4

**Color-  
Rite®**



## DUALIE® 2AA



Dual beam, compact, C1D1, multi-function flashlight

- Spot and flood LED options
- Integrated magnet for hands-free use

	SPOT	FLOOD	COMBO
LUMENS	115	115	175
CANDELA	3,100	75	---
DISTANCE	111m	17m	---
RUN TIME	24 hrs	24 hrs	15 hrs



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T4



Description	Item #
Dualie 2AA - Includes (2) AA alkaline batteries - Yellow	67750

Size and Weight	Battery
6.1" (15.5 cm); 3.9 oz (111g)	(2) AA alkaline

## DUALIE® 3AA



Features two LEDs and three lighting modes: spot, flood, spot/flood combo

- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation

	SPOT	FLOOD	COMBO
LUMENS	140	140	245
CANDELA	7,300	80	---
DISTANCE	171m	8m	---
RUN TIME	18 hrs	18 hrs	9 hrs



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T4



Permissible Flashlight  
App. No. 20-A160001-0  
Tested for Intrinsic Safety in Methane-Air mixtures only



Description	Item #
Dualie 3AA - batteries not included - Yellow	68751
Dualie 3AA Magnet - batteries not included - Yellow	68780
Dualie 3AA Magnet - Includes (3) AA alkaline batteries and lanyard - Yellow	68782

Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g)	(3) AA alkaline

## DUALIE® 3AA LASER

Intrinsically safe flashlight with red laser pointer

- Spot, laser and combo modes
- Focused spot beam to pinpoint objects at a distance
- Use with #68089 Poly Mount Kit for hands-free lighting

	SPOT	LASER
LUMENS	150	<5mW output
CANDELA	7,700	---
DISTANCE	175m	---
RUN TIME	17 hrs	70 hrs
LED/Laser combo runs 12 hours		



Permissible Flashlight  
App. No. 20-A160001-0  
Tested for Intrinsic Safety in Methane-Air mixtures only



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T4

Description	Item #
Dualie 3AA Laser - Includes (3) AA alkaline batteries - Yellow	68760
Size and Weight	Battery
7" (17.78 cm); 6.8 oz (193g)	(3) AA alkaline



Simultaneous spot beam  
and laser pointer illuminate  
your work area and pinpoint  
out-of-reach objects

## STYLUS PRO® HAZ-LO®



Intrinsically safe, alkaline penlight

- Features a tail switch with momentary and constant on operation
- Non-conductive, chemical-resistant polymer construction

LUMENS	105
CANDELA	380
DISTANCE	39m
RUN TIME	2.25 hrs



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Class: T3/T4

Description	Item #
Stylus Pro HAZ-LO - Includes (2) AAA alkaline batteries - Yellow	66300
Size and Weight	Battery
5.92" (15 cm); 1.9 oz (53.9g)	(2) AAA alkaline





## 4AA PROPOLYMER® LUX







Intrinsically safe, with long-reaching beam flashlight

- Ergonomic design for comfortable handling
- Unbreakable, scratch resistant lens
- Works with #68089 Poly Mount Kit

LUMENS	200
CANDELA	12,000
DISTANCE	219m
RUN TIME	6 hrs



**4AA Lux Div. 1**    
 Class I, II, Div. 1, Grps. C, D, F, G;  
 Class I, Div. 2, Grps. A, B, C, D;  
 Class III, T-Code: T4

**4AA Lux Div. 2**    
 Class I, Div. 2, Grps. A, B, C, D;  
 Class II, Div. 2, Grps. F, G;  
 Class III, T-Code: T3C

Description	Item #
4AA ProPolymer Lux Div. 2 - Includes (4) AA alkaline batteries - Yellow	68244
4AA ProPolymer Lux Div. 1 - Includes (4) AA alkaline batteries - Yellow	68602

Size and Weight	Battery
7" (17.8 cm); 7.2 oz (204g)	(4) AA alkaline

## 4AA PROPOLYMER® LED




Perfect flashlight for up close work

- Seven LEDs produce soft, diffused light
- Unbreakable, scratch resistant lens
- Chemical-resistant body

LUMENS	67
RUN TIME	155 hrs



  
 Class I, Div. 1, Grps. C, D;  
 Class I, Div. 2, Grps. A, B, C, D;  
 Class II, Div. 2, Grps. F, G;  
 Class III, T-Code: T3C

  
 Class I, Div. 2, Grps. A, B, C, D;  
 Class II, Div. 2, Grps. F, G;  
 Class III, T-Code: T3C

  
 Permissible Flashlight  
 App. No. 10C-658-0  
 Tested for use in methane-air  
 mixtures only

Description	Item #
4AA ProPolymer LED - Includes (4) AA alkaline batteries - Box - Yellow	68201
4AA ProPolymer LED - Includes (4) AA alkaline batteries - Clam - Yellow	68202

Size and Weight	Battery
6.5" (16.51 cm); 6.3 oz (178.6g)	(4) AA alkaline



## 2AA PROPOLYMER® HAZ-LO®



General purpose, intrinsically-safe handheld flashlight

- Impact resistant polymer construction
- Use with #68089 Poly Mount Kit for hands-free lighting

LUMENS	65
CANDELA	2,300
DISTANCE	96m
RUN TIME	24 hrs



Permissible Flashlight.  
Approval No. 20-A140002-0.  
Tested for Intrinsic Safety in  
Methane-Air mixtures only.



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III; T-Class: T4

### Description

2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Yellow

### Item #

67101

### Size and Weight

6.4" (16.26 cm); 3.6 oz (100g)

### Battery

(2) AA alkaline

## POLY MOUNT KIT

"No tools required" kit to easily attach your flashlight to your hard hat

- Attaches to a variety of helmets and Streamlight lights (listed below) for hands-free use
- Adjustable so you can aim the light where you need it

### Poly Mount Kit includes:

Adhesive base to attach to side of hard hat

Mounting base that slides into the slot of hard hat

### Bands for:

Dualie® 2AA

2AA ProPolymer® HAZ-LO®

Dualie® 3AA

4AA ProPolymer® Lux

Dualie® Rechargeable

PolyTac® X



### Description

Poly Mount Kit

### Item #

68089




Shown with Dualie 2AA (not included)  
using adhesive base



Shown with Dualie 2AA (not included)  
using slot attachment

## DUALIE AND PROPOLYMER ACCESSORIES

DESCRIPTION	ITEM #	DUALIE 2AA	DUALIE 3AA/ 3AA LASER	DUALIE RECHARGEABLE	2AA PROPOLYMER HAZ-LO	4AA PROPOLYMER LUX	STYLUS PRO HAZ-LO
6 Unit Bank Charger	68789			✓			
Lithium-ion Battery	68792			✓			
120V AC USB Cord	22071			✓			
12V USB Cord	22080			✓			
Nylon Holster	66029						✓
Helmet Mount	68085		✓	✓			
Metal Clip	66301						✓
Charge Holder	68790			✓			
Poly Mount Kit	68089	✓	✓	✓	✓	✓	
Tailcap Assembly	66302						✓
Rubber Helmet Band	99075				✓	✓	
Red Safety Wand	74903				✓		
Yellow Safety Wand	74904				✓		
Glow in the Dark Safety Wand	74913				✓		

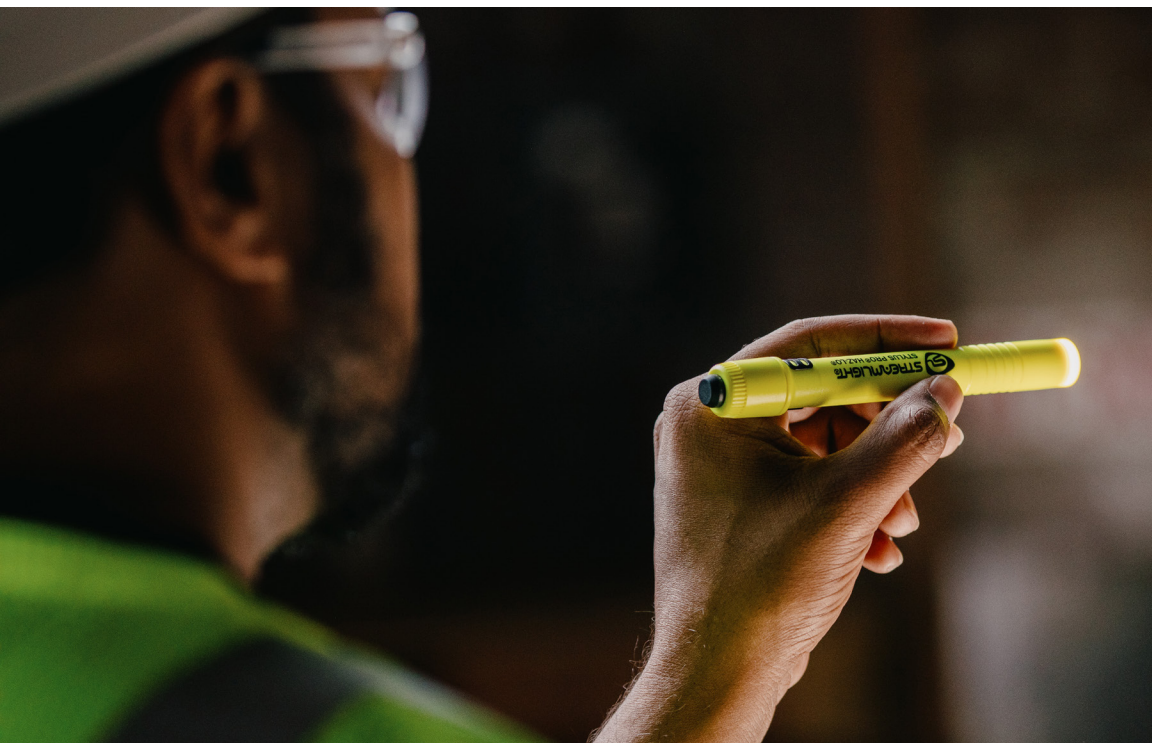



# HEADLAMP SERIES

## USB HAZ-LO® HEADLAMP

Rechargeable, Class 1, Div 1 headlamp

- Multiple modes cover a variety of tasks with just one light; spot, flood and combo
- Charge indicator LEDs: Red=charging; Green=charged; charges in 4.5 hours
- Multi-function switch is easy to use

	SPOT	FLOOD	COMBO
LUMENS	190	120	250
CANDELA	2,000	90	--
DISTANCE	89m	19m	--
RUN TIME	7.5 hrs	13 hrs	7 hrs

Description	Item #
USB HAZ-LO Headlamp - Includes 120V AC cord, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Box - Yellow	61460
USB HAZ-LO Headlamp - 120V AC charge cradle, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Box - Yellow	61463
(3) Hard Hat Clips for 1" Straps	61437
Size and Weight	Battery
1.72" (4.36 cm); 4.1 oz (116.2g)	Lithium-ion



Two hard hat mounting options:  
Rubber strap



3M® Dual Lock® for strapless mounting



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G  
Class III, CL 1, Zn 0, IIC  
T-Code: T4

## 3AA HAZ-LO® HEADLAMP



Class 1, Div 1 headlamp

- Push-button on/off switch easy to use even when wearing heavy gloves
- 90° tilting head
- Includes both rubber hard hat and elastic straps

LUMENS	270
CANDELA	5,600
DISTANCE	150m
RUN TIME	8 hrs

Description	Item #
3AA HAZ-LO Headlamp - Includes (3) AA alkaline batteries, elastic headstrap and rubber hard hat - Yellow	61200
Hard Hat Clips for 1" Straps	61437

Size and Weight	Battery
3.08" (7.32 cm); 7.82 oz (202g)	(3) AA alkaline



Class I, Div. 1, Grps A, B, C, D  
Class II, Div. 1, Grps E, F, G,  
Class III, T-Code: T4



IP67



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G;  
Class III, Class 1, Zn 0, Grps. IIC, Exia  
T-Code: T4



Permissible Portable Headlamp Assembly  
App. No. 20-A070001-0  
Tested for use in methane-air mixtures only

Intrinsically-safe headlamp with spot, flood and combo modes

- Multi-function switch remembers the last mode used
- 45° tilting head
- Tough, thermoplastic construction

	SPOT	FLOOD	COMBO
LUMENS	160	160	235
CANDELA	1,320	100	--
DISTANCE	73m	20m	--
RUN TIME	5 hrs	5 hrs	4.75 hrs

Description	Item #
Enduro Pro HAZ-LO - Includes (3) AAA alkaline batteries, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61424
(3) Hard Hat Clips for 1" Straps	61437

Size and Weight	Battery
2.19" (5.56 cm); 3.5 oz (99.2g)	(3) AAA alkaline



Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



**NEW**

## SL-SIDESADDLE® // SL-SIDESADDLE® USB



**IPX7**

Universal helmet light designed to mount directly to a wide variety of head gear including hard hats, helmets and baseball hats

- Charge and/or replace the batteries without removing from the mount
- Use the “quick release” tab to detach the light for hand-held use while the strap system remains securely in place
- Universal strap leaves slots open/available to integrate with other accessories
- Integrated tail switch with blue LED for easy control and visibility from behind
- Push-button switch with mode memory recalls your last setting



## A UNIVERSAL FIT SL-SIDESADDLE®, ADAPTABLE. RELIABLE. HAT & HELMET COMPATIBLE.

### Safety Helmets



#### Accessories included:



1. Feed the “Y” strap (A) through the bottom of the helmet, ensuring the logo is facing out
2. Loop the base plate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (fits around the earmuff) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

### Hats and Bump Caps



#### Accessories included:




1. Unscrew the threaded pins on the rear mounting bracket (C)
2. Place in desired location on the inside of the hat
3. Place the top mounting bracket (D) on top of the pins and lock the thumb screws in place
4. Swivel and adjust the light to where you want it

### Full Brim Hard Hats



#### Accessories included:

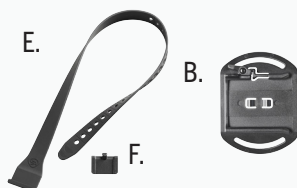

1. Feed the strap (E) through the bottom of the hard hat, ensuring the logo is facing out
2. Loop the base plate (B) onto the slotted strap
3. Pull the strap back through the accessory slot
4. Attach the strap clip (F) by feeding it back through the accessory slot
5. Pull rubber band tight
6. Simply slide the SL-SideSaddle into the mount

### Traditional Hard Hats



ALKALINE MODEL



USB MODEL



	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	250	60	235	60	300	110
CANDELA	2,500	715	215	55	1,900	660
DISTANCE	100m	53m	29m	15m	87m	51m
RUN TIME	6.75 hrs	12 hrs	6.5 hrs	16 hrs	5 hrs	6.75 hrs

Description	Yellow	Black
SL-SideSaddle - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap) and (3) AAA alkaline batteries	61630	61620
SL-SideSaddle Hat Light - Includes (3) AAA alkaline batteries and hat mount	61636	61626

Size and Weight	Battery
3" (7.6 cm); 3.4 oz (95g)	(3) AAA alkaline batteries

	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	350	100	325	85	400	160
CANDELA	4,250	1,200	300	75	2,400	960
DISTANCE	130m	69m	35m	17m	98m	62m
RUN TIME	6.25 hrs	12 hrs	7 hrs	12 hrs	5 hrs	7 hrs

Description	Yellow	Black
SL-SideSaddle USB - Includes hard hat mount kit (baseplate, slot strap and universal Y-strap), USB-C cord and (1) lithium polymer battery	61631	61621
SL-SideSaddle USB Hat Light - Includes (1) lithium polymer battery, USB-C cord and hat mount	61637	61627

Size and Weight	Battery
3" (7.6 cm); 3.1 oz (88g)	(1) Lithium polymer battery





## ENDURO® PRO



IPX4

Compact, multi-purpose headlamp

- Spot and flood modes- each with high, medium and low
- Multi-function switch remembers the last mode used
- Easy to use with gloved hands
- 45° tilting head

Spot	HIGH	MEDIUM	LOW
LUMENS	200	75	25
CANDELA	2,250	825	300
DISTANCE	95m	57m	35m
RUN TIME	6 hrs	14 hrs	38 hrs



Flood	HIGH	MEDIUM	LOW
LUMENS	135	45	15
CANDELA	210	80	20
DISTANCE	29m	18m	9m
RUN TIME	6 hrs	14 hrs	38 hrs

### Description

### Item #

Enduro Pro - Includes (3) AAA alkaline batteries and elastic head strap - Box - Yellow

61421

Enduro Pro - Includes (3) AAA alkaline batteries, elastic head strap, rubber hard hat strap and 3M® and Dual Lock® - Box - Yellow

61422

(3) Hard Hat Clips for 1" Straps

61437

3M® and Dual Lock® are registered Trademarks of the 3M Company

### Size and Weight

### Battery

2.19" (5.56 cm); Alkaline: 3.4 oz (96.38g) // Lithium: 3 oz (85.04g)

(3) AAA alkaline or lithium batteries

Two hard hat mounting options:

Rubber strap

3M® Dual Lock® for strapless mounting



## PROTAC® 2.0 HEADLAMP



IP64

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable battery charges inside of the light; recharges in 6 hours
- TEN-TAP® Programmable

	HIGH	MEDIUM	LOW
LUMENS	2,000	650	110
CANDELA	14,500	4,200	750
DISTANCE	241m	130m	55m
RUN TIME	2.25 hrs	4.5 hrs	25 hrs

### Description

### Item #

ProTac 2.0 Headlamp - Includes SL-B50 battery, USB-C cord, elastic and rubber straps - Black

89001

### Size and Weight

### Battery

4.92" (12.5 cm); 10.48 oz (297.1g)

(1) SL-B50 battery pack



## BANDIT® PRO



IPX4

Lightweight, long lasting headlamp

- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks
- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability

	HIGH	LOW
LUMENS	180	35
RUN TIME	4.5 hrs	21 hrs
Emergency flash - 180 lumens		



Description	Item #
Bandit Pro - Includes USB cord - Clam - Black	61714
Bandit Pro - Includes elastic headstrap, rubber hard hat strap, 3M® Dual Lock® and USB cord - Box - Yellow	61716
Hard Hat Clips for 1" Strap	61437

Size and Weight	Battery
2.7" (6.85 cm); 1.6 oz (45.4g)	Rechargeable lithium polymer

Two hard hat mounting options:  
Rubber strap



3M® Dual Lock®  
for strapless mounting



## VANTAGE® II



IPX7

Compact, low-profile helmet light designed to easily attach to slotted industrial hard hat mounts

- Safety feature includes a blue taillight LED so you can be seen from behind; can be configured to flash or be turned off
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location



Attaches securely to your hard hat in seconds! Just clip it into the slot

	HIGH	LOW
LUMENS	350	135
CANDELA	3,500	1,700
DISTANCE	118m	80m
RUN TIME	2.25 hrs	5 hrs

NFPA

Flashlight meets 500°F requirements of NFPA 1970–14.2 (2025)

Description	Item #
Vantage II - Industrial - Includes (1) CR123A lithium battery - Black	69333
Bracket Kit	69336

Size and Weight	Battery
2.37" (6.02 cm); 2.97 oz (84.2g)	(1) CR123A lithium



# TEN-TAP<sup>®</sup> PROGRAMMABLE FOR FLEXIBLE LIGHTING OPTIONS

## // What is it?

Do you like most of the features of a flashlight, but not the pre-set programs? Streamlight makes flashlights for a wide variety of applications, and we understand that not everyone wants the same amount of light. With TEN-TAP Programming, you can reprogram the light from its default output settings to better fit your needs.

Lights are shipped from the factory with their default output settings. For example, below are the default settings for the ProTac HL<sup>®</sup> and how to access them:

- **High:** Tap and hold; click to lock on; click again for off
- **Strobe:** Fast double-tap (within 0.4 seconds) and hold; click to lock on; click again for off
- **Low:** Fast triple-tap (within 0.4 seconds per tap) and hold; click to lock on; click again for off

Reprogramming is easy – with just a few quick taps of the switch, you can change the settings.

## // How does it work?

With lights that feature TEN-TAP Programming, you can choose from three user-selectable programs (for example: High/Strobe/Low [default]; High Only; and Low/High)

From the default mode, the next available program on the ProTac HL<sup>®</sup> would be "High Only," meaning that your flashlight would only come on in "High," no matter how many times you tap the switch.

To change to the next program, starting from the "Off" position, tap the switch rapidly 9 times (within 0.4 seconds per tap) and hold it down the 10th time. Continue holding the switch until the light turns off (approximately 1 second), then release the switch.

Repeat this process to access the next program (Low/High).

Programmable options differ depending on your flashlight model. Be sure to refer to the product fact sheet and instructions for more information.

## // COLOR-RITE<sup>®</sup> APPLICATIONS FOR INDUSTRIAL



Streamlight offers a family of Color-Rite lights for situations that require detailed inspections or color differentiation. For markets as diverse as industrial, we have developed high CRI lights with Color-Rite Technology<sup>®</sup> for a wide variety of tasks that require exacting attention to detail.

**Differentiate wire colors in electrical panels.** In plants and other facilities, high CRI lights like the Dualie<sup>®</sup> 3AA Color-Rite<sup>®</sup> and Syclone<sup>®</sup> provide better color contrast of intricate wires in electrical cabinets, helping technicians to work more efficiently.

**Spot imperfections.** High CRI lights allow for contrast of color to identify imperfections in finish inspections of products, including parts.

**And reduce eye fatigue.** The soft lighting of high CRI LEDs reduces eye strain and fatigue for many users.

## STINGER SWITCHBLADE®



IPX4

Rechargeable, 180° articulating, multi-function light bar


- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- Recharges in 6.25 hours
- Ultra thin design fits in tight spaces and folds in half for storage

	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	800	600	500 mW
RUN TIME	3.75 hrs	3.75 hrs	15 hrs

**Color-  
Rite®**



Description	Item #
Stinger Switchblade - 120V/100V AC - 1 holder - Red	76801
Stinger Switchblade - with USB cord - Red	76800
Size and Weight	Battery
Folded - 9.8" (24.89 cm); Extended - 17" (43.18 cm); 17.1 oz (485g)	Lithium-ion

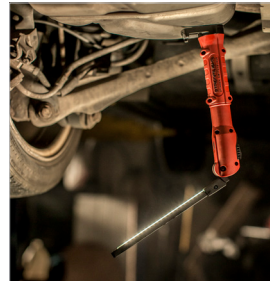

## STRION SWITCHBLADE®



IPX4

Rechargeable, compact, 180° articulating, multi-function light bar


- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- PiggyBack® charger option for extra battery, ready to replace and use whenever you need it
- Lithium-ion battery recharges in 4 hours

	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	500	400	500 mW
RUN TIME	3 hrs	3 hrs	5 hrs

**Color-  
Rite®**



Description	Item #
Strion Switchblade - with USB cord - Red	74850
Strion Switchblade - 120V/100V AC - 1 holder - Red	74851
Strion Switchblade - 120V/100V AC PiggyBack - Red	74854
Size and Weight	Battery
Folded - 6" (15.24 cm); Extended - 10.75" (27.3 cm); 6.4 oz (181g)	Lithium-ion

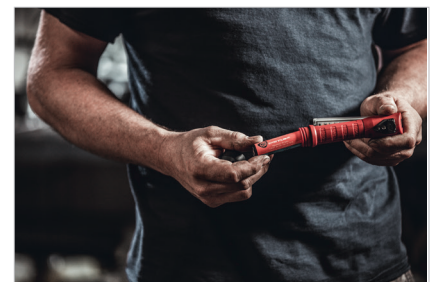



# BEARTRAP® 360



IPX4

Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it, hang it or use its magnetic base
- Will continue to charge while plugged in and in use

	SPOT			FLOOD		
	HIGH	MEDIUM	LOW	HIGH	MEDIUM	LOW
LUMENS	1,000	450	325	2,000	1,000	575
CANDELA	7,500	3,600	2,500	1,200	680	360
DISTANCE	174m	120m	100m	69m	52m	38m
RUN TIME	4.5 hrs	8.75 hrs	12.5 hrs	2.5 hrs	5 hrs	8.75 hrs



Description	Item #
BearTrap 360 - 120V/100V AC - Red	61523
Size and Weight	Battery
7.62" (19.35 cm); 2 lbs 5 oz (1049g)	Lithium-ion



## SYCLONE®



**Color-  
Rite®**

Compact, rechargeable work light with Color-Rite Technology®

- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam



Description	Item #
Syclone - Includes USB cord - Red	61510






Size and Weight	Battery
2.97" (7.54 cm); 5.3 oz (150g)	Lithium Polymer

SPOT/COOL WHITE	HIGH	MEDIUM	LOW
LUMENS	400	200	100
DISTANCE	141m	95m	72m
RUN TIME	2 hrs	4.5 hrs	9.5 hrs
FLOOD/90 CRI	HIGH	MEDIUM	LOW
LUMENS	300	150	75
DISTANCE	48m	35m	24m
RUN TIME	2 hrs	4 hrs	8 hrs

Color Temperature 4,000K

## WORK LIGHT ACCESSORIES

DESCRIPTION	ITEM #	BEARTRAP 360	STRION SWITCHBLADE	STINGER SWITCHBLADE	SYCLONE
Stinger 6 Unit Bank Charger 120V	75600			✓	
Strion 6 Unit Bank Charger 12V	74401		✓		
Strion 6 Unit Bank Charger 120V	74400		✓		
PiggyBack® Charger *batteries/cord sold separately	74115		✓		
Smart Charger Holder *cord sold separately	75105			✓	
Charger Holder *cord sold separately	74102		✓		
Lithium-ion Battery - BearTrap Series	61522	✓			
Battery Stick - Lithium-ion	74175		✓		
Stinger Switchblade Battery	76805			✓	
12V DC Adapter	44923	✓			
120V USB Charge Cord	22060		✓	✓	
12V DC1 Charge Cord	22051		✓	✓	
12V DC2 Charge Cord	22050		✓	✓	
40" Micro-USB Cord	22070		✓	✓	✓
22" Micro-USB Cord	22081			✓	✓
120V AC USB Charge Cord	22071			✓	
120V AC Cord	44922	✓			



## POLYSTINGER® LED HAZ-LO®



Durable, safety-rated, rechargeable flashlight

- Unbreakable, scratch-resistant polycarbonate lens
- Non-conductive, corrosion-resistant body
- Moonlight mode runs 20 days

	HIGH	LOW
LUMENS	260	80
CANDELA	16,000	5,700
DISTANCE	253m	151m
RUN TIME	5 hrs	16 hrs

Moonlight mode runs 20 days



Class I, II, Div. 1, Groups C, D, F, G;  
Class III, 138°C (T3C)  
Non-Incandescent: Class I, Div. 2  
Groups A, B, C, D

Description	Item #
PolyStinger LED HAZ-LO - 120V AC /12V DC - Yellow	76412
Size and Weight	Battery
10.2" (25.9 cm); 13.5 oz (382g)	NiMH



## ALL PURPOSE POLYMER FLASHLIGHT

## POLYSTINGER® LED



All-purpose, polymer flashlight is designed for the broadest range of lighting needs at the best value

- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes: high, medium, low and strobe
- Non-conductive, super-tough nylon polymer with rubberized grip

Description	Item #
PolyStinger LED - 120V AC /12V DC - Yellow	76163
PolyStinger LED - 120V AC /12V DC - Black	76113

Size and Weight	Battery
8.07" (20.5 cm); 11.5 oz (326g)	NiMH

	HIGH	MEDIUM	LOW
LUMENS	485	240	120
CANDELA	28,000	14,000	7,000
DISTANCE	335m	237m	167m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours



## STINGER® 2020



Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch for ease of use
- Multiple charging options; recharges in 8 hours
- Anti-roll design

	HIGH	MEDIUM	LOW
<b>LUMENS</b>	2,000	850	100
<b>CANDELA</b>	25,000	10,000	1,200
<b>DISTANCE</b>	315m	200m	70m
<b>RUN TIME</b>	2 hrs	4 hrs	24 hrs

Strobe runs 3.25 hours



Description	Item #
Stinger 2020 - 120V AC/12V DC - 1 holder - Black	78101
Stinger 2020 - 120V AC/12V DC - 1 holder - Red	78121
Stinger 2020 - 120V AC/12V DC - 1 holder - Blue	78131
Stinger 2020 - 12V DC - 1 holder - Black	78104
Stinger 2020 - Light only - Includes "Y" USB cord - Black	78100
Stinger 2020 - Light only - Includes "Y" USB cord - Red	78120
Stinger 2020 - Light only - Includes "Y" USB cord - Blue	78130

Size and Weight	Battery
7.67" (19.48 cm); 12.3 oz (350g)	(2) SL-B26 battery packs



Intuitive mode selector switch

## STRION® 2020



Compact, high-lumen flashlight with intuitive mode selector switch

- Features independently functioning head and tail switches
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available (as shown to the right)

Description	Item #
Strion 2020 - 120V/100V AC - 1 Holder - Black	74431
Strion 2020 - 120V/100V AC - PiggyBack - Black	74435

Size and Weight	Battery
6.33" (16.1 cm); 5.7 oz (161.1g)	Lithium-ion



	HIGH	MEDIUM	LOW
<b>LUMENS</b>	1,200	460	120
<b>CANDELA</b>	28,000	10,000	3,000
<b>DISTANCE</b>	335m	200m	110m
<b>RUN TIME</b>	1.75 hrs	5.5 hrs	12 hrs




Strobe runs 3.5 hours



## STINGER / STRION ACCESSORIES

DESCRIPTION	ITEM #	STINGER 2020	STINGER SWITCHBLADE	POLYSTINGER LED HAZ-LO	POLYSTINGER LED	STRION 2020	STRION SWITCHBLADE
5-Unit Bank Charger	75400	✓	✓	✓	✓		
5-Unit Bank Charger	74400					✓	✓
Smart Charger <i>*cord sold separately</i>	75105	✓	✓	✓	✓		
Smart PiggyBack® Charger <i>*cord sold separately</i>	75277				✓		
Charger Holder	74102					✓	✓
PiggyBack® Charger <i>*battery sold separately</i>	74115					✓	✓
Li-Ion Battery Stick	75176				✓		
NiMH Battery Stick	76375			✓			
NiMH Battery Stick	75375				✓		
Lithium-ion Battery	74436					✓	
Lithium-ion Battery	76805		✓				
Lithium-ion Battery	74175						✓
SL-B26 Battery Pack	78105	✓					
12V DC1 Charge Cord	22051	✓	✓	✓	✓	✓	
12V DC2 Charge Cord	22050	✓	✓	✓	✓	✓	✓
120V AC Charge Cord	22071	✓	✓	✓	✓	✓	
40" USB Cord	22070	✓	✓				✓
22" USB Cord	22081	✓	✓				
"Y" USB-C Cord	22090	✓					
Leather Plain Holster	75133			✓	✓		
Leather Plain Holster	74060					✓	
Leather Weave Holster	78114	✓					
Leather Weave Holster	74059					✓	
Leather Weave Holster	75134			✓	✓		
Nylon Holster	85905					✓	
Nylon Holster	75927				✓		
Deluxe Nylon Holster	78107	✓					
Loop Nylon Holster	75928			✓	✓		
Tactical Holster	88051					✓	
Vertical Grip with Rail	69114					✓	
Ring Holder	75906			✓	✓		
Facecap Ring Kit	78113	✓					
Safety Wand - Red	75933			✓	✓		
Safety Wand - Yellow	75934			✓	✓		
Safety Wand - Glow in the Dark	75943			✓	✓		
Safety Wand - Red	74903					✓	
Safety Wand - Yellow	75904					✓	
Safety Wand - White	75908	✓	✓	✓			
Safety Wand - Glow in the Dark	75913					✓	
Red Flip Filter	85115					✓	
Blue Flip Filter	85116					✓	
Green Flip Filter	85117					✓	
Red Flip Filter	75115			✓			
Blue Flip Filter	75116			✓			
Green Flip Filter	75117			✓			
Infrared Flip Filter	75027			✓			

*\*\*Images of accessories on the next page*

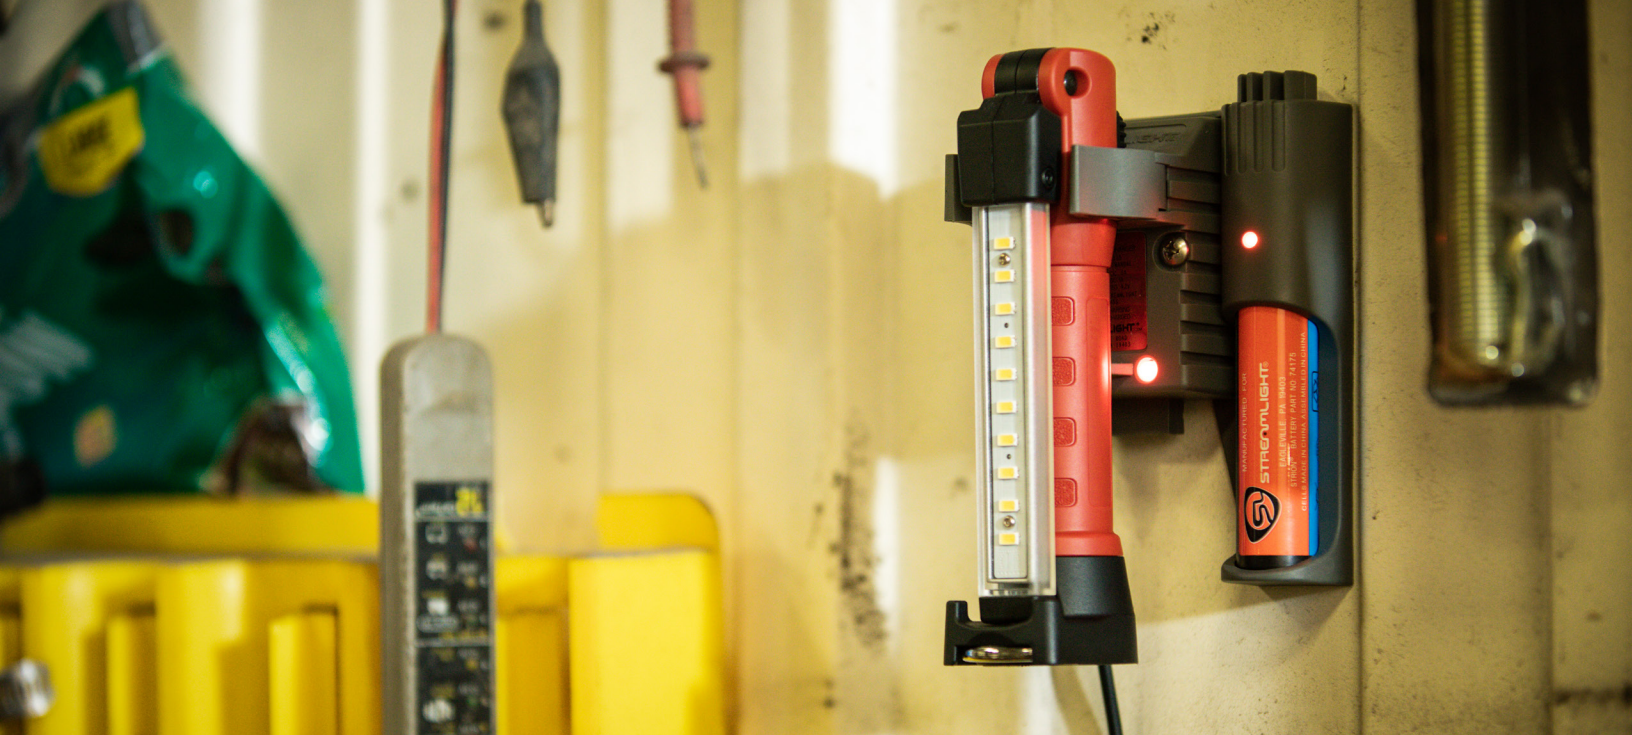



# SURVIVOR® SERIES

## SURVIVOR® X



IP67

Right angle, lightweight flashlight because we understand that every ounce counts

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME Lithium	3.75 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		

Description	Orange	Yellow
Survivor X - 120V/100V AC/12V DC	90952	90962
Survivor X - Alkaline	90950	90960

Note: The Survivor X is not compatible with legacy Survivor chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g)	Rechargeable lithium-ion battery pack or (3) AA alkaline

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1, Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T3/T4

### NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)

## SURVIVOR® X USB



IP67

USB rechargeable, right-angle flashlight

- Rubber dome push button switch is designed for easy operation
- Spring-loaded clip securely grabs onto belts and gear; D-ring provides forward-hanging orientation
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME SL-B26	4 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs
Flash runs 8 hours		

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

### NFPA

Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



Class I, II, Div. 2, Grps. A, B, C, D, F, G;  
Class III, T-Code: T4

Description	Orange	Yellow
Survivor X USB - Includes (1) SL-B26 battery pack	90044	90244

Note: The Survivor X is not compatible with legacy Survivor chargers.

Size and Weight	Battery
7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // SL-B26: 11.9 oz (337g)	SL-B26 battery pack or (3) AA alkaline

# SURVIVOR PIVOT® // SURVIVOR PIVOT® USB



Multi-function, dual-beam flashlight with a 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	300	70	300	70	325	80
CANDELA	34,000	8,500	300	75	19,000	5,000
DISTANCE	369m	184m	35m	17m	276m	141m
RUN TIME Lithium	4.25 hrs	16 hrs	4.25 hrs	16 hrs	3.75 hrs	13 hrs
RUN TIME Alkaline	5.5 hrs	15 hrs	5.5 hrs	15 hrs	4.5 hrs	12 hrs



## Survivor Pivot Safety Ratings



**NFPA**  
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 1,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T3/T4

## Survivor Pivot USB Safety Ratings

**NFPA**

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, Div. 2,  
Grps. A, B, C, D, E, F, G;  
Class III, T-Code: T4

Description	Orange	Yellow
Survivor Pivot - 120V/100V AC/12V DC	91802	91812
Survivor Pivot - Alkaline - Includes battery carrier	91800	91810
Survivor Pivot Magnet - 120V/100V AC/12V DC	91830	91831
Survivor Pivot Magnet - Alkaline - Includes battery carrier	91825	91826

Description	Orange	Yellow
Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier	91804	91814
Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier	91838	91839

## Size and Weight

7.93" (20.14 cm);  
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)  
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) W/MAGNET

USB Model: 7.93" (20.14 cm)  
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)  
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

## Battery

Rechargeable lithium-ion battery pack, SL-B26 or (3) AA alkaline

Note: The Survivor Pivot® is not compatible with legacy Survivor chargers



Strong spring-loaded clip securely grabs onto jackets and gear; D-ring provides forward hanging orientation



Optional magnet



# LANTERN AND PORTABLE SCENE LIGHT SERIES

## VULCAN CLUTCH®



**IP67**

### NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Multi-function lantern with adjustable head and versatile clamping handle

- 340° articulating head aims the beam where you need it
- 20° downcast head for footpath lighting
- Flash mode for use as an exit marker/warning beacon
- Three white LEDs produce extreme brightness and two ultra-bright blue taillight LEDs provide visibility from behind

	HIGH	LOW
LUMENS	1,700	380
CANDELA	67,500	15,000
DISTANCE	520m	245m
RUN TIME	6.5 hrs	18 hrs

Flash runs 25 hours



### Description

Vulcan Clutch - 120V/100V AC/12V DC - Includes quick release shoulder strap - Orange	44361
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes quick release shoulder strap - Orange	44365
Vulcan Clutch - Light Only - Includes quick release shoulder strap - Orange	44360
Vulcan Clutch - 120V/100V AC/12V DC - Includes heavy duty shoulder strap - Yellow	44371
Vulcan Clutch - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap - Yellow	44375
Vulcan Clutch - Light Only - Includes heavy duty shoulder strap - Yellow	44370



### Item #

### Size and Weight

9.39" (23.85 cm); 2.84 lbs (1.288kg)

### Battery

Lithium-ion

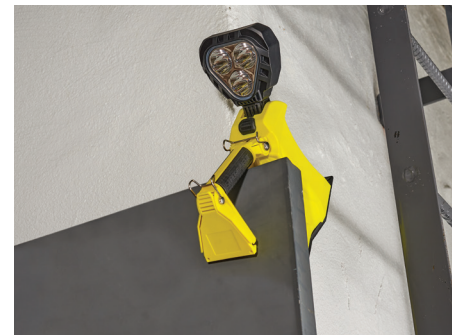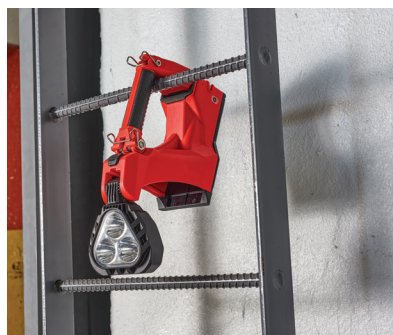

# VULCAN® 180 HAZ-LO®

Portable lantern developed for use in hazardous locations

- 180° tilting head for precise light direction
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Rechargeable with battery status/ charge indicator; recharges in 15 hours

	HIGH	LOW
LUMENS	400	130
CANDELA	25,000	8,000
DISTANCE	316m	179m
RUN TIME	10 hrs	24 hrs

Description	Yellow	Orange
Vulcan 180 HAZ-LO - Standard System - 120V AC/12V DC, Includes quick release shoulder strap	44321	44331
Vulcan 180 HAZ-LO - Vehicle Mount System - 12V DC, Includes quick release shoulder strap	44325	44335
Size and Weight	Battery	
7.43" (18.87 cm); 2.45 lbs (1.111kg)	Lithium-ion	



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



Class I, II, III, Div. 1, Grps. A, B, C, D, E, F, G; Class I, Zone 0, Grps. IIC, Class III; T-Code: T4

# VULCAN® 180

Rechargeable, waterproof lantern built for hazardous locations

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 9 hours

	HIGH	LOW
LUMENS	1,200	350
CANDELA	75,000	22,000
DISTANCE	548m	296m
RUN TIME	5.75 hrs	16 hrs

Description	Yellow	Orange
Vulcan 180 - Standard System - 120V/100V AC/12V DC - Includes quick release strap	44307	44311
Vulcan 180 - Vehicle Mount System - 12V DC - Includes heavy duty shoulder strap	44305	44315
Size and Weight	Battery	
7.43" (18.8 cm); 2.47 lbs (1.12kg)	Lithium-ion	



Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III; T-Class: T4

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

# E-SPOT® LITEBOX®



IPX4

Lightweight, high candela lantern with articulating head

- 90° swivel neck to aim the beam where you need it
- Four LEDs with deep parabolic reflectors for a long-range, spot beam pattern
- Recharges in 7 hours



Description	Orange	Yellow
E-Spot LiteBox - 120V AC/12V DC - Includes shoulder strap and mounting rack	45851	45871
E-Spot LiteBox Vehicle Mount System - 12V DC - Includes shoulder strap	45855	45875
E-Spot LiteBox Power Failure System - 120V AC/12V DC - Includes mounting rack	45857	--
E-Spot LiteBox - Light Only	45856	45876

	HIGH	LOW
LUMENS	1,500	350
CANDELA	110,000	25,000
DISTANCE	663m	316m
RUN TIME	11 hrs	28 hrs

Size and Weight	Battery
11.2" (28.4 cm); 3.1 lbs (1.389kg)	Lithium-ion

NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



# PORTABLE SCENE LIGHT II



IPX7

Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for "light tower" capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.

	100%	80%	60%	40%	20%
LUMENS	10,000	8,300	6,300	4,500	2,300
RUN TIME	2 hrs	2.75 hrs	3.75 hrs	5.75 hrs	11 hrs



Description	Item #
Portable Scene Light II - 120V/12V DC - Red	46000

Size and Weight	Battery
16" (40.6 cm); 15.56 lbs (7.06kg)	Lithium-ion

PORTABLE SCENE LIGHT

Portable and collapsible flood light with extreme brightness

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space, rugged enough to withstand rough terrain and resists 40 mph winds



IP67

	HIGH	MEDIUM	LOW
LUMENS	10,000	5,300	2,000
CANDELA	95,000	49,500	22,450
DISTANCE	616	445	300
RUN TIME	2 hrs	4 hrs	12 hrs



Portable Scene Light: pole extends to 72" (182.88 cm)

Portable Scene Light EXT: pole extends to 84" (213.36 cm)

Description	Item #
Portable Scene Light - 120V AC/12V DC - Yellow	45670
Portable Scene Light EXT - 120V AC/12V DC - Yellow	45680

Size and Weight	Battery
22.5" (57.2 cm); 25.8 lbs (11.7kg)	Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord
EXT - 25.5" (64.8 cm); 26.3 lbs (11.9kg)	





## THE SIEGE®



Lantern powerful enough to light up a large area

- Runs over 30 hours on high and 12 days on low
- Battery indicator flashes when battery is low
- Three white light settings, a red light for softer light and an SOS mode
- Ergonomic handle with incorporated D-rings to hang

WHITE	HIGH	MEDIUM	LOW
LUMENS	540	275	55
RUN TIME	30 hrs	70 hrs	295 hrs
RED	HIGH	SOS	
LUMENS	10	10	
RUN TIME	235 hrs	430 hrs	



Description	Item #
The Siege - Coyote	44931

Size and Weight	Battery
7.25" (18.41 cm); 1 lb 15 oz (878.83g)	(3) D Batteries

## WAYPOINT® 400



Rechargeable spotlight with far reaching beam for long range targeting

- Integrated stand for hands-free lighting
- Recharges in 4 hours
- Trigger style switch, secondary mode selector switch

Description	Item #
Waypoint 400 - 120V AC - Yellow	44910
Waypoint 400 - 120V AC - Black	44911



Size and Weight	Battery
6.75" (17.14 cm); 1.52 lbs (691g)	Lithium-ion

	HIGH	MEDIUM	LOW
LUMENS	1,400	600	38
CANDELA	400,000	165,000	10,000
DISTANCE	1,265m	812m	200m
RUN TIME	3.25 hrs	7.5 hrs	84 hrs



## LANTERN ACCESSORIES

DESCRIPTION	ITEM #	VULCAN 180	VULCAN 180 HAZ-LO	VULCAN CLUTCH	PORTABLE SCENE LIGHT	PORTABLE SCENE LIGHT II	E-SPOT LITEBOX	WAYPOINT 400
Standard Mounting Rack - Orange	45070						✓	
Vehicle Mounting Rack - Orange	45071						✓	
Vehicle Mounting Rack - Yellow	45074						✓	
Standard Charging Rack - Black	44350	✓	✓	✓				
Direct Wire 12V DC Charge Kit - Black	44306	✓	✓	✓				
12V DC (Car Socket) Charge Cord	22051	✓	✓	✓			✓	
12V DC2 Charge Cord	22050	✓		✓			✓	
120V AC Charge Cord	22060	✓	✓	✓			✓	
120V AC Charge Cord	44909							✓
Power Supply	22083				✓	✓		
120V AC Charge Cord	22074				✓	✓		
12V Power Cord	44923							✓
Polymer Storage Mount	44918							✓
Battery (Sealed Lead Acid)	45630				✓			
Battery (Lithium-ion)	44366			✓				
Battery (Lithium-ion)	45938						✓	
Battery (Lithium-ion)	44351	✓						
Battery (Lithium-ion)	44353		✓					
Battery Pack (Lithium-ion)	46005					✓		
Quick Release Strap	44050	✓	✓	✓			✓	
Heavy Duty Shoulder Strap with Carabiner Lock	45677				✓			



# WEDGE® XT



Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	500	50
CANDELA	1,900	200
DISTANCE	87m	28m
RUN TIME	2 hrs	11 hrs

Description	Item #
Wedge XT - Includes USB-C cord, lanyard - Black	88812
Wedge XT - Includes USB-C cord, lanyard - Coyote	88813
Wedge XT - Includes USB-C cord, lanyard - Silver	88819

Size and Weight	Battery
4.25" (10.8 cm); 2.62 oz (74.3g)	Lithium Polymer



Charge indication LED:  
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours



Everyday carry flashlight available in multiple colors, making it easier to locate

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip

	THRO	CONSTANT-ON
LUMENS	1,000	300
CANDELA	3,000	1,200
DISTANCE	110m	69m
RUN TIME	35 sec	3 hrs



Battery charge indicator located in the on/off switch

Charge indication:

Red – Charging // Green – Charged

Recharges in 5 hours

Description	Item #
Wedge - Includes USB-C cord, lanyard - Box - Black	88810
Wedge - Includes USB-C cord, lanyard - Box - Coyote	88811
Wedge - Includes USB-C cord, lanyard - Box - Red	88814
Wedge - Includes USB-C cord, lanyard - Box - Blue	88817
Wedge - Includes USB-C cord, lanyard - Box - Purple	88818
Wedge - Includes USB-C cord, lanyard - Box - Orange	88820
Wedge - Includes USB-C cord, lanyard - Box - Lime Green	88821

Size and Weight	Battery
5.46" (13.87 cm); 3.3 oz (93.5g)	Lithium Polymer

RECHARGEABLE EDC FLASHLIGHT

Lightweight and high performance designed for clean pocket carry with an intuitive rotating thumb switch providing tactical mode control



Rotatable switch with battery level indicator



**NEW**

## MEGASTREAM® HP USB



Powerhouse, high candela, long range hand held flashlight designed to clip to your pocket

- Power up via the charge port in the body or swap out the removable battery to charge while using a fresh one
- Slide the head cover back for USB-C port; recharges in 5 hours
- Powered by a SL-B34® rechargeable battery pack

	HIGH	MEDIUM	LOW
LUMENS	1,350	470	145
CANDELA	310,000	108,000	32,000
DISTANCE	1,114m	657m	358m
RUN TIME	2 hrs	4 hrs	15 hrs

Description	Item #
MegaStream HP USB - Includes USB-C cord, holster and (1) SL-B34 battery pack - Black	66211

Size and Weight	Battery
6.61" (16.8 cm); 9 oz (254g)	(1) SL-B34 battery pack



## MEGASTREAM® USB



Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- Hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Sliding sleeve protects the USB port; recharges in 5 hours
- Powered by a SL-B34® rechargeable battery

	HIGH	MEDIUM	LOW
LUMENS	1,800	500	150
CANDELA	26,000	7,200	2,100
DISTANCE	322m	170m	92m
RUN TIME	2 hrs	3.5 hrs	13 hrs

Description	Item #
MegaStream USB - Includes USB-C cord, lanyard and (1) SL-B34 battery pack - Black	66210

Size and Weight	Battery
5.3" (13.4 cm); 5.4 oz (152g)	(1) SL-B34 battery pack



## MICROSTREAM®



IPX4

Ultra-compact personal light

- Clip it to your hat or pocket for hands-free use
- Alkaline battery powered
- Push button tailswitch



LUMENS	45
CANDELA	420
DISTANCE	41m
RUN TIME	2.25 hrs

Description	Item #
MicroStream - Includes (1) AAA alkaline battery - Black	66318

Size and Weight	Battery
3.6" (9.15 cm); 1.1 oz (31.2g)	(1) AAA alkaline battery

## MACROSTREAM® USB



IPX4

High-power, rechargeable flashlight with high and low modes

- Lithium-ion battery charges in 4 hours
- Durable aluminium construction
- Metal sleeve protects charge port; slide back to use



	HIGH	LOW
LUMENS	500	50
CANDELA	2,000	220
DISTANCE	90m	30m
RUN TIME	2 hrs	8 hrs

Description	Item #
MacroStream USB - Includes USB cord and lanyard - Black	66320

Size and Weight	Battery
4.5" (11.43 cm); 2.2 oz (62.4g)	Lithium-ion

## MICROSTREAM® USB



IPX4

Rechargeable pocket light with high and low modes

- Discreet light that fits in your pocket
- Clip it to your pocket or hat for hands-free use
- USB rechargeable – metal sleeve protects charge port; slide sleeve forward to reveal charge port

	HIGH	LOW
LUMENS	250	50
CANDELA	1,150	250
DISTANCE	68m	31m
RUN TIME	1.5 hrs	3.5 hrs



Description	Item #
MicroStream USB - Includes USB cord and lanyard - Box - Black	66604
MicroStream USB - Includes USB cord and lanyard - Box - Coyote	66609

Size and Weight	Battery
3.87" (9.83 cm); 1.2 oz (34.1g)	Lithium-ion



## STYLUS PRO®



IPX4

High performance penlight

- Fits easily in your pocket
- Push button tail switch
- Includes nylon holster

LUMENS	100
CANDELA	950
DISTANCE	62m
RUN TIME	8 hrs



Description	Item #
Stylus Pro - Includes (2) AAA alkaline batteries - Black	66118
Stylus Pro - Includes (2) AAA alkaline batteries - Silver	66121
Stylus Pro - Includes (2) AAA alkaline batteries - Red	66120
Stylus Pro - Includes (2) AAA alkaline batteries - Blue	66122
Stylus Pro - Includes (2) AAA alkaline batteries - Lime Green	66129
Stylus Pro - Includes (2) AAA alkaline batteries - Orange	66128

Size and Weight	Battery
5.3" (13.4 cm); 1.64 oz (46.9g)	(2) AAA alkaline batteries

## STYLUS PRO® USB // STYLUS PRO® USB UV



IPX4

Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode
- UV Model features a purple sleeve for easy identification

WHITE LED	HIGH	LOW
LUMENS	350	90
CANDELA	2,950	840
DISTANCE	109m	58m
RUN TIME	1.5 hrs	3.5 hrs



Description	Item #
Stylus Pro USB - 120V AC with holster - Black	66133
Stylus Pro USB - Includes USB cord and holster - Black	66134
Stylus Pro USB UV - 120V AC with holster - Black	66148
Stylus Pro USB UV - Includes USB cord and holster - Black	66149

Size and Weight	Battery
5.95" (15.1 cm); 1.8 oz (51g)	Lithium-ion

400NM UV LED	
OUTPUT	250mW
RUN TIME	2.5 hrs



**IPX4**

## POCKET MATE®

Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

	HIGH	LOW
LUMENS	325	45
CANDELA	1,450	200
DISTANCE	76m	28m
RUN TIME	20 min	1 hr

Description	Item #
Pocket Mate - Includes Micro-USB cord - Silver	73300
Pocket Mate - Includes Micro-USB cord - Red	73301
Pocket Mate - Includes Micro-USB cord - Blue	73302
Pocket Mate - Includes Micro-USB cord - Pink	73303

Size and Weight	Battery
2" (5.1 cm); 0.5 oz (14.2g)	Lithium polymer

**IPX7**

## NANO LIGHT® II

Ultra-compact key chain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

LUMENS	20
CANDELA	120
DISTANCE	22m
RUN TIME	1 hr

Description	Item #
Nano Light II - Includes (1) AAAA alkaline battery - Black	73020

Size and Weight	Battery
2.2" (5.7 cm); 0.6 oz (18g)	(1) AAAA alkaline



## STREAMLIGHT® JR. F-STOP®

**IPX4**

Handheld flood to spot work light

- It provides a smooth flood beam to illuminate your work area without tiring your eyes
- Slide the lens forward for a smooth transition to a spot beam for distance lighting

	FLOOD	SPOT
LUMENS	250	220
CANDELA	360	5,600
DISTANCE	38m	150m
RUN TIME Alkaline	6 hrs	6 hrs
RUN TIME Lithium	10 hrs	10 hrs

Description	Item #
Streamlight Jr. F-Stop - Includes (2) AA alkaline batteries - Box - Black	71701
Nylon Holster	71503
Rubber Helmet Strap	99075

Size and Weight	Battery
6.5" (16.51 cm); 4.4 oz (125g)	(2) AA alkaline or lithium



# PROTAC<sup>®</sup> 2.0 HP



## PROTAC<sup>®</sup> 2.0



High-performance light that produces 2,000 lumens without sacrificing run time

- TEN-TAP<sup>®</sup> Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges (6 hours) inside the light

	HIGH	MEDIUM	LOW
LUMENS	2,000	570	100
CANDELA	17,300	5,000	890
DISTANCE	262m	142m	60m
RUN TIME	2.5 hrs	4.5 hrs	25 hrs

Strobe runs 4 hours 25 minutes



Description	Item #
ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89000

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

**NEW**

## PROTAC<sup>®</sup> 2.0 HP



High-candela flashlight strikes the ideal balance between candela & lumens, ensuring both reach and brightness without compromise

- TEN-TAP<sup>®</sup> Programmable
- One-handed option of momentary, variable intensity or strobe mode
- Slide sleeve back to charge battery while inside the light; fully recharges in 6 hours

	HIGH	MEDIUM	LOW
LUMENS	2,000	550	100
CANDELA	85,000	22,500	4,400
DISTANCE	583m	300m	132m
RUN TIME	2.5 hrs	5 hrs	31 hrs

Strobe runs 2 hours



Description	Item #
ProTac 2.0 HP - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89023

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

## PROTAC® 2AA-X



IPX7

Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

Lithium Polymer	HIGH	LOW
<b>LUMENS</b>	550	40
<b>CANDELA</b>	10,250	740
<b>DISTANCE</b>	203m	54m
<b>RUN TIME</b>	2.25 hrs	16 hrs

Strobe runs 4.5 hours

AA	HIGH	LOW
<b>LUMENS</b>	270	18
<b>CANDELA</b>	5,000	400
<b>DISTANCE</b>	141m	40m
<b>RUN TIME</b>	2.5 hrs	48 hrs

Strobe runs 5 hours

Description	Item #
ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Black	88135
ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Coyote	88137
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black	88033
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Coyote	88072

Size and Weight	Battery
6" (15.3 cm); 3.5 oz (99g)	Lithium polymer USB rechargeable battery or (2) AA alkaline



## PROTAC® 2L-X



IPX7

Multi-fuel tactical light

- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation
- Pocket clip for convenience

Description	Item #
ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Black	88063
ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Black	88083

Size and Weight	Battery
5.14" (13 cm); SL-B26: 4.4 oz (125g) // CR123A: 3.9 oz (111g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	LOW
<b>LUMENS</b>	500	40
<b>CANDELA</b>	6,800	600
<b>DISTANCE</b>	165m	49m
<b>RUN TIME CR123A</b>	2.75 hrs	30 hrs
<b>RUN TIME SL-B26</b>	3.25 hrs	30 hrs

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)



## PROTAC® HL USB



IPX4

A multi-fuel, tactical flashlight that produces a high-lumen beam

- TEN-TAP® Programmable
- Self-adjusting battery cavity secures multiple battery sizes
- USB rechargeable - works with almost any USB source

Description	Item #
ProTac HL USB - Includes USB cord and nylon holster - Black	88052
ProTac HL USB - 120V AC/12V DC - Includes USB cord and nylon holster - Black	88054

Size and Weight	Battery
6.5" (16.5 cm); 7.2 oz (204g)	(1) Streamlight lithium-ion cell pack (#74175); also accepts (2) CR123A lithium batteries or (1) SL-B26 battery pack

	HIGH	MEDIUM	LOW
LUMENS	1,000	380	65
CANDELA	12,000	4,420	700
DISTANCE	219m	133m	53m
RUN TIME	1.5 hrs	3.5 hrs	23 hrs

Strobe runs 1.5 hours



## PROTAC® HL-X



IP68

Multi-fuel flashlight with a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

Description	Item #
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Black	88065
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Black	88085

Size and Weight	Battery
5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

CR123A	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	27,100	10,000	1,600
DISTANCE	330m	200m	80m
RUN TIME	1.25 hrs	3 hrs	20 hrs

Strobe runs 2.5 hours



SL-B26	HIGH	MEDIUM	LOW
LUMENS	1,300	420	70
CANDELA	35,000	11,000	1,800
DISTANCE	374m	210m	85m
RUN TIME	1.5 hrs	3.75 hrs	25 hrs

Strobe runs 3.25 hours

**NEW**

## PROTAC® HP-X



IP68

Unique combination of compact size, high candela and long distance performance flashlight

- Designed for industrial needs such as inspecting power lines for failed fuses or monitoring overhead conveyor belts for proper tension
- TEN-TAP® Programmable
- Multi-fuel - SL-B26 or lithium batteries

Description	Item #
ProTac HP-X - Includes (2) CR123A lithium batteries and holster - Black	89021
ProTac HP-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Black	89022

Size and Weight	Battery
5.55" (14.1 cm); SL-B26: 5.9 oz (168g) // CR123A: 5.4 oz (154g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	MEDIUM	LOW
LUMENS	800	240	45
CANDELA	105,000	34,000	6,300
DISTANCE	648m	369m	159m
RUN TIME CR123A	1.5 hrs	4.25 hrs	24 hrs
RUN TIME SL-B26	2 hrs	5 hrs	31 hrs

Strobe runs 3 hours (CR123A) // 4.25 hours (SL-B26)



**5300**  
LUMENS

**80,000 cd**

**2 HOURS**



## PROTAC HL® 6



Full-size, high-lumen, rechargeable flashlight

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

	HIGH	MEDIUM	LOW
LUMENS	5,300	1,500	450
CANDELA	80,000	23,000	6,700
DISTANCE	566m	303m	164m
RUN TIME	2 hrs	3.75 hrs	12.5 hrs

Strobe runs 4 hours

Description	Item #
ProTac HL 6 - Includes 120V AC Adapter, (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black	88131
ProTac HL 6 - Includes (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black	88132

Size and Weight	Battery
10.5" (26.6 cm); 1.3 lbs (590g)	(2) SL-B48 battery pack



# POLYTAC 90® X



Multi-fuel, rugged, flashlight with a right angled head

- Durable construction
- Integrated carabiner style D-ring for a variety of attachment methods
- Multi-function push-button switch

Description	Item #
PolyTac 90 X - Includes (2) CR123A lithium batteries - Yellow	88831
PolyTac 90 X USB - Includes (1) SL-B26 battery pack and USB cord - Yellow	88836

Size and Weight	Battery
4.43" (11.25 cm); SL-B26: 4.8 oz (136g) // CR123A: 4.3 oz (122g)	(1) SL-B26 battery pack; or (2) CR123A lithium batteries

	HIGH	LOW
LUMENS	500	85
CANDELA	7,000	1,050
DISTANCE	167m	64m
RUN TIME CR123A	2.5 hrs	12 hrs
RUN TIME SL-B26	3.75 hrs	19 hrs



NFPA Meets requirements of NFPA 1970-14.2 (2025)

# POLYTAC® X



Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

Description	Item #
PolyTac X - Includes (2) CR123A lithium batteries - Yellow	88604
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Yellow	88614

Size and Weight	Battery
5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,485	4,930	675
DISTANCE	205m	135m	50m
RUN TIME CR123A	2.75 hrs	5.5 hrs	34 hrs
RUN TIME SL-B26	3.5 hrs	5.75 hrs	36 hrs

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)



NFPA Flashlight meets 500°F requirements of NFPA 1970-14.2 (2025)



## PROTAC // POLYTAC ACCESSORIES

DESCRIPTION	ITEM #	PROTAC 2AA-X USB	PROTAC 2.0 SERIES	PROTAC 2L-X	PROTAC HL USB	PROTAC HL-X	PROTAC HP-X	PROTAC HL 6	POLYTAC 90 X	POLYTAC X
CR123A Lithium-ion Batteries - 2pk	85175			√	√	√	√		√	√
CR123A Lithium-ion Batteries - 6pk	85180			√	√	√	√		√	√
CR123A Lithium-ion Batteries - 12pk	85177			√	√	√	√		√	√
CR123A Lithium-ion Batteries - 400pk	85179			√	√	√	√		√	√
SL-B26 Battery Pack - 1pk	22101			√	√	√	√		√	√
SL-B50 Battery Pack - 1pk	22111		√							
SL-B50 Battery Pack - 2pk	22112		√							
SL-B48 Battery Pack - 2pk	88133							√		
Lithium Polymer Battery Pack	88136	√								
120V AC USB Charge Cord	22071				√					
22" (55.88 cm) USB-C Cord	22084	√	√	√	√	√	√		√	√
"Y" USB-C Cord	22090									
Nylon Holster	88036			√						
Nylon Holster	88038	√								
Nylon Holster	88086				√					
Nylon Holster	85905									√
Poly Mount Kit	68089									√
Helmet Mount	68085									√
Flip Lens - Red	88115									√
Flip Lens - Blue	85116									√
Flip Lens - Green	85117									√
Flip Lens - IR	74039									√
Safety Wand	88057		√		√	√	√			
Rubber Helmet Strap	99075									√




## SL-B26<sup>®</sup> PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

Description	Item #
SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk	22101
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk	22102
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk - Box	22104
SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk	22105
SL-B26 Charge Cradle	22100
SL-B26 Charger Kit - Includes USB Cord and (2) SL-B26 battery packs	22010
SL-B26 Charger Kit - Includes 120V AC and (2) SL-B26 battery packs	22011
40" (106.1 cm) USB Cord - for use with the charger kit	22070
22" (55.88 cm) USB Cord - for use with the charger kit	22081
40" (106.1 cm) USB-C Cord - for use with the SL-B26 battery pack	22091
22" (55.88 cm) USB-C Cord - for use with the SL-B26 battery pack	22084

Size and Weight	Battery
2.75" (7 cm); 1.7 oz (48g) - Battery	2600mAh SL-B26 protected
4.5" (11.4 cm); 2.4 oz (68g) - Cradle	Li-Ion USB rechargeable battery pack

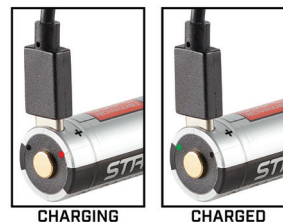

## EIGHT-UNIT SL-B26<sup>®</sup> BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

Description	Item #
8-Unit SL-B26 Bank Charger - 120V AC - batteries not included	20221
8-Unit SL-B26 Bank Charger - 12V DC - batteries not included	20220
8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 120V AC	20224
8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 12V DC	20223
120V AC Cord	44909
12V DC Cord	44923

Size and Weight
10.45" x 4.74" x 1" (26.54 x 12.06 x 2.54 cm)
7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries



### NFPA

Meets requirements of  
NFPA 1900-11.1.11.2 (2024);  
mounted in upright position

## STREAMLIGHT'S ENGRAVING PROCESS

### Personalize Your Lights

Make your Streamlight flashlights a little more personal! We offer custom engraving for our products. Whether it's a for a safety award, to celebrate a corporate event, show appreciation to an employee or just display your logo, we can personalize your flashlights to suit your needs. Here are a few engraving suggestions:

- Annual Safety Award
- Employee Appreciation
- Website
- Company Logo
- Department
- Address
- Corporate Event
- Departmental Patch
- Phone number



### Streamlight's Imprinting Department

If you have artwork ready to go, our Imprinting Department will work with you to fit the design to your flashlight of choice. We can also customize an imprint for you with one of the following fonts:

**Amerigo Bold**      **Futura Lite**  
**Brush Script Regular**      **Swiss 721 Roman**




### FAQs

- Which Streamlight flashlights can be engraved?
- Most of Streamlight's aluminum flashlights can be laser engraved.
- How large will the engraved image be?
- It depends upon the dimensions of the engravable area of each light (noted on imprint guides).
- Where on the flashlight will the engraving appear?
- The location of the engraving depends upon which light is being personalized.
- How long will it take to get my order?
- Please allow up to an additional 1-2 week lead time for most orders. For larger orders call for a lead time estimate.
- What file format do you require for supplied artwork?
- Supplied artwork format must be a black and white bitmap (.bmp) file.

### How to Order

To have your product engraved, note "Custom Imprinting" on your order form and include your camera-ready artwork (.bmp file) or use one of our typefaces. A Customer Service Representative (CSR) will contact you and send an engraving order form for your approval and signature.

Engraving fees and minimum order requirements apply. Consult with your CSR to determine price and lead time.

		30 EAGLEVILLE ROAD - EAGLEVILLE, PA 19403 PHONE: 610-631-0600 FAX: 610-631-0712	<i>Customer Approval</i>
Date: _____ Company: _____ Attention: _____ Sales Order #: _____ ISR: _____		• Approved fonts: (check one if artwork is unavailable) <input type="checkbox"/> <b>Amerigo Bold</b> <input type="checkbox"/> <b>Futura Lite</b> <input type="checkbox"/> <b>Brush Script Regular</b> <input type="checkbox"/> <b>Swiss 721 Roman</b>	
- ARTWORK FOR LOGOS SHOULD BE SUBMITTED AS EPS FILES OR: • ILLUSTRATOR FILES (NO JPEG), DXF, DWG AND IGES FOR HOT STAMP AND PAD PRINTING. • BMP AND JPEG FOR LASER ENGRAVING (PREFERRED). • BLACK AND WHITE CAMERA READY ARTWORK IS ALSO ACCEPTABLE. IF THE PROPER FILE FORMAT IS NOT SUPPLIED, EXTRA CHARGES MAY BE INCURRED. - ACTUAL SIZE OF IMPRINT MAY VARY, AS NECESSARY, FROM ARTWORK.			
***Your imprint order is QN_HOLD pending approval of this layout.*** <input type="checkbox"/> The undersigned acknowledges the exclusive right, title and interest in and to the proposed engraving word(s) and/or image free of any encumbrance or third party restriction and hereby authorizes and indemnifies the use of the same. Streamlight, Inc. reserves the right to cancel this request at any time if it determines said authority not valid for any reason.			
Approved By: _____		Date: _____	
<h3>IMPRINT GUIDE - STYLUS PRO</h3> <p>- IMPRINT BY LASER ENGRAVING ONLY.</p>  <p>REQUESTED IMPRINT          ORIENT AS SHOWN (SEE NOTE)          (2.0"x.25" Approx.)</p> 			



### Contact Information

Contact us today for more information!

Phone: (800) 523-7488 / +1 (610) 631-0600

Fax: (800) 220-7007 / +1 (610) 631-0712

cs@streamlight.com



Streamlight, Inc.  
30 Eagleville Road  
Eagleville, PA U.S.A. 19403-3996

[streamlight.com](http://streamlight.com) // [streamlightgear.com](http://streamlightgear.com)  
(800) 523-7488 Toll-Free  
(800) 220-7007 Fax  
(610) 631-0600  
(610) 631-0712 Fax

