

ProTac® 2AAA HIGH PERFORMANCE FLASHLIGHT

MARKET
APPLICATIONS: Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

DESCRIPTION: Compact & powerful, this ProTac® 2AAA series flashlight offers three different user selectable programs and the latest in power LED technology. The combination of small size and output from the C4® LED result in one of the brightest tactical personal carry lights for its' size. Packaged with a removable pocket clip and holster.

CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS: Length: 5.62 in. (14.27 cm)
Head Diameter: 0.72 in. (1.83 cm)
Barrel Diameter: 0.50 in. (1.27 cm)

WEIGHT: 2.0 oz (57 grams) with alkaline batteries. (Batteries included with purchase)

LENS: Glass lens, o-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: High - 130 Lumens, 1230 candela peak beam intensity, and 70 meter beam distance.
Low - 20 Lumens, 230 candela peak beam intensity, and 30 meter beam distance.
Optimized electronics provides regulated intensity.


ON/OFF: Multi-function, push-button tactical tail switch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.





RUN TIME: See chart. All claims are to 10% of initial lumen output.

BATTERY: Two (2) AAA alkaline batteries.


FEATURES: C4® LED technology for extreme brightness.
LED Solid State Power Regulation provides maximum light output throughout battery life.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
1 meter impact resistance tested.
TEN-TAP® programmable switch allows user to select one of three different programs.
Anti-roll face cap.
Removable pocket clip.
Serialized for positive identification.

WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS: Meets applicable European Community directives. 
OPTIONAL ACCESSORIES: Holster.

	FL1 STANDARD	HIGH	LOW
OUTPUT		130 LUMENS	20 LUMENS
RUNTIME		1h 45min	13h
DISTANCE		70m	30m
INTENSITY		1230cd	230cd

Strobe Runtime: 3.5 hours

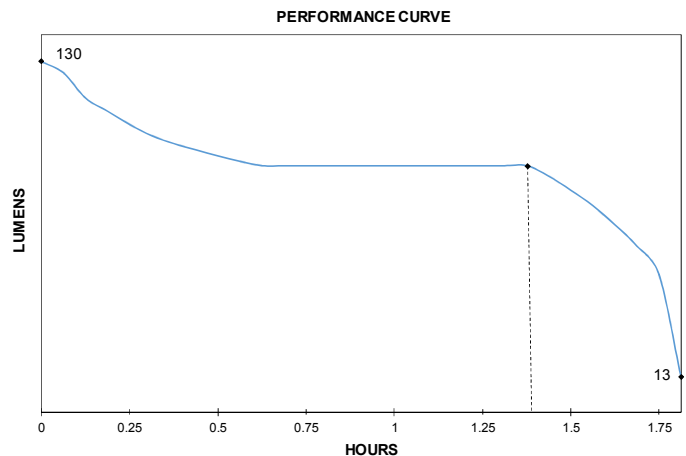

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 1/11/2012

Revised: 12/15/2016

Rev: 2

Made In China

Document #207