

POLYTAC® X USB // POLYTAC® X
MULTI-FUEL, HANDHELD TACTICAL FLASHLIGHT

- DESCRIPTION:** The PolyTac® X USB and PolyTac® X are multi-fuel tactical flashlights that can use either one Streamlight SL-B26® protected Li-Ion USB rechargeable battery pack or two CR123A disposable batteries. The PolyTac® X USB is a complete rechargeable system that comes packaged with a charge cord and an SL-B26® battery pack that features an integrated USB-C charge port. The PolyTac® X comes packaged with two CR123A batteries. Both versions feature a rocky stipple grip texture, a two-way pocket clip, and a TEN-TAP® programmable tail switch.
- CASE MATERIAL:** High-impact, super tough nylon polymer for exceptional durability and a sure grip. All openings O-ring or gasket-sealed. Available in black, yellow, or coyote.
- DIMENSIONS:** Length: 5.46 in (13.9 cm) Body Diameter: 1.00 in (2.54 cm)
 Head Diameter: 1.25 in (3.18 cm) Major Diameter: 1.35 in (3.43 cm)
- WEIGHT:** PolyTac® X USB: 4.9 oz (139 g) with one (1) SL-B26® protected Li-Ion USB rechargeable battery pack.
 PolyTac® X: 4.4 oz (125 g) with two (2) CR123A batteries.
- LENS:** Glass lens, O-ring sealed.
- LIGHT SOURCE:** White LED, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See chart. Regulated output for consistent lumen performance over entire battery life.
- RUN TIME:** See charts for specific battery type. All claims to 10% of initial lumen output.
- ON/OFF:** Multi-function, push-button tactical tail switch. One-handed operation of momentary, variable intensity, or strobe mode. TEN-TAP® programmable switch allows for user selection of one of three different programs: high/strobe/low (factory default), high only, or low/medium/high.
- BATTERY:** One (1) Streamlight SL-B26® protected Li-Ion USB rechargeable battery pack with on-board safety control, 2600mAh, rechargeable up to 500 times. Recharges in 5 hours.
 Two (2) 3-volt CR123A lithium batteries with a storage life of 10 years.
WARNING - EXPLOSION RISK, BURN AND FIRE HAZARD. Do not use SL-B9® or SL-B34® batteries in firefighting apparatus or fire situations. Do not expose SL-B9® or SL-B34® to temperatures greater than 140F (60C).

FEATURES:



- High-power LED for extreme brightness.
- Multi-fuel; accepts a Streamlight SL-B26® battery pack or CR123A batteries.
- IPX7-rated design; waterproof to 1 meter for 30 minutes.
- 3-meter impact resistance tested.
- Superior grip texture for sure grip.
- TEN-TAP® programmable switch allows for user selection of one of three different programs.
- Removable two-way pocket clip.
- Serialized for positive identification.

APPROVALS:  Meets applicable United Kingdom and European Community Directives.

NFPA Flashlight meets 500° F requirements of NFPA 1970 - 14.2 (2025).


TAA Trade Agreement Act Compliant.

 CEC Compliant (USB model only).

WARRANTY: Streamlight's Limited Lifetime Warranty

ACCESSORIES: Holster, safety wands, colored flip lenses, charge cords

	CR123A Lithium Batteries				SL-B26® USB Battery Pack				
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW	
OUTPUT		600 LUMENS	260 LUMENS	35 LUMENS		600 LUMENS	260 LUMENS	35 LUMENS	
RUN TIME		2h 45min	5h 30m	34h		3h 30min	5h 45m	36h	
DISTANCE		205m	135m	50m		205m	135m	50m	
INTENSITY		11,485cd	4,930cd	675cd		11,485cd	4,930cd	675cd	
		Strobe Run Time: 5h 30m				Strobe Run Time: 8h			

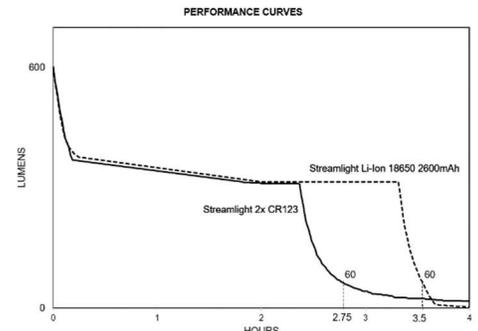

All performance claims tested to ANSI/PLATO FL1-2019 Standard