

## VANTAGE® II HELMET-MOUNTED LIGHT

**DESCRIPTION:** Lightweight, compact, and low-profile, the Vantage® II is available in four versions, designed to easily attach above or below full brim fire helmets, slotted industrial hard hats, Gallet helmets, or MSA Cairns® 1010/1044 traditional fire helmets. The light features the latest in power LED technology combined with an ultra-bright blue safety taillight LED. It is powered by a single CR123A disposable lithium battery and sealed for waterproofness.

**CASE MATERIAL:** 6000 series machined aircraft aluminum with black anodized finish.

**DIMENSIONS:** Length: 2.37 in (6.02 cm) Width: 1.16 in (2.95 cm)  
Height: Fire Mount - 2.18 in (5.54 cm), Industrial - 1.54 in (3.91cm), Gallet - 1.37 in (3.48 cm)  
MSA Cairns® 1010/1044 Helmet Mount - 2.15 in (5.46 cm)

**WEIGHT:** Fire Mount - 3.65 oz (103.5 g); Industrial - 2.97 oz (84.2 g); Gallet - 2.90 oz (82.2 g)  
MSA Cairns® 1010/1044 Helmet Mount - 2.90 oz (82.2 g) with battery (included in purchase)

**LENS:** High-temperature, shock-mounted, impact-resistant BOROFLOAT® glass

**LIGHT SOURCE:** High-power LED, impervious to shock with a 50,000-hour lifetime  
470 nm ultra-bright blue LED safety taillight with a 100,000-hour lifetime

**LIGHT OUTPUT:** 350 lumens, 3500 candela peak beam intensity, 118m beam distance and measured system output. The TIR optic produces a smooth beam hotspot with optimum peripheral illumination to aid in navigation. Optimized electronics provide regulated intensity.



**ON/OFF:** Large easy access on/off switch located on rear of light

**RUN TIME:** 2.25 hours continuous to 10% of initial lumen output


**BATTERY:** One (1) 3-volt CR123A lithium battery with a storage life of 10 years  
**WARNING - EXPLOSION RISK, BURN AND FIRE HAZARD.** Do not use SL-B9 batteries in firefighting apparatus or fire situations. Do not expose SL-B9 battery to temperatures greater than 140F (60C).

**FEATURES:**








High-power LED for extreme brightness  
IPX7-rated design; waterproof to 1 meter for 30 minutes  
Ultra-bright blue LED safety taillight visible in heavy smoke  
Taillight can be configured to flash for industrial and fire applications  
Serialized for positive identification  
LED Solid State Power Regulation provides maximum light output throughout battery life  
1-meter impact resistance tested

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**APPROVALS:**  Meets applicable United Kingdom and European Community Directives  
**NFPA** Flashlight meets 500°F requirements of NFPA 1970 - 14.2 (2025).  
Meets NFPA 1851 guidance on accessories with MSA Cairns® 1010/1044 traditional fire helmets.

**ACCESSORIES:** MSA Cairns® 1010/1044 Helmet Mounting Bracket

FL1 STANDARD	HIGH	LOW
	350 LUMENS	135 LUMENS
	2h 15m	5h
	118m	80m
	3,500cd	1,700cd

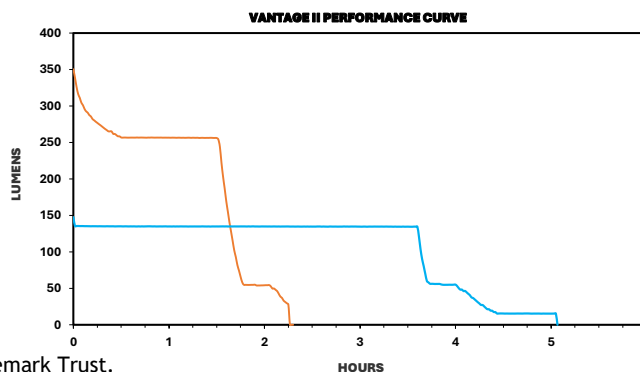

All rights reserved. Cairns® is a registered trademark of the Cairns Trademark Trust.  
BOROFLOAT® is a registered trademark of SCHOTT AG.  
All performance claims tested to ANSI/PLATO FL1-2019 Standard