

STINGER® 2020 RECHARGEABLE LED FLASHLIGHT

- DESCRIPTION:** Compact and extremely powerful, the Stinger® 2020 features 2,000 lumens, an intensity mode selector switch (for high, medium, and low), and a textured body for enhanced grip. In addition, it features a body-mounted on/off switch with battery status indicator and a second independent tactical tail switch. It is powered by two SL-B26® Li-Ion USB rechargeable battery packs, which can be charged inside or outside of the flashlight.
- CASE MATERIAL:** Premium quality aluminum alloy body and non-slip rubberized comfort side panels. Available in Black, Red, or Blue.
- DIMENSIONS:** Length: 7.67 in (19.48 cm) Major Diameter: 1.62 in (4.11 cm)
- WEIGHT:** 12.3 oz (350g) with batteries
- LENS:** High temperature, shock-mounted, impact-resistant BOROFLOAT® glass; gasket-sealed.
- LIGHT SOURCE:** High-power white LED, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See chart. Optimized electronics provide regulated intensity. Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.
- ON/OFF/INTENSITY:** Momentary or constant on operation. Body-mounted, push-button on/off switch designed for extremely long life, tested at 1 million actuations, and a second push-button tactical tail switch. Both switches offer control independent of one another. Body-mounted, three-position slide switch to allow for selection of high, medium, or low intensity modes. Double tap either switch to activate strobe mode.
- RUN TIME:** See chart. All claims to 10% of initial lumen output. Strobe: 3.25 continuous hours.
- BATTERY:** Two (2) Streamlight SL-B26® protected Li-Ion USB rechargeable battery packs with on-board safety control circuit, 2,600mAh, rechargeable up to 500 times.
- CHARGE HOLDERS:** Fits existing Stinger® chargers. Smart charger fully recharges within 8 hours (5V/1A USB input) or 6 hours (12VDC input).
- CHARGE CORDS:** Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs. 12VDC cigarette lighter or direct wire automotive cords. Streamlight USB cord.

FEATURES:

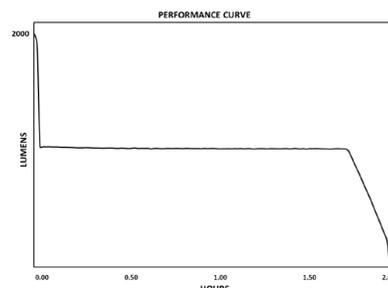

- High-power LED for extreme brightness. Ergonomic anti-roll body design with textured grip. Intensity selector switch indicates mode at a glance. Multiple charging options. IPX7-rated; waterproof operation to 1 meter submersion. *Not a dive light or for underwater use.* 2-meter impact resistance tested. Serialized for positive identification. LED charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.

WARRANTY: Streamlight's Limited Lifetime Warranty

APPROVALS:  Meets applicable United Kingdom and European Community Directives
 CEC Compliant
TAA Trade Agreement Act-Compliant

OPTIONAL ACCESSORIES: Color face cap rings, safety wands, holster, color filters, 5-unit bank charger, Smart charger, AC/USB wall adapters, USB cord

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		2,000 LUMENS	850 LUMENS	100 LUMENS
RUN TIME		2h	4h	24h
DISTANCE		315m	200m	70m
INTENSITY		25,000cd	10,000cd	1,200cd



All performance claims to ANSI/PLATO FL1-2019 Standard
 All rights reserved. BOROFLOAT® is a registered trademark of SCHOTT AG.

Issued: 04/28/2020

Revised: 08/14/2024 Rev: 3

Assembled in the USA.

Document #355