

## STINGER® COLOR-RITE®

**DESCRIPTION:** Compact and powerful, the Stinger® Color-Rite® rechargeable flashlight features high CRI Color-Rite Technology® for true color recognition and offers three microprocessor-controlled intensity modes and strobe mode. The combination of rechargeable battery and power LED result in one of the lowest operating costs of any flashlight made.

**CASE MATERIAL:** 6000 series machined aircraft aluminum with non-slip rubberized comfort grip and anti-roll rubber ring

**DIMENSIONS:** Length: 8.41 in (21.36 cm) Major Diameter: 1.62 in (4.11 cm) Body Diameter: 1.17 in (2.97 cm)

**WEIGHT:** 12.4 oz (352 g) \*

**LENS:** Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

**LIGHT SOURCE:** High-power LED, warm white, 3,000 K, 90 CRI, impervious to shock with a 50,000-hour lifetime

**LIGHT OUTPUT:** See chart. Optimized electronics provides regulated intensity.  
Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.



**ON/OFF:** Multi-function, easy access, head-mounted push-button switch designed for extremely long life; tested at 1 million actuations

**RUN TIME:**  See chart. Strobe: 3 continuous hours

**BATTERY:** 3-cell, 3.6-volt, 2.6Ahr Ni-MH sub-C battery, rechargeable up to 1000 times

**CHARGE HOLDERS:** Fits existing Stinger® chargers  
Smart charger: Fully recharges within 4.5 hours (5V/1A USB input) or 3 hours (12VDC input)  
Smart PB charger: Fully recharges within 7.5 hours (5V/1A USB input) or 4 hours (12VDC input)

**CHARGE CORDS:** Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs.  
12VDC cigarette lighter or direct wire automotive cords.

**FEATURES:**  
 90 CRI LED for true color recognition  
 IPX4-rated for water-resistant operation  
1-meter impact resistance tested  
Serialized for positive identification  
LED charge-continuity indicator on charger base  
Compact, snap-in charger mounts in any position


**WARRANTY:** Streamlight's Limited Lifetime Warranty

**APPROVALS:**   Meets applicable United Kingdom and European Community Directives

 CEC Compliant (Smart charger models only)

**OPTIONAL ACCESSORIES:** DS tail cap switch, safety wands, ring holder, holster, color filters, 2.6Ahr Li-Ion battery, 5-unit bank charger, Smart charger, Smart PiggyBack® charger that allows for simultaneous charging of light and battery

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		<b>500</b> LUMENS	<b>275</b> LUMENS	<b>140</b> LUMENS
RUN TIME		<b>1h 30min</b>	<b>2h 30min</b>	<b>5h</b>
DISTANCE		<b>265m</b>	<b>190m</b>	<b>134m</b>
INTENSITY		<b>17,500cd</b>	<b>9,000cd</b>	<b>4,500cd</b>

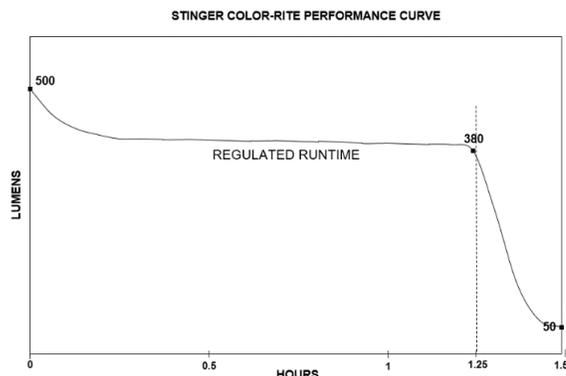

\* With battery (included in purchase)

All performance claims to ANSI/PLATO FL1-2019 Standard

Issued: 08/12/2022

Revised: 09/09/2022

Rev: 1

Engineered in the USA, Made in China.

Document #390