

## STINGER® 2020 S RECHARGEABLE LED FLASHLIGHT



- DESCRIPTION:** Compact and extremely powerful, the Stinger® 2020 S features 2,000 lumens with an intensity mode selector switch for high, medium, and low. It also features a textured body for enhanced grip and a body-mounted on/off switch with a battery status indicator. It is powered by a Stinger 2020 S Li-Ion rechargeable battery pack, which can be charged inside the light or via PiggyBack® charger.
- CASE MATERIAL:** Premium quality aluminum alloy body and non-slip rubberized comfort side panels.
- DIMENSIONS:** Length: 7.69 in (19.53 cm) Major Diameter: 1.62 in (4.11 cm)
- WEIGHT:** 12.2 oz (346 g) with battery pack.
- LENS:** High temperature, shock-mounted, impact-resistant BOROFLOAT® glass; gasket-sealed.
- LIGHT SOURCE:** High-power white LED, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See chart. Optimized electronics provide regulated intensity. Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.
- ON/OFF/INTENSITY:** Momentary or constant on operation. Body-mounted, push-button on/off switch designed for extremely long life, tested at 1 million actuations. Three-position slide switch to allow for selection of high, medium, or low intensity modes. Double tap on/off switch to activate strobe mode.
- RUN TIME:** See chart. All claims to 10% of initial lumen output. Strobe: 3.25 continuous hours.
- BATTERY:** (1) Stinger 2020 S protected Li-Ion rechargeable battery pack with on-board safety control circuit, 6,800mAh, rechargeable up to 500 times.
- CHARGE HOLDERS:** Fits existing Stinger® chargers. Smart charger fully recharges within 8 hours (12VDC input). Available PiggyBack charger provides power to a second battery pack simultaneously.

**FEATURES:**



- High-power LED for extreme brightness. Intensity selector switch indicates mode at a glance.
- Ergonomic anti-roll body design with textured grip.
- Multiple charging options.
- IPX7-rated; waterproof operation to 1 meter submersion. *Not a dive light or for underwater use.*
- 2-meter impact resistance tested.
- Serialized for positive identification.
- LED charge-continuity indicator on charger base.
- Snap-in, PiggyBack charger mounts in any position.

**APPROVALS:**





-  Meets applicable United Kingdom and European Community Directives
-  CEC Compliant
- TAA** Trade Agreement Act-Compliant


**WARRANTY:**

Streamlight's Limited Lifetime Warranty

**OPTIONAL ACCESSORIES:**

Safety wands, holster, color filters, 5-unit bank charger, smart charger, AC adapters

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		2,000 LUMENS	850 LUMENS	100 LUMENS
RUN TIME		2h	4h	24h
DISTANCE		315m	200m	70m
INTENSITY		25,000cd	10,000cd	1,200cd

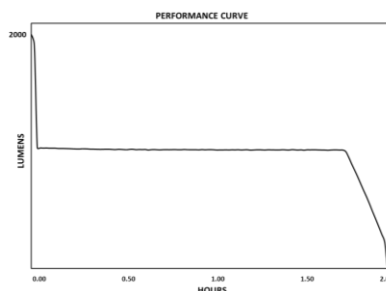

All performance claims tested to ANSI/PLATO FL1-2019 Standard  
All rights reserved. BOROFLOAT® is a registered trademark of SCHOTT AG.