

LITEBOX® 1MILLION®

DESCRIPTION: The LiteBox® 1Million® is a rugged, rechargeable, and fully portable high-intensity search and scene light built for demanding professional use. Delivering 1.25 million candela, it projects a powerful, focused beam capable of illuminating objects 1.39 miles away, while also providing broad peripheral illumination for enhanced area visibility. Its articulating head enables precise light placement on elevated or hard-to-reach targets-such as power lines and high-rise structures-improving situational awareness in complex environments. Designed for portability and extended operation, the LiteBox® 1Million® features a heavy-duty shoulder strap and integrated, durable D-rings that ensure secure, comfortable handling during prolonged tasks. This combination of power, reach, and mobility make LiteBox® 1Million® a reliable lighting solution for storm response, search, rescue, and scene illumination.

CASE MATERIAL: High-impact ABS thermoplastic housing, lens ring, and grip handle.

DIMENSIONS: Length: 12.5 in (31.75 cm) Body Width: 5.0 in (12.7 cm) Overall Height: 6.8 in (17.27 cm)
Head Diameter: 6.4 in (16.26 cm)

WEIGHT: 7.0 lbs. (3.18 kg) with battery

LENS: Unbreakable polycarbonate lens with scratch resistant coating.

LIGHT SOURCE: Three (3) white high-power LEDs impervious to shock with a 50,000-hour lifetime.

LIGHT OUTPUT: See chart. Optimized electronics provide regulated intensity, deep-dish multi-parabolic reflector produces a long-range, high-intensity beam with optimum peripheral illumination for scene lighting.

ON/OFF: Push-button. Press and hold to cycle through high-low lighting modes.

RUN TIME: See chart.

BATTERY: Two (2) 7.2V, 6.8Ahr Li-Ion battery packs rechargeable up to 500 times; available with 120/230/240VAC systems. Fully charges in 9 hours with provided power supplies. Charge indicator turns red when charging, turns green when fully charged.

BATTERY STATUS

INDICATOR: The translucent switch boot contains an integrated red/green battery status indicator.

- Solid green for 5 seconds: Light is charged and ready for use
- Solid red: 45 minutes or less of battery life remaining
- Flashing red: 15 minutes or less of battery life remaining

FEATURES: 1,250,000 peak beam candlepower for long-range applications.



Articulating light head pivots 135° & rotates 270°.

Intuitive integrated battery status indicator.

IPX4 - water-resistant design.

Fits existing Streamlight LiteBox® chargers.

Serialized for positive identification.

APPROVALS:

NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position.



Meets applicable United Kingdom and European Community Directives.







CEC Compliant.

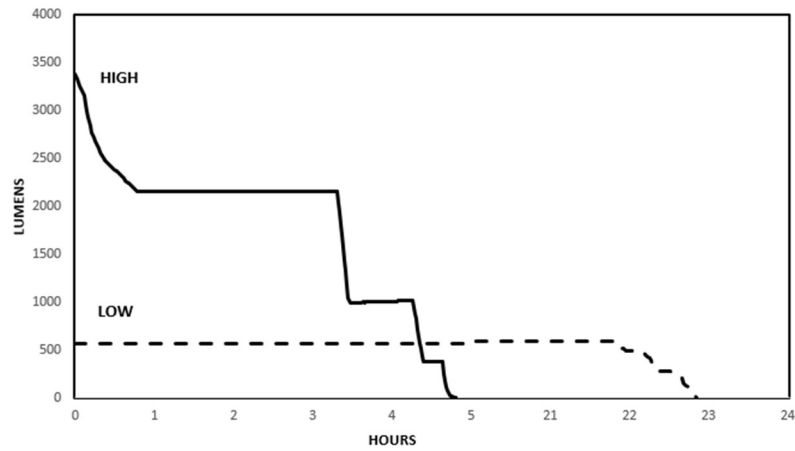


TAA Compliant

WARRANTY: Streamlight's Limited Lifetime Warranty.

ACCESSORIES: Locking charge rack; quick release shoulder strap; heavy-duty shoulder strap.
100V, 230V, or 240V AC and 12V DC charge cord.

FL 1 STANDARD	HIGH	LOW
	3,300 LUMENS	525 LUMENS
	4.5h	22.5h
	2,236m	894m
	1,250,000 cd	200,000 cd

PERFORMANCE CURVE

BEAM PATTERN
