

PORTABLE SCENE LIGHT II RECHARGEABLE HIGH LUMEN SCENE LIGHT



Portable Scene Light II - 120V AC/DC	#46000
Portable Scene Light II - 230V AC/DC	#46001
Portable Scene Light II - 240V AC/DC	#46002
Portable Scene Light II - 100V AC/DC	#46003
Portable Scene Light II - 240V (AUS/NZ) AC/12V DC	#46004

- Produces a high lumen flood pattern
- Five intensity levels correspond to desired run time

	100%	80%	60%	40%	20%
LUMENS:	10,000	8,300	6,300	4,500	2,300
RUN TIME:	2h	2.75h	3.75h	5.75h	11h

- Multi-level illumination for scene lighting; head swivels 360° to aim the beam where you need it
 - Stackable for “light tower” capability
- Lithium ion batteries charge in 6 hours
 - Batteries will continue to charge while in use when plugged in; runs indefinitely using AC or DC power cord
- Waterproof to 1m for 30 minutes
- High-impact, thermoplastic housing mounted in a virtually indestructible alloy steel frame
- Compact size (16x11x12 in; 40.6x28.9x30.5 cm); 15.38 lbs. (6.1 kg)



VULCAN® 180 HAZ-LO® // VULCAN® 180 MULTI-FUNCTION PORTABLE SCENE LIGHT




SYSTEM	HAZ-LO DIV 1 ORANGE	HAZ-LO DIV 1 YELLOW	DIV 2 ORANGE	DIV 2 YELLOW
Vulcan 180 Standard System - 230V AC/12V DC	44332	44322	44312	44302
Vulcan 180 Standard System - 240V (UK) AC/12V DC	---	---	44313	44303
Vulcan 180 Standard System - 240V (AUS/NZ) AC/12V DC	---	---	44314	44304
Vulcan 180 Standard System - 120V/100V AC/12V DC	44331	44321	44311	44307
Vulcan 180 Vehicle Mount System - 12V DC	44335	44325	44315	44305
Vulcan 180 without charger	44330	44320	44310	44300



- **HAZ-LO® intrinsically safe model: // NEW**
 - High and low modes:
 - » High: 400 lumens; 316m beam; runs 10 hours
 - » Low: 130 lumens; 128m beam; runs 24 hours
 - Class I, Division 1 Groups A,B,C,D,E,F,G; ClassI Zone 0, Groups IIC, Class III; T-Code: T4
 - Meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position
- **DIV 2 model:**
 - High and low modes:
 - » High: 1,200 lumens; 548m beam; runs 5.75 hours
 - » Low: 350 lumens; 296m beam; runs 16 hours
 - Class I, Division 2, Groups A, B, C, D; Class II, Division 2, Groups F, G; Class III; Temperature Class T4
 - Meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position
- Features a 180° articulating head that aims the beam where you need it; head locks in place in forward facing position Three LEDs produce a tight beam with optimum peripheral illumination; ultra-bright blue taillight LEDs make certain you can be seen even in thick smoke
- Rechargeable lithium ion battery
- High impact, super-tough nylon construction; articulating head constructed from high grade aluminum encased in super-tough nylon; reinforced D-Rings
- Rubberized cushioned-grip handle designed for easy hand off; flat base area allows light to stand on its own for scene lighting
- IPX7 rated - waterproof to 1m submersion
- 7.43 in. (18.8 cm); 2.47 lbs. (1123g)

PORTABLE SCENE LIGHT PORTABLE, RECHARGEABLE SCENE LIGHT

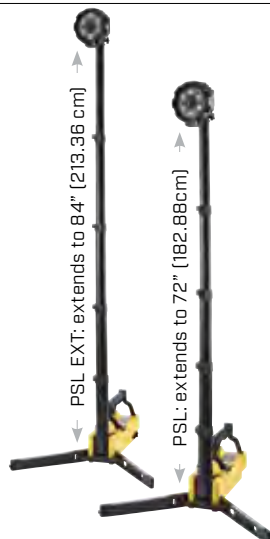

PORTABLE SCENE LIGHT CONFIGURATION	PSL	PSL EXT
Portable Scene Light with 120V AC/12V DC and shoulder strap	#45670	#45680
Portable Scene Light with 230V AC/12V DC and shoulder strap	#45671	#45681
Portable Scene Light with 240V AC/12V DC and shoulder strap	#45672	#45682
Portable Scene Light with 100V AC/12V DC and shoulder strap	#45673	#45683
Portable Scene Light with 240V (AUS/NZ) AC/12V DC and shoulder strap	#45674	#45684

- Produces a uniform flood pattern; selectable diffuser settings for two beam widths; three user-selectable outputs:
 - High for a super-bright flood beam: 5,300 lumens; 410m beam; runs 4 hours
 - Medium for an intense beam and longer run time: 2,500 lumens; 292m beam; runs 9 hours
 - Low for when a less intense beam is ideal and for longer run times: 1,300 lumens; 215m beam; runs 18 hours
- Optimum peripheral illumination for scene lighting; head swivels 90° to aim the beam where you need it for task lighting
- Sealed lead acid batteries rechargeable up to 500 times
 - Batteries will continue to charge while operating from dedicated power source; runs indefinitely using AC or DC power cord
- Balanced design and easy setup; less than 30 seconds for full deployment; pole extends to 72"
- IP67 rated; dust-tight and waterproof to 1m for 30 minutes
- Designed to resist 40mph wind continuous in all directions with head fully extended
- Portable Scene Light: 25 lbs (11.3 kg) provides weight stabilization, but is light enough to carry; packs to a compact size (22"; 55.88 cm) for easy stowage
- Portable Scene Light Ext: 25.5 lbs (11.6 kg); Packs to a compact size (25.5"; 64.8 cm) for easy stowage

SURVIVOR® LOW PROFILE, RIGHT ANGLE FLASHLIGHT



120V/100V AC/12V DC - Div 1 - Orange	#90503
Alkaline Model - Orange	#90540

- High, low, moonlight and flash modes:
 - High: 175 lumens; 405m beam; runs 3.5 hours (rech); runs 4 hours (alkaline)
 - Low: 60 lumens; 237m beam; runs 13 hours (rech); runs 15 hours (alkaline)
 - Moonlight provides a low-level light when battery life is essential: runs for 20 days
 - Flash mode: runs for 8 hours
- Custom designed optic with optional, interchangeable Smoke-Cutter® plugs for preferred beam pattern:
 - ~ Black plug significantly reduces peripheral light for a tighter beam
 - ~ Amber plug reduces peripheral light and eye fatigue caused by glare
- Constructed of high impact, super-tough nylon; IPX4 water-resistant; 2m impact-resistance tested; low-profile bezel minimizes snag hazards
- Spring-loaded clip attaches to belts and harnesses; D-ring provides forward hanging orientation
- Uses rechargeable battery pack; also accepts four "AA" alkaline batteries
- Class I, II, Division 1, Groups C, D, E, F, G; Class III, T-Code: T4; Class I, Division 2, Groups A, B, C, D; T-Code: T4
- Charger meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in any position
- Flashlight meets 500°F requirements of NFPA 1971-8.6 (2013)

PROTAC® 90 ULTRA-COMPACT, RIGHT ANGLE TACTICAL LIGHT



ProTac 90 - Clam - Black	#88087
ProTac 90 - Box - Black	#88088

- Three output modes: High, low and strobe
- CR123A output
 - High: 300 lumens; 147m beam; runs 1.75 hours
 - Low: 40 lumens; 53m beam; runs 14 hours
 - Strobe: runs 2.5 hours
- AA alkaline/lithium output
 - High: 125 lumens; 93m beam; runs 2.75 hours (alk); 5.5 hours (lith)
 - Low: 40 lumens; 53m beam; runs 8.25 hours (alk); 15 hours (lith)
 - Strobe: runs 3.5 hours (alk); 8 hours (lith)
- Multi-Fuel: One CR123A lithium battery (included) or AA alkaline battery (included); also accepts AA lithium battery
- Durable anodized machined aircraft aluminum construction; pocket clip designed to attach to MOLLE, harnesses and other gear
- IPX7 waterproof to 1m for 30 minutes
- 3.78" (9.6 cm); 2.8 oz (79g) with CR123A battery; 3.1 oz. (88g) AA alkaline; 2.7 oz (77g) AA lithium

POLYTAC[®] 90 X USB // POLYTAC[®] 90 X RIGHT-ANGLE MULTI-FUNCTION FLASHLIGHT



SYSTEM	BLACK	YELLOW	ORANGE	ORANGE W/ GEAR KEEPER
PolyTac 90X with CR123A lithium batteries	88830	88831	88834	88832
PolyTac 90X USB - SL-B26 battery pack & USB cord	88835	88836	88838	88837

- **MULTI-FUEL** - uses one Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack; also accepts two CR123A lithium batteries
- High and low modes:
 - High for a super-bright spot beam: 500 lumens; 167m beam; runs 2.5 hours (CR123A); runs 3.75 hours (SL-B26 battery pack)
 - Low for a less intense beam and longer run time: 85 lumens; 64m beam; runs 12 hours (CR123A); runs 19 hours (SL-B26 battery pack)
- Multi-function push-button head switch easy to use with gloved hands
 - Features battery life indicator
- High-impact, “super-tough” nylon polymer construction
 - Integrated carabiner style D-ring for a variety of attachment methods
 - Multi-position pocket clip attaches to turnout gear, harnesses, etc.; offers a variety of mounting positions
- IPX7 waterproof to 1m for 30 minutes
- Gear Keeper option helps prevent loss; Tether features spectra nylon line with 36” extension; 6 oz. retraction force
- 4.43” (11.25 cm); 4.8 oz. (136g) with (SL-B26 battery pack); 4.3 oz. (122g) with CR123A lithium batteries



VANTAGE[®] 180 X USB // VANTAGE[®] 180 X HELMET/RIGHT-ANGLE MULTI-FUNCTION FLASHLIGHT



SYSTEM	ORANGE	BLACK
Vantage 180 X with CR123A lithium batteries	88901	88903
Vantage 180 X USB - SL-B26 battery pack & USB cord	88911	88913

- **MULTI-FUEL** - uses one Streamlight SL-B26™ protected Li-Ion USB rechargeable battery pack; also accepts two CR123A lithium batteries
- High and low modes:
 - High for a super-bright spot beam: 250 lumens; 170m beam; runs 4 hours (CR123A); runs 5 hours (SL-B26 battery pack)
 - Low for a less intense beam and longer run time: 100 lumens; 103m beam; runs 12 hours (CR123A); runs 15 hours (SL-B26 battery pack)
- Blue LED (helmet mount use) for visibility in heavy smoke; white LED for a downcast flood light to see what’s at your feet (right-angle light)
- Head articulates 180° to aim the beam
- Use as a helmet light; fits both traditional and modern style helmets; no tools necessary to quickly remove for use as a handheld flashlight
- Use as a right-angle light; forward facing spot light with downcast light
- High-impact, “super-tough” chemical-resistant nylon polymer construction; integrated stainless steel multi-function clip; turnout gear attachment hook; IPX7 waterproof to 1m for 30 minutes; 1m impact resistance tested
- 5.2” (13.20 cm); 5.5 oz. (156g)
- Meets requirements of NFPA 1971-8.6 (2013)



SL-B26™ PROTECTED LITHIUM ION BATTERY PACK & BANK CHARGER

ITEM	SINGLE BATTERY	2-PACK
SL-B26 battery pack	#22101	#22102

BATTERY FEATURES:

- Protected lithium ion battery with on-board safety control circuit
- USB rechargeable; also charges in charger holder
- Charges in 5 hours using USB cord
- 2.75 in (7.0 cm); 1.7 oz (48 grams)



ITEM	W/O BATTERIES	W BATTERIES
8-Unit Bank Charger - 120V/100V AC	#20221	#20224
8-Unit Bank Charger - 230V/240V AC	#20222	#20225
8-Unit Bank Charger - 12V DC	#20220	#20223

8-UNIT CHARGER FEATURES:

- Organize, store and charge up to eight lithium ion USB rechargeable battery packs; charge time: 5.25 hours
- Charge bays securely hold batteries in place - ideal for truck mounting
- Charge indicators over each battery slot: red = charging, green = charged
- Low-profile - 1” (2.54 cm) - minimal mounting area required
- Impact-resistant polymer construction
- 10.45” x 4.74” x 1” (26.54x12.06x2.54 cm); 7.6 oz. (216g) w/o batteries; 20.88 oz. (592g) w/ batteries
- Meets requirements of NFPA 1901-14.1.10.2 (2016) mounted in upright position



MACROSTREAM® USB ULTRA-COMPACT USB RECHARGEABLE PERSONAL LIGHT



MacroStream USB with USB cord and lanyard - Black..... #66320

- High and low modes:
 - High: 500 lumens; 90m beam; runs 2 hours
 - Low: 50 lumens; 30m beam; runs 8 hours
- Lithium ion battery charges in-product in 4 hours
- Multi-function push-button tail switch with charge indicator
- Durable, anodized machined aluminum construction; scratch-resistant polycarbonate lens
- Removable pocket clip also clips onto brim of hat for hands free use
- IPX4 water-resistant
- Compact design fits in the palm of your hand, comfortably fits in your pocket
- 4.5" (114.3mm); 2.2 oz (62.4g)

VANTAGE® II ULTRA-COMPACT HELMET MOUNTED LIGHT



Vantage II - Fire helmet mount and with lithium battery – Box..... #69331

Vantage II - Gallet helmet mount and with lithium battery – Box..... #69332

Vantage II - Industrial hard hat mount and with lithium battery – Box..... #69333

- High and low modes:
 - High: 350 lumens; 118m beam; runs 2.25 hours
 - Low: 135 lumens; 80m beam; runs 5 hours
- Bright blue taillight LED ensures you can be seen even from behind
- Durable, anodized aluminum construction; IPX7 waterproof to 1m for 30 minutes
- Includes one CR123A lithium battery, integrated mount and hex key
- 2.37" (6.01 cm); 3.65 oz. (103.5g)
- Meets requirements of NFPA 1971-8.6 (2013)

SIEGE® X USB ULTRA-COMPACT PROTECTED LITHIUM ION POWERED HAND LANTERN



Siege X USB..... #44956

- 2-in-1 rechargeable lantern/flashlight combo with multiple modes:
 - White Light (Lantern):
 - » High for brightest light: 325 lumens; runs 4.5 hours
 - » Medium for bright light and longer run time: 170 lumens; runs 7.75 hours
 - » Low for extended run time: 30 lumens; runs 25 hours
 - Flashlight mode:
 - » High: 300 lumens; runs 3.5 hours
 - » Low: 40 lumens; runs 25 hours
 - Red Light (Lantern):
 - » High: 1.6 lumens; runs 22 hours
 - » Flash SOS mode for emergency signaling: 1.6 lumens; runs 90 hours
- **MULTI-FUEL** - Uses Streamlight SL-B26 protected Li-Ion rechargeable battery pack (included); also accepts two CR123A lithium batteries
- Multi-function power switch with battery level indicator
- Durable, polymer construction with rubber molded base that provides stability on slippery or uneven surfaces; stand it upright or hang it with D-ring
- IPX7 waterproof to 1m submersion
- 4.35" (11.05 cm); 7.2 oz. (204.12g)

SIEGE® AA ULTRA-COMPACT, ALKALINE WORK LANTERN



Siege AA - Red..... #44953

- A rugged, compact lantern for when you need a lot of light without taking up a lot of space
- Multiple modes:
 - White LED:
 - » High for brightest light: 200 lumens; runs 7 hours
 - » Medium for longer run time: 100 lumens; runs 15.5 hours
 - » Low for extended run time: 50 lumens; runs 37 hours
 - Red LEDs:
 - » High (night vision preserving mode): 0.7 lumens; runs 8 days
 - » Flash SOS mode for emergency signaling: 0.7 lumens; runs 12 days
- Uses three "AA" alkaline batteries (sold separately)
- Durable, polymer construction with rubber molded base provides stability on slippery or uneven surfaces
- IPX7 waterproof to 1m submersion; it floats
- 5.44" (13.82 cm); 8.8 oz (249.47 g)
- For every red Siege AA sold, Streamlight will donate \$2 to the National Fallen Firefighters Foundation®