

SURVIVOR® X USB

BUDGET-FRIENDLY RIGHT-ANGLE FLASHLIGHT




Strong spring-loaded clip securely grabs onto belts and gear; D-ring provides forward hanging orientation



Battery life indicator in switch:
 — Green indicates full charge
 — Turns red when battery is nearing low voltage
 — Flashes red continuously when 15 minutes left of battery life

- Material/Lens** Housing, base and battery housing made from high impact super tough nylon offering exceptional durability. All openings are O-ring sealed for IP67 waterproofing. Spring-loaded clip with built in D-ring easily attaches to belts and harnesses and reduces unwanted rotation. One way valve for case venting.
- Dims/Weight** Height: 7.06 in.; Height in charger: 8.67; Width: 2.85 in.; Diameter: 2.32 in.; Grip area: Height:3.60 in.; Thickness: 1.35 in.; Width: 2.20 in. Weight: 337g (with SL-B26); 363g (with AA Alkaline)
- Light Source** White LED impervious to shock with a 50,000 hour lifetime
 Custom "Total Internal Reflection" optic for narrow beam and optimum peripheral illumination. Optional insertable black plug reduces peripheral illumination for improved smoke cutting ability or amber plug reduces eye fatigue.
- Output/Run time** Three lighting modes:
 • High for a super-bright, smoke piercing beam: 250 lumens; 447m beam distance; 50,000 candela; runs 3.75 hours (Li-Ion); runs 5 hours (alkaline)
 • Low for longer run time: 60 lumens; 237m beam distance; 14,000 candela; runs 15 hours (Li-Ion); runs 15 hours (alkaline)
 • Flash for signaling: runs 8 hours continuous
- Switch** Push button switch designed for extremely long life.
 Rubber dome push button actuator provides easy operation even when wearing heavy gloves.
- INDICATOR:**
 Solid green for 5 seconds: Battery is ready for use.
 Solid red: 45 minutes of battery life remaining.
 Flashing red: 15 minutes of battery life remaining.
- Battery/Charging** The translucent switch boot contains an integrated red/green battery status indicator.
 Charger indicator turns red when charging, turns green when fully charged.
 One (1) optional Streamlight SL-B26® protected Li-Ion USB-rechargeable battery pack also accepts optional three (3) "AA" alkaline batteries.
- Features**
- Reduced bezel length to minimize snag hazards
 - D-ring provides forward hanging orientation
 - Updated battery door design for improved operation and seal.
 - IP67 rated; dust-tight and waterproof to 1m for 30 minutes; 2m impact resistance tested
 - Strong Spring-loaded clip grabs onto belts and gear
- Approvals** Class I & II, Division 2, Groups A,B,C,D,F,G; Class III, T-Code: T4
 Flashlight meets 500°F requirements of NFPA 1971-8.6 (2013)
- Warranty** Streamlight warrants this product to be free of defects for a lifetime of use except for batteries and bulbs, abuse and normal wear. We will repair, replace or refund the purchase price of this product should we determine it to be defective. This limited lifetime warranty also excludes rechargeable batteries, chargers, switches and electronics which have a 2 year warranty with proof of purchase. THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW. You may have other specific legal rights which vary by jurisdiction. Visit streamlight.com for full warranty information.

Description	UPC	ITEM#
Survivor X USB - Yellow	080926-90244-2	90244
Survivor X USB - Orange	080926-90044-8	90044

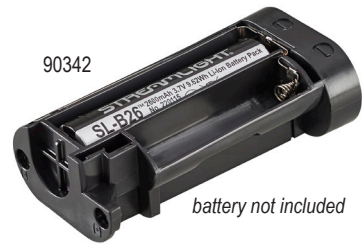

Description	UPC	Item #
Charger Kit with USB Cord	080926-22010-2	22010
Charger Kit with 120V AC Adapter	080926-22011-9	22011
40" USB cord	080926-22070-6	22070
SL-B26 Battery	080926-22101-7	22101
SL-B26 Batteries - 2PK*	080926-22102-4	22102
SL-B26 Batteries - 8PK*	080926-22105-5	22105
8-Unit Bank Charger - 12V DC	080926-20220-7	20220
8-Unit Bank Charger - 120V/100V AC	080926-20221-4	20221
8-Unit Bank Charger - 230V/240V AC	080926-20222-1	20222
8-Unit Bank Charger - batteries included - 12V DC	080926-20223-8	20223
8-Unit Bank Charger - batteries included - 120V/100V AC	080926-20224-5	20224
8-Unit Bank Charger - batteries included - 230V/240V AC	080926-20225-2	20225
Battery Carrier - Survivor X (for alkaline or SL-B26 models)	080926-90342-5	90342
Smoke Cutter® Plug Kit*	N/A	908019

* image not available