PRODUCT FACT SHEET

POLYSTINGER®
RECHARGEABLE FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Security, Fire & Rescue, Utility, Hardware/Tool, Automotive, Outdoor, Consumer

DESCRIPTION: Compact yet powerful, the rechargeable PolyStinger® is virtually indestructible due to its super-tough nylon polymer construction.

CASE MATERIAL: Super-tough, non-conductive nylon polymer with non-slip grip.
Available in black, yellow and olive drab green.

DIMENSIONS: Length: 7.34 in. (18.7 cm) Diameter: Major Diameter: 1.67 in. (4.24 cm)
Body Diameter: 1.15 in. (2.92 cm)

WEIGHT: 8.7 ounces (247 grams) with battery (included with purchase).

LENS: Unbreakable polycarbonate with scratch-resistant coating.

LIGHT SOURCE: Xenon gas-filled bi-pin bulb with 30 hour life. Spare stored in the end cap. Variable spot to flood beam.

LIGHT OUTPUT: 11,000 candela peak beam intensity and 210m beam distance when focused to spot.
90 lumens measured system output.

ON/OFF: Push-button head switch. Momentary or constant on.

RUN TIME: 1.25 hours to 10% of initial lumen output level.

BATTERY: 3-cell, 3.6 Volt Ni-Cd sub-C battery, rechargeable up to 1000 times.
3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times offered in 230VAC and 12VDC European systems.

CHARGING: 10 hours to fully recharge on 100V, 120V, 230V, 240V AC or 12V DC charge cords.
2.5-hour fast charger or PiggyBack® charger model available.

FEATURES: IPX4 rated design; water resistant operation.
2 meter impact resistance tested.
Serialized for positive identification.
Snap-in charger holder that mounts in any position.
LED charge-continuity indicator on charger holder

WARRANTY: **Streamlight's Limited Lifetime Warranty** warrants this product to be free of defect for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, bulbs, chargers, switches, electronics and normal wear and tear. Rechargeable batteries, chargers, switches and electronics have a two (2) year warranty with proof of purchase.

APPROVALS*: UL Listed for Class I, II Division 2.
Most models meet applicable European Community directives. CE

OPTIONAL ACCESSORIES: Safety wands, colored lens covers, infra-red lens cover, ring holder, holster, 5-Unit Back Charger, 2.5-hour fast charger or PiggyBack® charger that allows simultaneous charging of the light and a spare battery.

POLYSTINGER PERFORMANCE CURVE

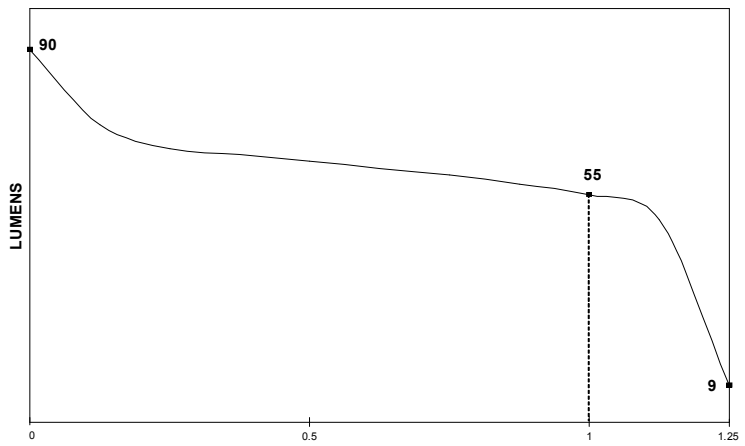

* See product for specific ratings.
All performance claims tested to ANSI/NEMA FL1-2009 Standard
Issued: 10/01/04
Revised: 06/27/11 **Rev:** 3

Assembled In The USA.

Document #102