

TL-2® X LITHIUM POWER STROBING TACTICAL FLASHLIGHT

MARKET
APPLICATIONS: Law Enforcement, Tactical Operations, Security

DESCRIPTION:

The TL-2® X is a high performance CR123A Lithium battery-powered flashlight offering high and low intensity modes, strobe mode and the latest in power LED technology. This light features a C4® LED for extreme brightness and illumination combined with a push button momentary or constant "on" tail cap switch for one handed operation and easy access to all modes. Removable spring steel pocket clip and adjustable wrist lanyard included.

CASE MATERIAL:

6000 Series machined aircraft aluminum with anodized finish. Available in black.

DIMENSIONS:

Length: 5.65 in. (13.33 cm)
 Head Diameter: 1.25 in. (3.18 cm)
 Barrel Diameter: 0.90 in. (2.29 cm)
 Diameter at Tri-Lobe Anti-Roll Flange: 1.44 in. (3.66 cm)

WEIGHT:

4.7 oz (129 grams) with batteries (included in purchase).

LENS:

High temperature glass lens, gasket sealed.

LIGHT SOURCE:

C4®LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See chart. Optimized electronics for regulated intensity.



Textured parabolic reflector produces smooth beam with optimum peripheral illumination to aid in navigation.

RUN TIME:

See chart. All claims to 10% of initial lumen output. Strobe: 6 continuous hours.

ON/OFF:

Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode.

BATTERY:

Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.

FEATURES:


C4®LED technology for extreme brightness.

IPX4 rated design; water resistant operation.

3 meter impact resistance tested.

Solid State Power Regulation provides maximum light output throughout battery life.

Serialized for positive identification.

Removable pocket clip.

Anti-roll head.

APPROVALS:

 Meets applicable European Community Directives. 
WARRANTY:

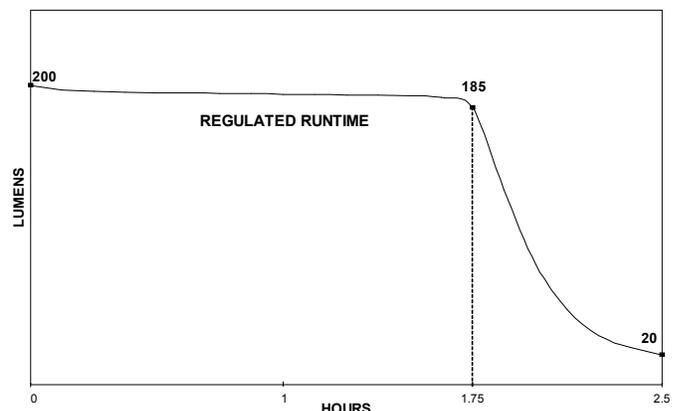
Streamlight's Limited Lifetime Warranty warrants this product to be free of defect, including the LED, for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, switches, electronics and normal wear and tear. Switches and electronics have a two (2) year warranty with proof of purchase.

OPTIONAL
ACCESSORIES:

Color Filters and IR "Flip Lens" cover, Holster, Rail mount, Remote switch.

	FL 1 STANDARD	HIGH	LOW
OUTPUT		200 LUMENS	10 LUMENS
RUNTIME		2h 30min	50h
DISTANCE		210m	47m
INTENSITY		11,000cd	550cd

Strobe Runtime: 6 hours

X PERFORMANCE CURVE


All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 12/06/2010

Revised: 03/22/2011 Rev: 1

Assembled In The USA.
Document #233